

 BRADY®

# i5300

**INDUSTRIAL LABEL PRINTER**

**Experience easy. No set up. No adjustments. No waste.**

# About BRADY



Once you have worked with BRADY, our name will stick with you, (just like our labels) because BRADY is one of the world's leading labelling and identification specialists.

## Innovative

At BRADY we continue to improve. We have many customers from all industries, and we strive to be ahead of their needs by continuing to invest in research for even more performant solutions. By developing more user-friendly and efficient concepts, we give our thousands of customers the best in the market.

## Strength

At BRADY, we believe our biggest strength is the wide range of identification and safety solutions we can offer our customers, whether it's labelling the smallest component or complete signage for an entire warehouse. We're also proud to offer many products and services - from printers, scanners and software to service contracts and on-site training - that compliment any identification job. And don't forget, our wide network of expert distributors can always offer you a tailor-made solution to meet your specific requirements.

## Trust

For over a hundred years, BRADY has been connected with quality, trust and stability. We demand the best for your products and services, because we know, better than anyone, the importance of good and reliable identification. Identification looks like a small detail, but every professional knows that this kind of detail is crucial to any business.

## Inform

We also have specialised dealers in your region, who can answer all your identification, safety and labelling questions, specific to your activity. They will be happy to provide you with all kinds of options and solutions with no obligation.

Microsoft is a trademark of Microsoft Corporation, Bluetooth is a trademark of Bluetooth Sig, Inc., Android is a trademark of Google Inc.



Brady products are sold on the condition that the purchaser will test them in actual use and determine for himself/herself their suitability to his/her intended purpose. Brady warrants to the purchaser that Brady products are free from defects in material and workmanship but limits its obligation under this warranty to the replacement of the product which has been shown to Brady's satisfaction to have been defective at the time of its purchase.

The warranty does not extend to any persons who have acquired the product from the purchaser. It is in lieu of any other warranty, including every warranty of sale-ability, marketability or suitability for the intended purpose, and is also in lieu of any other obligation or liability on the part of Brady.

Under no circumstances will Brady be liable for losses, damage, costs or subsequent damage of whatever nature which may arise in connection with the use of, or inability to use, Brady's products.

# Experience easy. No set up. No adjustments. No waste.

## BradyPrinter i5300 Industrial Label Printer

### The Brady Advantage

When it comes to identification, safety and compliance, there's a clear advantage to working with Brady. We put our customers first in everything we do.

Our goal is to give you an unrivalled customer experience. We are relentlessly committed to performance and excellence - in our products, services and people.

Our products and solutions perform in ways that others simply can't match. Our people perform in ways that regularly exceed your expectations. And our focus and discipline work toward solid, long-term performance for our customers.

In short, Brady is the company you trust when performance matters most.

Learn more about the Brady Advantage at:  
[www.bradyeurope.com](http://www.bradyeurope.com)

### Table of contents

4	Seriously easy. Really.
6	Better starts with Brady
8	Easy. Inside and out.
10	The righth technology
12	Going to the distance
14	Experience easy.
16	Print ribbons
18	Master material index
22	Product and general purpose identification
28	Electronics identification
31	Electrical / Datacom identification
34	Wire and cable identification - Datacom/Electrical
45	Facility & safety identification
55	Laboratory identification
62	Software
63	Printer specifications



BradyPrinter i5300  
Industrial Label Printer



Compatible labels  
& ribbons



Software for label creation  
and data integration



Printer technical  
specifications

# SERIOUSLY EASY. REALLY.

When you're focused on efficiency, every process counts, including the steps it takes to print. So why not make it easier? Knowing everyone recognises the value of a hassle-free experience, Brady created the BradyPrinter i5300 Industrial Label Printer. It's Intuitive. It's easy to operate. And, it's built for efficiency.



## No wasted labels

Maximise material use and cut costs. Print on the very first label.




## 20-second setup

Change materials in just 20 seconds with drop-lock-print technology.



## Pinpoint precision

Get better print placement and greater small-font sharpness.



## Everyday operation

Save time with faster printing. Pause and resume jobs easily.





**BRADY**

2-88509-102-109 REV C

BradyPrinter i5300

2-88509-102-101 REV C  
2-88509-102-100 REV C  
2-88509-102-100 REV C  
2-88509-102-099 REV C  
2-88509-102-099 REV C  
2-88509-102-098 REV C  
2-88509-102-098 REV C  
2-88509-102-097 REV C  
2-88509-102-097 REV C

# BETTER STARTS WITH BRADY

The performance you need. From the name you trust.

## KEY FEATURES




### **No wasted labels - prints on the first one**

No calibration is required, so there are no wasted labels and no trial and error during setup.



### **i5300 - 20-second supply changeovers**

There are no sensor, heat or speed adjustments. Just drop, lock and print to reduce setup time.

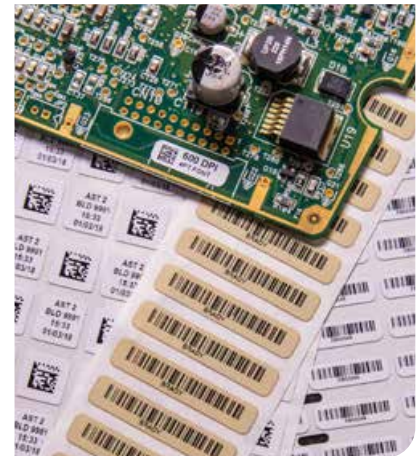

### **300- and 600-dpi print-resolution models**

Prints small fonts with excellent precision and accuracy for electronics, product and laboratory identification.



### **1-click label part recognition and setup**

Software, printer and materials communicate to allow 1-click auto setup of labels.



### **Faster print speeds for all job sizes**

Get efficient, large-job printing with better performance and higher throughput.



### **Rugged construction for mid to high volumes**

Metal-frame construction and internal print engine are designed for high performance.

# **BradyPrinter i5300**

## **Industrial Label Printer**

# Easy. Inside and out.

When it comes to the BradyPrinter i5300 Industrial Label Printer, everything's easy. Taking just seconds to set up and load, it offers a faster, easier start-to-print process. That's because it's designed for efficiency — no setup, no adjustments and no waste. Zero. Enjoy time-saving features like a print queue and interrupt function. Plus, get precision printing on 1,300 parts. All this so you can reach your high-mix, high-volume printing goals. Ready? We told you it was going to be easy.

## Rugged design

Solid construction with metal framing and gearing for higher throughput and workhorse durability

## Built-in, programmable auto-cutter

Cuts off material after a job, after a label or not at all

## Big 7" color touchscreen

Large icons are user-friendly and allow for faster navigation

## Intuitive interface


Communicates installed part numbers, remaining supply, status, in-job navigation and label preview

## Smart media rolls

PrintSmart Technology pre-optimises speed, heat, size and ribbon / material-pairing settings, eliminating trial and error and wasted materials

## Media guides and integrated sensors

Sensors automatically align when guides squeeze together — no adjustments, and no alignment trial and error

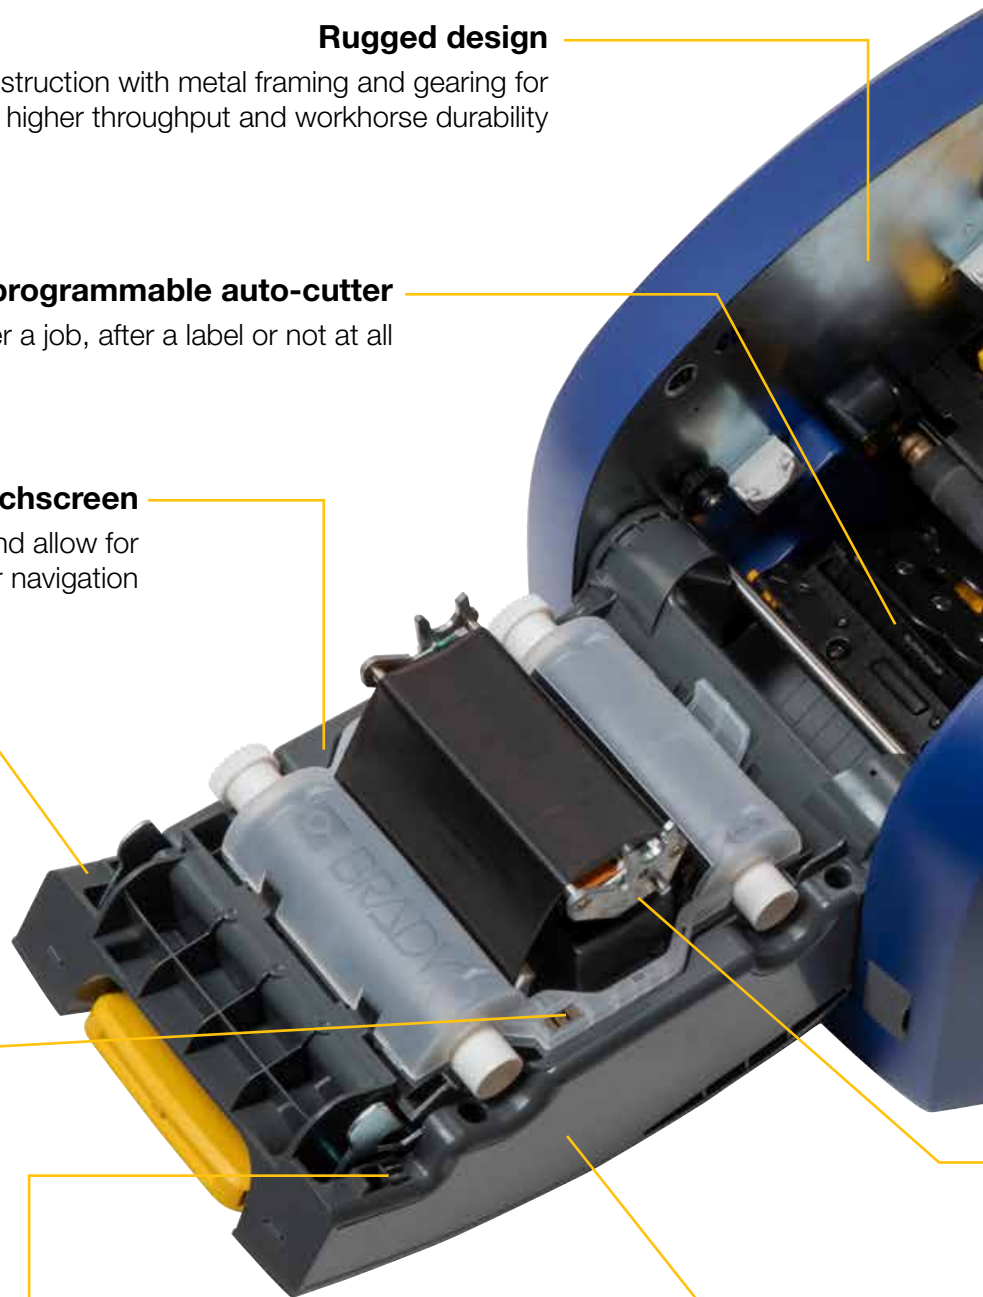



**6 mm to 10 mm label widths**

Prints small labels for electronics and laboratories, and also larger labels up to 10 mm wide

**Easy loading; 20-second changeovers**

Labels and ribbons drop in with no thread-through, orientation checks or wasted materials

**Double-side wire sleeve printing**

External feed slot and print app enable 2-pass printing for double-side heat-shrink sleeves

**Fast print speed**

Auto-set at 1 to 10 inches per second, but user-override allows for faster printing

**Connectivity and ports**

3 USB ports and Ethernet, with optional Wi-Fi / Bluetooth

**Field-replaceable print roller**

Easily replace a damaged or worn roller to ensure optimal print quality

**Field-replaceable printhead**

Tool-less printhead replacement using a single-release pin and connectors (replace with same dpi printhead only)

**Print queue**

Print immediately, store or customise the order in which jobs print


# THE RIGHT TECHNOLOGY

from the right partner

## i5300 with Brady Print Technology

Elevate your performance with i5300. It's got Brady Print Technology — an advanced system that enables the printer, ribbon and materials to “talk to each other. The result: easy-to-use features like auto setup, auto part recognition and auto adjustments that save you time and money.



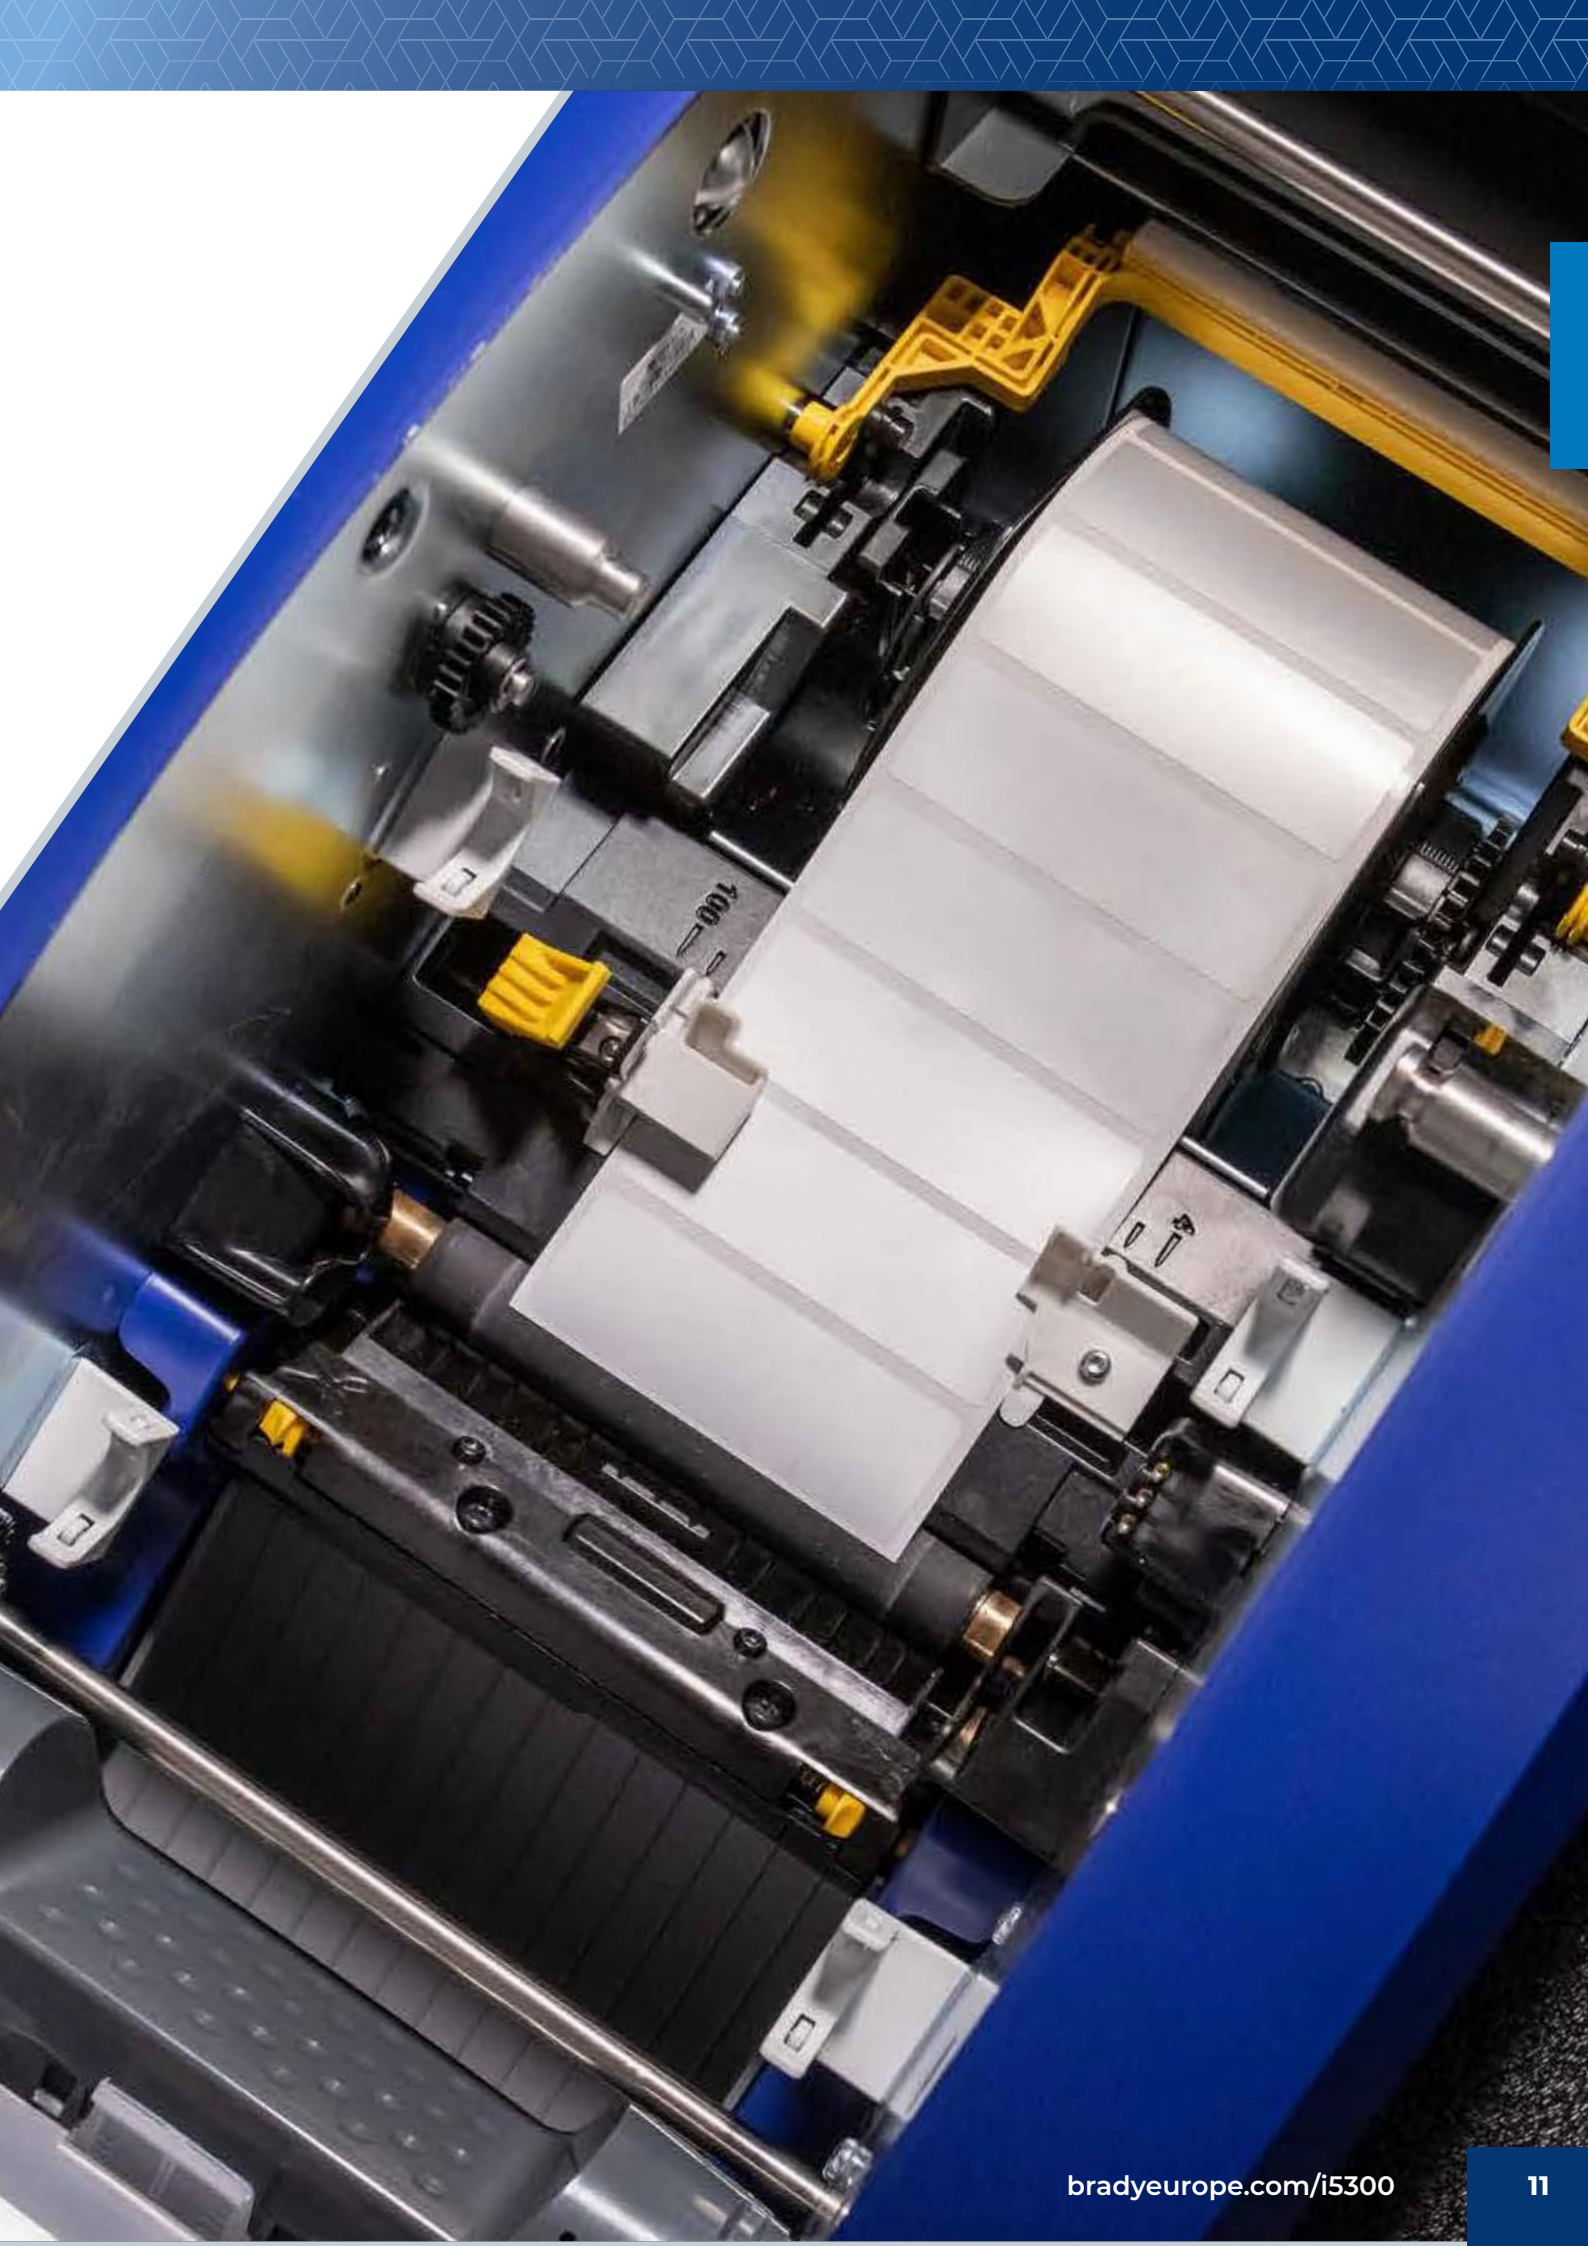

# Going the distance

At Brady, we go the distance to make sure you get what you need. Whether it's field work or lab work, we've got materials for every application.



## Information that stays put

Barcodes, images, and small text—your most important information needs to stay put in any type of environment.



## High performance materials

From freezing temperatures to blistering heat, when used with solvents or in outer space, Brady materials are all about high performance.



## Durability and flexibility

Brady's R&D program focuses on solutions that bring durability, flexibility and efficiency to every workday.



## Hundreds of labels

We offer hundreds of labels, so be sure to browse through the entire collection. And, as always, let us know if you need more.



COLINEA

WARNING

RELAY A5  
RELAY A4  
RELAY A3  
RELAY A2  
RELAY A1

RELAY A5  
RELAY A4  
RELAY A3  
RELAY A2  
RELAY A1

N45 STUDY  
MB45  
MMB-00765  
02-04-2018  
Newark NJ

Model MMB-00765  
Ser No. 02-04-2018  
Manuf Date Newark NJ  
Location

Model MMB-00765  
Ser No. 02-04-2018  
Manuf Date Newark NJ  
Location



# Experience easy.

No set up. No adjustments. No waste.



## Printer options



This i5300 Industrial Label Printer comes in a cardboard box. It ships with a Brady WorkStation Basic Design Suite, a Power Cable, a USB Cable, a Stylus, a cleaning kit, a QuickStart Guide, a Jump drive with How To Videos and 3rd Party Win Driver.

## ACCESSORIES

Article No.	Order Ref.	Description
133251	PCK-6	Printer Cleaning Kit, Thermal Transfer Printers
148703	BBP35-37-WIPER	Media Wiper
153661	I5300-PH-300D	i5300 Print Head 300 dpi
153662	I5300-PH-600D	i5300 Print Head 600 dpi
153663	I5300-PR-115MM	i5300 Print Roller

## PRINTERS - 300 DPI

Article No.	Order Ref.	Description
151274	I5300-C-EU	BradyPrinter i5300 - EU
322890	i5300-C-EU-BWS	BradyPrinter i5300 - EU + Brady Workstation Suite
151272	I5300-C-NA	BradyPrinter i5300 - NA
322892	i5300-C-NA-BWS	BradyPrinter i5300 - NA + Brady Workstation Suite
151276	I5300-C-UK	BradyPrinter i5300 - UK
322891	i5300-C-UK-BWS	BradyPrinter i5300 - UK + Brady Workstation Suite

## WiFi PRINTERS - 300 DPI

Article No.	Order Ref.	Description
151275	I5300-C-EU-WF	BradyPrinter i5300 with Wi-Fi - EU
322893	i5300-C-EU-WF-BWS	BradyPrinter i5300 with Wi-Fi - EU + Brady Workstation Suite
151273	I5300-C-NA-WF	BradyPrinter i5300 with Wi-Fi - NA
322895	i5300-C-NA-WF-BWS	BradyPrinter i5300 with Wi-Fi - NA + Brady Workstation Suite
151277	I5300-C-UK-WF	BradyPrinter i5300 with Wi-Fi - UK
322894	i5300-C-UK-WF-BWS	BradyPrinter i5300 with Wi-Fi - UK + Brady Workstation Suite

## PRINTERS - 600 DPI

Article No.	Order Ref.	Description
151283	I5300-600C-EU	BradyPrinter i5300 - EU
322896	i5300-600-EU-BWS	BradyPrinter i5300 - EU + Brady Workstation Suite
151281	I5300-600C-NA	BradyPrinter i5300 - NA
322898	i5300-600-NA-BWS	BradyPrinter i5300 - NA + Brady Workstation Suite
151285	I5300-600C-UK	BradyPrinter i5300 - UK
322897	i5300-600-UK-BWS	BradyPrinter i5300 - UK + Brady Workstation Suite

## WiFi PRINTERS - 600 DPI

Article No.	Order Ref.	Description
151284	I5300-600C-EU-WF	BradyPrinter i5300 with Wi-Fi - EU
322899	i5300-600WF-EU-BWS	BradyPrinter i5300 with Wi-Fi - EU + Brady Workstation Suite
151282	I5300-600C-NA-WF	BradyPrinter i5300 with Wi-Fi - NA
322902	i5300-600WF-NA-BWS	BradyPrinter i5300 with Wi-Fi - NA + Brady Workstation Suite
151286	I5300-600C-UK-WF	BradyPrinter i5300 with Wi-Fi - UK
322900	i5300-600WF-UK-BWS	BradyPrinter i5300 with Wi-Fi - UK + Brady Workstation Suite

# PRINT RIBBONS

## without the wrangling



Get the right ribbon for every print job with the i5300's Brady Print Technology. Qualified, pre-tested ribbons eliminate heat, speed and size adjustments. There's no trial and error, and there are no wasted labels.

### 5-second ribbon installation

- ▶ Tough, smear-proof ribbons that produce long-lasting printed text
- ▶ Print can withstand years in industrial areas and outdoor conditions
- ▶ Ribbons supplied in self-contained cartridges that drop straight into the printer with a "click"
- ▶ No calibrating, no threading, no waste, no hassle and the ink will always be facing the right direction
- ▶ Printer notifies user if installed ribbon is not recommended for the installed labels

Order Reference	Colour	Width (mm) x Length (m)
B30-R10000	Black	110.00 x 60.00
B30-R10000-BL	Blue	110.00 x 60.00
B30-R10000-GN	Green	110.00 x 60.00
B30-R10000-OR	Orange	110.00 x 60.00
B30-R10000-RD	Red	110.00 x 60.00
B30-R10000-WT	White	110.00 x 60.00
B30-R10000-YL**	Yellow	110.00 x 60.00
B30-R6000HF	Black	110.00 x 60.00
B30-R4300	Black	110.00 x 60.00
B30-R6600	Black	110.00 x 60.00
B30-R4400-WT	White	110.00 x 60.00
B30-R4500*	Silver	110.00 x 60.96
B30-R6700-WT	White	110.00 x 60.00
B30-R6400	Black	110.00 x 60.00
B30-R6200	Black	110.00 x 60.00
B30-R60000C***	Black	110.00 x 60.00
B30-R6300	Black	109.98 x 60.96



\*This ribbon is for use with B-342 and B-345 black PermaSleeves only

\*\*For printing yellow onto white B-595 use B30-R10000-YL. For printing yellow onto other colours of B-595 use B30-R10000-YL2

\*\*\*Black Heavy-Duty print ribbon to print Ochre B-595

Brady Material No.	Material		B30-R4300 Black	B30-R4400-WT White	B30-R4500 Silver	B30-R6000HF Black	B30-R6200 Black	B30-R6300 Black	B30-R6400 Black	B30-R6600 Black	B30-R6700-WT White	B30-R10000 Black	B30-R10000-WT White	B30-R10000 Blue
B-342	Heat-shrink Polyolefin	Matt	✓		✓					✓				
B-345	High Temperature Heat-shrink Polyvinylidene Fluoride Sleeve	Matt		✓		✓				✓				
B-413	Metallic, Non-metal Polyester	Satin				✓	✓							
B-417	Self-laminating Vinyl	Matt	✓				✓							
B-422	Polyester	Gloss				✓	✓							
B-423	Polyester	Gloss				✓	✓							
B-424	Paper	Matt	✓											
B-425A	Polypropylene	Matt	✓						✓					
B-427	Self-laminating Vinyl	Matt	✓											
B-428/B-966B	Metallised Polyester with Polyester Overlaminate	Gloss	✓				✓							
B-428	Metallised Polyester	Matt	✓											
B-430	Polyester	Gloss		✓		✓	✓							
B-432	Polyester	Gloss		✓		✓								
B-434A	Metallised Polyester	Gloss				✓								
B-435A	Metallised Polyester	Gloss				✓								
B-437	Polyvinylfluoride	Matt	✓											
B-438	Tamper-evident Metallised Polyester	Matt	✓										✓	
B-461	Self-laminating Polyester	Matt	✓				✓							
B-472	Polyimide	Matt	✓				✓							
B-481	StainerBondz™ Polyester	Matt							✓					
B-483A	Polyester	Gloss				✓								
B-484A	Polyester	Gloss				✓								
B-486B	Metallised Polyester	Matt	✓											
B-488	Polyester	Matt	✓											
B-489A	Polyester	Matt	✓											
B-490	FreezerBondz™ Polyester	Matt	✓											
B-492	FreezerBondz™ Polyester	Matt							✓					
B-498	Vinyl Cloth	Semi-gloss	✓				✓							
B-499	Nylon Cloth	Matt	✓			✓	✓							
B-509	Magnetic Polyester	Matt				✓						✓		✓
B-526	Phosphorescent Polyester	Gloss				✓						✓		✓
B-549	Polyester	Gloss								✓		✓	✓	✓
B-551	Polyester	Matt				✓						✓	✓	✓
B-565	Metallised Polyester	Matt				✓						✓		
B-569	Polyester	Gloss				✓						✓	✓	✓
B-581	Vinyl	Gloss				✓						✓	✓	✓
B-584	Reflective Tape	Gloss				✓						✓	✓	✓
B-593	Polyester	Gloss		✓		✓								
B-595	Vinyl	Gloss				✓					✓	✓	✓	✓
B-767	Polyimide	Gloss				✓								
B-768	Polyimide	Gloss				✓								
B-719	Polyimide	Matt				✓								
B-724	Polyimide	Matt	✓											
B-727	Polyimide	Gloss				✓								
B-728	Polyimide	Matt				✓								
B-729	Polyimide	Matt				✓								
B-777	Polyimide	Gloss							✓					
B-854	Metal Detectable Polyester	Matt				✓								
B-855	Polyester	Matt				✓								
B-7563	Metallised Polyester	Satin				✓	✓							
B-7569	Vinyl	Gloss				✓						✓	✓	✓
B-7597	Polyethylene	Matt	✓											
B-7641	Heat-shrink Polyolefin	Matt				✓								
B-7642	Heat-shrink Polyolefin	Matt	✓						✓					
B-8423	Polyester	Satin				✓	✓							
B-8591	Polymer	Gloss								✓				

\*This ribbon is for use with B-342 and B-345 Black PermaSleeves only

# MASTER MATERIAL INDEX

Need more information? View the technical data sheets Brady offers online access to technical data sheets for all Brady materials. View by a specific B-Number or search by relevant keywords. Visit [www.bradyeurope.com/tds](http://www.bradyeurope.com/tds).

Brady Material No.	Material	Finish	Colour	Temp (°C) (Tested for 30 days)		Properties & Applications	Approval/Compliance
				Min.	Max.		
B-342	Heat-shrink Polyolefin	Matt	White	-55 °C	130.6 °C	3:1 ratio heat shrinkable wire marking sleeve that fits snugly around wires for identification and protection. Fade-resistant and flame retardant. Also available in yellow and black.	UL Recognised to UL224SAE-AMS-DTL-23053/5 C (Class 1)SAE AS-81531
B-345	High Temperature Heat-shrink Polyvinylidene Fluoride	Matt	White	-70 °C	130.6 °C	2:1 ratio heat shrinkable wire marking sleeve specifically designed for high temperature and low vacuum outgassing applications. These heat shrinkable wire marking sleeves are made from irradiated high temperature PVDF. Also available in black.	NASA SP-R-0022A Outgassing PerformanceSAE-AMS-DTL-23053/18 (Class 2)SAE AS-81531MIL-STD-202G Method 215K
B-348	Polyolefin	Matt	White	-55 °C	105 °C	Brady's B-348 High Performance material complies with the minimal smoke and halogen emission requirements of the most stringent underground standards for high-performance vehicles. The material is printable on-site and in the field, making it a practical solution for identifying thick cables and cable bundles. B-348 has proven to be highly durable, exhibiting excellent UV resistance. Available in white and yellow colours.	EN-45545-2, requirement 24, Vehicle Category HL3
B-403	Paper	Matt	Black on White	-70 °C	100 °C	White dissolvable paper. Dissolves completely in water leaving no adhesive residue, ideal for temporary labelling applications	–
B-413	Metallic, Non-metal Polyester	Satin	Light Grey	-70 °C	110 °C	Thermal transfer printable polyester material with metallic-looking finish (non-metallised). Ideal for barcoded asset tracking and rating plate applications.	UL RecognisedcUL Recognised
B-417	Self-laminating Vinyl	Matt	White	-40 °C	70 °C	Keep your wire identification secure with this self-laminating marker with extra-strong adhesive. The extra-strong adhesive makes these markers ideal for small-diameter wires. Features a white printable area and a clear tail that wraps around the marker.	UL Recognised to UL969 Labelling and Marking Standard when printed with the Brady Series R4300 and R7950 ribbons. See UL files MH62024 for specific details. Brady customers should specify at purchase if they require UL Recognised B-417 labels. Brady sells both UL Recognised B-417 labels and non-approved labels depending on customer requirements
B-422	Polyester	Gloss	White	-40 °C	100 °C	White material stock with glossy finish and 2 mils of adhesive for rough surface applications, including low surface energy plastics. Designed to withstand solvent exposure. UL rated for surfaces commonly used in solar panel manufacturing. Also used for component identification, barcoding, asset and inventory tracking.	UL RecognisedCSA Accepted
B-423	Polyester	Gloss	White	-70 °C	110 °C	White polyester thermal transfer printable material with a glossy finish. Widely used for component identification, barcoding, asset and inventory tracking. UL rated for surfaces commonly used in solar panel manufacturing.	UL RecognisedCSA AcceptedHalogen Free (DIN VDE 0472/part 815) Approvals are for White material only
B-424	Paper	Matt	White	-40 °C	50 °C	White paper material with matt finish and smooth top coat finish for thermal transfer printing. Good contrast and smear resistance for thermal barcode printing. Used for general purpose labeling applications	–
B-425A	Polypropylene	Matt	White	-70 °C	80 °C	White polypropylene material stock with matt finish for thermal transfer printing or write-on applications. Excellent solvent resistance and print performance; not recommended for long-term outdoor use.	UL RecognisedCSA AcceptedHalogen Free (DIN VDE 0472/part 815)
B-427	Self-laminating Vinyl	Matt	White	-40 °C	60 °C	Thermal transfer printable, self-laminating material. These labels have a printable area with a clear "tail" that wraps around the marker. The "tail" serves as overlaminates to protect the print. Superior resistance to abrasion, solvents, water, oil and dirt. Also available in grey, brown, green, yellow, blue, red, purple, orange.	UL Recognised to UL969 Labelling and Marking Standard when printed with the Brady Series R4300 and R6200 ribbons. See UL files MH17154 for specific details. Brady customers should specify at purchase if they require UL Recognised B-427 labels. Brady sells both UL Recognised B-427 labels and non-approved labels depending on customer requirements.
B-428	Metallised Polyester	Matt	Light Grey	-70 °C	120 °C	Thermal transfer printable metallised polyester with matt finish. Withstands solvents and variable temperatures. Excellent for serial and rating plate applications with name-plate quality and a metal-looking finish.	UL RecognisedCSA AcceptedAGA ApprovedHalogen Free (DIN VDE 0472/part 815)

# MASTER MATERIAL INDEX

Brady Material No.	Material	Finish	Colour	Temp (°C) (Tested for 30 days)		Properties & Applications	Approval/Compliance
				Min.	Max.		
B-428/ B-966B	Metallised Polyester with Polyester Overlaminat	Gloss	Light Grey	-70 °C	120 °C	A Metallised polyester label that comes with a separate overlaminat to be applied over the label once printed. This way the label remains clear and easy-to-read, even in harsh environments. Overlaminat is a clear polyester (B-966B) that extends outside of label on each side when applied.	–
B-430	Polyester	Gloss	Transparent	-70 °C	100 °C	Translucent, high performance polyester material with a glossy finish. Thermal transfer printable.	UL RecognisedCSA Accepted
B-432	Polyester	Gloss	Transparent	-40 °C	100 °C	Translucent, high performance polyester material with a glossy finish. Thermal transfer printable. Very similar to B-430, but has a thicker layer of acrylic adhesive for better adherence to rough surface applications.	UL RecognisedCSA Accepted
B-434A	Metallised Polyester	Gloss	Silver	-40 °C	90 °C	Metallised polyester with a glossy finish and a thicker layer of adhesive for better adherence to rough surface applications. Withstands numerous solvents while maintaining excellent image quality.	UL RecognisedCSA Accepted
B-435A	Metallised Polyester	Gloss	Silver	-40 °C	90 °C	Printable metallised polyester withstands numerous solvents and variable temperatures. Ideal for serial and rating plate applications with name-plate quality and a metal looking finish.	UL RecognisedCSA Accepted
B-437	Polyvinylfluoride	Matt	White	-70 °C	135 °C	Polyvinylfluoride label material with matt finish. Used in wire and cable identification applications where self-extinguishing features are required. This label material utilises an adhesive for heavy-duty applications and is available in continuous or die-cut formats. Excellent resistance to water, oil and other common fluids. Also available in yellow.	MIL-M-87958 Pressure Sensitive Adhesive Wire or Cable Marker and Identification specification
B-438	Tamper-evident Metallised Polyester	Matt	Silver	-40 °C	40 °C	Metallised polyester material with matt finish. Leaves a checkerboard footprint on the surface when removed; the pattern also appears on the top of the label to prevent it from being reused.	UL RecognisedCSA Accepted
B-439	Vinyl	Gloss	Green	-70 °C	40 °C	Available in Blue, Green, Orange, Red, White and Yellow	–
B-461	Self-laminating Polyester	Matt	White, Transparent	-196 °C	110 °C	Permanent adhesive; suitable for liquid nitrogen application if material is wrapped around itself, as in self-lamination; write-on capabilities. Temperature range increases to 121°C when used in autoclave process	–
B-472	Polyimide	Matt	White	-70 °C	100 °C	Cable and wire bundle applications and label applications where self-extinguishing properties are required	–
B-480A	Metallic, Non-metal Polyester	Satin	Silver	-70 °C	110 °C	Thermal transfer printable polyester material with metallic-looking finish (non-metallised) and aggressive adhesive for powder coats or rough surface applications. Ideal for barcoded asset tracking and rating plate applications.	UL RecognisedcUL Recognised
B-481	StainerBondz™ Polyester	Matt	White	-80 °C	130 °C	White polyester will remain resistant when exposed to xylene and other chemicals that are commonly used in the slide staining process	–
B-483A	Polyester	Gloss	White	-40 °C	120 °C	White polyester thermal transfer printable material with glossy finish and aggressive adhesive specifically designed for powder coated surfaces.	UL RecognisedCSA Accepted
B-484A	Polyester	Gloss	White	-40 °C	120 °C	White polyester thermal transfer printable material, similar to B-483, but with thinner construction for curved or angled surfaces. Offers aggressive adhesive for adhesion to textured metals and low surface energy plastics.	UL Recognised
B-486B	Metallised Polyester	Matt	Light Grey	-40 °C	120 °C	Thermal transfer printable metallised polyester material. Designed for high adhesion to textured metals, powder coated surfaces and low surface energy plastics.	UL RecognisedCSA Accepted
B-488	Polyester	Matt	White	-40 °C	145 °C	White polyester thermal transfer printable material, similar to B-423, but with matt finish. Widely used for component identification, barcoding, asset and inventory tracking.	–
B-489A	Polyester	Matt	White	-40 °C	120 °C	White polyester thermal transfer printable material, similar to B-483, but with matt finish. Aggressive adhesive specifically designed for powder coated surfaces.	UL RecognisedCSA Accepted
B-490	FreezerBondz™ Polyester	Matt	White	-196 °C	130 °C	Can be applied to frozen surfaces including glass and polypropylene stored in liquid nitrogen, except for Vial Tops. Material must slightly overlap itself.	–
B-492	FreezerBondz™ Polyester	Matt	White	-196 °C	110 °C	Ultra thin; can label frosted/frozen (with overlap) or room temperature labels and lasts in liquid nitrogen and hot water baths	–

# MASTER MATERIAL INDEX

Brady Material No.	Material	Finish	Colour	Temp (°C) (Tested for 30 days)		Properties & Applications	Approval/Compliance
				Min.	Max.		
B-498	Vinyl Cloth	Semi-gloss	White	-40 °C	80 °C	White vinyl cloth label material with glossy finish. The adhesive and cloth backing give excellent holding power, while being repositionable and removing cleanly.	UL Recognised
B-499	Nylon Cloth	Matt	Black on White	-40 °C	90 °C	Nylon cloth material with matt finish. The adhesive allows labelling in environments with heat, cold, oil and dirt. Also available in yellow.	UL Recognised CSA Accepted Halogen Free (DIN VDE 0472/part 815) Approvals are for White material only
B-509	Magnetic Polyester	Matt	White	-18 °C	70 °C	Magnetic Back Polyester is used for temporary, reusable and movable signs	–
B-526	Phosphorescent Polyester	Gloss	Photolum. Green	-40 °C	60 °C	BradyGlo™ High Intensity laminate is designed to provide high adhesion and luminance for egress marking in low light areas in and along stairwells of public buildings, exit and directional signs, identification of fire alarms and extinguishers, low location egress pathway markings, and directional systems for escape or evacuation routes.	New York Local Law 26 RS 6-1 & 6-1A City of New York, Department of Buildings MEA No. 467-06-M UV: 46-9-7
B-549	Polyester	Gloss	White	-40 °C	100 °C	Flexible, dimensionally stable, low temperature, pressure sensitive adhesive tape for permanent application. Adhesive can be applied at temperatures down to -10°F (-23°C).	–
B-551	Polyester	Matt	White	-40 °C	89 °C	Tag material used for marking on-the-spot warning of dangerous conditions	Complies to OSHA 1910.145(f) when printed with required signal word and major message.
B-565	Metallised Polyester	Matt	Silver	-40 °C	110 °C	Designed for applications like identification labels or rating and serial plates that utilise barcodes, alphanumerics, graphic symbols and logos and require nameplate-like quality	–
B-569	Polyester	Gloss	Green	-40 °C	100 °C	Designed for use on stainless steel pipes in harsh environments such as the Pulp and Paper Industry	–
B-581	Vinyl	Gloss	White	-40 °C	82 °C	Only indoor use, where frequent repositioning is required	–
B-584	Reflective Tape	Gloss	Orange	-40 °C	70 °C	Suitable for outdoor use. Also available in silver and yellow.	–
B-593	Polyester	Gloss	White	-20 °C	100 °C	EPREP (Engraved Panel REplacement labels) are designed for patch panel identification in identifying external push-buttons, switches and internal connection points. Also available in black, green, red, silver and yellow.	UL Recognised cUL Recognised
B-595	Vinyl	Gloss	White	-40 °C	82 °C	Durable, low-shrink vinyl with our most aggressive adhesive. Conforms to irregular, curved, rough and highly textured surfaces (painted cinder blocks, uneven wood, textured plastics, paper-jacketed pipes, powder-coated surfaces). Adheres to "difficult" low-surface energy items (PVC piping, blow-moulded equipment cases, ABS plastics, recycled plastics). Available in a wide range of colours.	BS 5609:1986 Section 2 and section 3
B-618	Polyester	Matt	White	-70 °C	120 °C	Ideal for rating plate applications and general-purpose labelling with high-quality barcodes and graphics. Film contains recycled PET.	UL Recognised cUL Recognised
B-717	Polyimide	Gloss	White	-70 °C	300 °C	White polyimide material with glossy finish and ultra-durable adhesive. Used in printed circuit board and electronic component pre-process labelling. Designed for use with extreme wash protocol and cleaning chemicals. Surface resistivity values in the recommended range for dissipative ESD packing materials.	UL Recognised ANSI/ESD S541-2008 (between 10 and 10 ohms) for dissipative ESD packaging materials MIL-STD-202G Method 215K
B-718	Polyimide	Gloss	White	-70 °C	300 °C	White polyimide material, low profile (1 mil thickness), with glossy finish and ultra-durable adhesive. Used in printed circuit board and electronic component pre-process labelling. Designed for use with extreme wash protocol and cleaning chemicals. Surface resistivity values in the recommended range for dissipative ESD packing materials.	UL Recognised ANSI/ESD S541-2008 (between 10 and 10 ohms) for dissipative ESD packaging materials MIL-STD-202G Method 215K
B-719	Polyimide	Matt	White	-70 °C	300 °C	White polyimide material with matt finish and ultra-durable adhesive. Used in printed circuit board and electronic component pre-process labelling. Designed for use with extreme wash protocol and cleaning chemicals. Surface resistivity values in the recommended range for dissipative ESD packing materials.	UL Recognised ANSI/ESD S541-2008 (between 10 and 10 ohms) for dissipative ESD packaging materials MIL-STD-202G Method 215K
B-724	Polyimide	Matt	Amber	-70 °C	300 °C	Amber polyimide material with matt finish and ultra-durable adhesive. Used in printed circuit board and electronic component pre-process labelling. Designed for use with extreme wash protocol and cleaning chemicals.	MIL-STD-202G, Notice 12, Method 215K SAE AS81531 Marking of Electrical Insulating Material

# MASTER MATERIAL INDEX

Brady Material No.	Material	Finish	Colour	Temp (°C) (Tested for 30 days)		Properties & Applications	Approval/Compliance
				Min.	Max.		
B-727	Polyimide	Gloss	White	-70 °C	300 °C	White polyimide material with glossy finish and ultra-durable adhesive. Used in printed circuit board and electronic component pre-process labelling. Designed for use with extreme wash protocol and cleaning chemicals.	UL Recognised MIL-STD-202G, Notice 12, Method 215K Dibutyltin and Dioctyltin free
B-728	Polyimide	Matt	White	-70 °C	300 °C	White polyimide material with matt finish and ultra-durable adhesive. Used in printed circuit board and electronic component pre-process labelling. Designed for use with extreme wash protocol and cleaning chemicals.	UL Recognised MIL-STD-202G, Notice 12, Method 215K
B-729	Polyimide	Matt	White	-70 °C	300 °C	White polyimide material, low profile (1 mil thickness), with matt finish and ultra-durable adhesive. Used in printed circuit board and electronic component pre-process labelling. Designed for use with extreme wash protocol and cleaning chemicals.	UL Recognised MIL-STD-202G, Notice 12, Method 215K
B-7425	Polypropylene	Matt	Black on White	-80 °C	70 °C	White Polypropylene material. Ideal for laboratory identification such as vials, centrifuge tubes and test tubes. For freezer or liquid nitrogen applications, B-7425 must be applied prior to being frozen.	–
B-7563	Metallised Polyester	Satin	Silver	-40 °C	135 °C	Thermal transfer printable metallised polyester withstands numerous solvents and variable temperatures. Ideal for serial and rating plate applications with name-plate quality and a metal looking finish.	UL Recognised
B-7569	Vinyl	Gloss	White	-20 °C	75 °C	Used for Pipe Markers, Arrow Tape, Warehouse Marking, Floor Marking, Warning Panels, Safety Signs and Hazardous Substance Identification. Available in a wide range of colours.	BS 5609:1986 Section 2 and section 3
B-7597	Polyethylene	Matt	White	-40 °C	100 °C	Polyethylene tag material. Resists tearing and the topcoat resists smudging and abrasion. Halogen free material.	Halogen Free (DIN VDE 0472/part 815)
B-7598	Polyester	Gloss	White, Yellow, Red, Green, Silver, Black, Blue	-40 °C	100 °C	A general identification polyester tag for cables exposed to extreme conditions. Up to 10 years outdoor durability. Also available in black, blue, green, red, silver and yellow.	Parts supplied in White, Black or Silver are Halogen Free as per IEC 61249-2-21 (2003-11)
B-7599	Polyethylene	Matt	Yellow	-40 °C	50 °C	White polyethylene tag material. Rapido™ Wiremarking Sleeves are fast and easy to apply. Simply squeeze the edges of the material together, thread your wire through the holes and pull away the wire to release the marker.	–
B-7641	Heat-shrink Polyolefin	Matt	White	-55 °C	105 °C	2:1 ratio heat shrinkable, zero halogen wire marking sleeves. The wire marking sleeves offer outstanding fire safety properties and minimal smoke emission. Also available in yellow.	BS-6853 (1999) Vehicle Category 1A; EN-45545-2, requirement 24, Vehicle Category HL3 Zero Halogen
B-7642	Heat-shrink Polyolefin	Matt	White	-40 °C	120 °C	2:1 ratio heat shrinkable wire marking sleeves. The sleeves are high-temperature rated, highly flame retardant, and very flexible.	–
B-7643	Thermoplastic Polyether Polyurethane	Matt	White, Yellow	-40 °C	90 °C	Thermal transfer and dot matrix printable wire and cable bundle tag for harsh environments. Low halogen material. Also available in black, orange, red and yellow.	Halogen requirements of IEC 61249-2-21 (2003-11)
B-7696	Vinyl	Gloss	White, Yellow	-40 °C	70 °C	Brady DuraSleeve® printable inserts create a durable legend. The rigid construction of the DuraSleeve wire marking system provides inserts that can easily be inserted into a clean carrier. The legend can be changed before or after termination. Also available in yellow.	UL94 V0
B-777	Polyimide	Gloss	White	-70 °C	300 °C	The B-777 Ultratemp label for harsh washing processes works seamlessly with the BSP™61 Print and Apply System, the ALF Label Feeder and other auto-apply systems. Together they provide a reliable and flexible on-site traceability solution for high heat applications in manufacturing.	UL Recognised to UL969 Labelling and Marking Standard when printed with Brady Series R6300 ribbon. See UL file MH25991 for specific details.
B-8423	Polyester	Satin	White	-70 °C	110 °C	Polyester material with satin finish, economical alternative to B-423. Used for component identification, barcoding, asset and inventory tracking. Also available in yellow.	–
B-854	Metal Detectable Polyester	Matt	White	-40 °C	110 °C	Tough against harsh washdown environments; metal detectable. Also available in yellow.	–
B-855	Polyester	Matt	White	-40 °C	110 °C	Tough against harsh washdown environments. Also available in yellow.	–
B-8591	Polymer	Gloss	White	-70 °C	110 °C	B-8591 toughest outdoor label is suited for smooth, textured/rough or highly textured/low energy surfaces.	–




# PRODUCT AND GENERAL PURPOSE IDENTIFICATION



## Polyester labels (continued)

For general purpose industrial identification applications

Diagram	Order Reference	Colour	Label Width A (mm)	Label Height B (mm)	Label Length B (m)	Vertical Repeat D (mm)	Labels per Roll	Printer Ribbon Series
<b>B-423/B-966B: Polyester with Polyester Overlaminatate</b>								
	B33-22-423	White	31.75	19.05	-	28.58	2000	B30-R6000
	B33-23-423	White	50.80	25.40	-	34.93	800	B30-R6000
	B33-24-423	White	69.85	44.45	-	53.98	500	B30-R6000
<b>B-430: Polyester</b>								
	B33-5-430	Transparent	25.40	12.70	-	15.24	5000	B30-R6000
	B33-17-430	Transparent	50.80	25.40	-	28.58	1500	B30-R6000
	B33-18-430	Transparent	76.20	25.40	-	28.58	1500	B30-R6000
	B33C-3000-430	Transparent	76.20	-	30.48	-	1	B30-R6000
<b>B-432: Polyester</b>								
	B33-149-432	Transparent	12.70	12.70	-	15.24	5000	B30-R6000
	B33-17-432	Transparent	50.80	25.40	-	28.58	1500	B30-R6000
	B33-18-432	Transparent	76.20	25.40	-	28.58	1500	B30-R6000
	B33-19-432	Transparent	76.20	50.80	-	53.98	500	B30-R6000
	B30C-4000-432	Transparent	101.60	-	36.58	-	1	B30-R6000
<b>B-483A: Polyester</b>								
	B33-149-483	White	12.70	12.70	-	15.24	5000	B30-R6000
	B33-5-483	White	25.40	12.70	-	15.24	5000	B30-R6000
	B33-17-483	White	50.80	25.40	-	28.58	1500	B30-R6000
	B33-7-483	White	69.85	31.75	-	34.93	1000	B30-R6000
	B33-19-483	White	76.20	50.80	-	53.98	500	B30-R6000
	B33-18-483	White	76.20	25.40	-	28.58	1500	B30-R6000
	B33-55-483	White	101.60	50.80	-	53.98	750	B30-R6000
	B33-76-483	White	101.60	76.20	-	79.38	500	B30-R6000
	B30C-4000-483	White	101.60	-	39.62	-	1	B30-R6000
<b>B-484A: Polyester</b>								
	B33-125-484	White	22.86	12.70	-	15.24	1500	B30-R6000
	B33-5-484	White	25.40	12.70	-	15.24	5000	B30-R6000
	B33-136-484	White	38.10	19.05	-	22.23	1500	B30-R6000
	B33-17-484	White	50.80	25.40	-	28.58	1500	B30-R6000
	B33-18-484	White	76.20	25.40	-	28.58	1500	B30-R6000
	B33-19-484	White	76.20	50.80	-	53.98	500	B30-R6000
	B30C-4000-484	White	101.60	-	45.72	-	1	B30-R6000
<b>B-488: Polyester</b>								
	B30C-4000-488	White	101.60	-	39.62	-	1	B30-R4300
<b>B-489A: Polyester</b>								
	B33-5-489	White	25.40	12.70	-	15.24	5000	B30-R4300
	B33-17-489	White	50.80	25.40	-	28.58	1500	B30-R4300
	B33-19-489	White	76.20	50.80	-	53.98	500	B30-R4300
	B33-18-489	White	76.20	25.40	-	28.58	1500	B30-R4300
	B30C-4000-489	White	101.60	-	39.62	-	1	B30-R4300

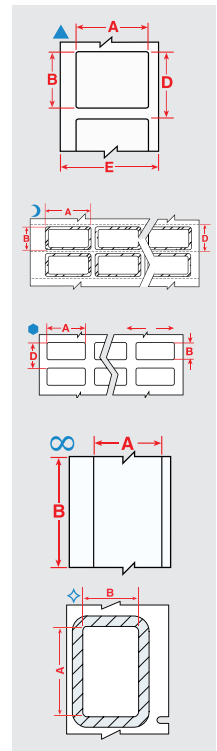

>>


# PRODUCT AND GENERAL PURPOSE IDENTIFICATION



## Polyester labels (continued)

For general purpose industrial identification applications

Diagram	Order Reference	Colour	Label Width A (mm)	Label Height B (mm)	Label Length B (m)	Vertical Repeat D (mm)	Labels per Roll	Printer Ribbon Series
<b>B-618: Polyester</b>								
●	B33-12-618	White	12.70	11.10	-	13.67	10000	B30-R6000
●	B33-5-618	White	25.40	12.70	-	15.24	7000	B30-R6000
●	B33-37-618	White	38.10	12.70	-	15.24	5000	B30-R6000
●	B33-6-618	White	38.10	19.05	-	22.23	3300	B30-R6000
▲	B33-53-618	White	50.80	12.70	-	15.24	2500	B30-R6000
▲	B33-17-618	White	50.80	25.40	-	28.58	1500	B30-R6000
▲	B33-7-618	White	69.85	31.75	-	34.93	1000	B30-R6000
▲	B33-18-618	White	76.20	25.40	-	28.58	1500	B30-R6000
▲	B33-19-618	White	76.20	50.80	-	53.98	700	B30-R6000
▲	B33-55-618	White	101.60	50.80	-	53.98	750	B30-R6000
▲	B33-76-618	White	101.60	76.20	-	79.38	500	B30-R6000
<b>B-8423: Polyester</b>								
●	B33-12-8423	White	12.70	11.10	-	14.13	2500	B30-R6000
●	B33-101-8423	White	19.05	6.35	-	9.40	2500	B30-R6000
●	B33-G2-8423YL	Yellow	20.00	7.95	-	15.00	5000	B30-R6000
●	B33-13-8423	White	31.75	6.35	-	9.35	2500	B30-R6000
●	B33-104-8423	White	38.10	6.35	-	9.33	2500	B30-R6000
●	B33-600-8423	White	38.10	19.05	-	22.05	2500	B30-R6000
<b>B-8591: Polyester</b>								
●	B33-37-8591-BK	Black	38.10	12.70	-	15.24	4000	B30-R4400-WT
●	B33-37-8591-SL	Silver	38.10	12.70	-	15.24	4000	B30-R6600
●	B33-37-8591-WT	White	38.10	12.70	-	15.24	4000	B30-R6600
●	B33-37-8591-YL	Yellow	38.10	12.70	-	15.24	4000	B30-R6600
▲	B33-53-8591-BK	Black	50.80	12.70	-	15.24	2500	B30-R4400-WT
▲	B33-53-8591-SL	Silver	50.80	12.70	-	15.24	2500	B30-R6600
▲	B33-53-8591-WT	White	50.80	12.70	-	15.24	2500	B30-R6600
▲	B33-53-8591-YL	Yellow	50.80	12.70	-	15.24	2500	B30-R6600
▲	B33-7-8591-BK	Black	69.85	31.75	-	34.93	1000	B30-R4400-WT
▲	B33-7-8591-SL	Silver	69.85	31.75	-	34.93	1000	B30-R6600
▲	B33-7-8591-WT	White	69.85	31.75	-	34.93	1000	B30-R6600
▲	B33-7-8591-YL	Yellow	69.85	31.75	-	34.93	1000	B30-R6600
▲	B33-76-8591-BK	Black	101.60	76.20	-	79.38	400	B30-R4400-WT
▲	B33-76-8591-SL	Silver	101.60	76.20	-	79.38	400	B30-R6600
▲	B33-76-8591-WT	White	101.60	76.20	-	79.38	400	B30-R6600
▲	B33-76-8591-YL	Yellow	101.60	76.20	-	79.38	400	B30-R6600
∞	B33C-2000-8591-BK	Black	50.80	-	30.48	-	1	B30-R4400-WT
∞	B33C-2000-8591-SL	Silver	50.80	-	30.48	-	1	B30-R6600
∞	B33C-2000-8591-WT	White	50.80	-	30.48	-	1	B30-R6600
∞	B33C-2000-8591-YL	Yellow	50.80	-	30.48	-	1	B30-R6600
∞	B33C-3000-8591-BK	Black	76.20	-	30.48	-	1	B30-R4400-WT
∞	B33C-3000-8591-SL	Silver	76.20	-	30.48	-	1	B30-R6600
∞	B33C-3000-8591-WT	White	76.20	-	30.48	-	1	B30-R6600
∞	B33C-3000-8591-YL	Yellow	76.20	-	30.48	-	1	B30-R6600
∞	B33C-4000-8591-BK	Black	101.60	-	30.48	-	1	B30-R4400-WT
∞	B33C-4000-8591-SL	Silver	101.60	-	30.48	-	1	B30-R6600
∞	B33C-4000-8591-WT	White	101.60	-	30.48	-	1	B30-R6600
∞	B33C-4000-8591-YL	Yellow	101.60	-	30.48	-	1	B30-R6600

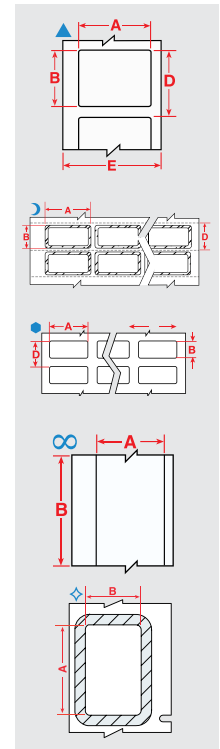

# PRODUCT AND GENERAL PURPOSE IDENTIFICATION


## Metallised polyester labels

For product labelling, asset tracking and general industrial identification

- Silver metallic label withstands solvents and variable temperatures
- Ideal for serial number plates and rating plates with nameplate quality and metal looking finish



Diagram	Order Reference	Colour	Label Width A (mm)	Label Height B (mm)	Label Length B (m)	Vertical Repeat D (mm)	Labels per Roll	Printer Ribbon Series
<b>B-413: Metallic, Non-metal Polyester</b>								
●	B33-5-413	Silver	25.40	12.70	-	15.24	7000	B30-R6000
●	B33-37-413	Silver	38.10	12.70	-	15.24	5000	B30-R6000
●	B33-6-413	Silver	38.10	19.05	-	22.23	3300	B30-R6000
▲	B33-17-413	Silver	50.80	25.40	-	28.58	1500	B30-R6000
▲	B33-53-413	Silver	50.80	12.70	-	15.24	2500	B30-R6000
▲	B33-7-413	Silver	69.85	31.75	-	34.93	1000	B30-R6000
▲	B33-18-413	Silver	76.20	25.40	-	28.58	1500	B30-R6000
▲	B33-19-413	Silver	76.20	50.80	-	53.98	700	B30-R6000
▲	B33-55-413	Silver	101.60	50.80	-	53.98	750	B30-R6000
∞	B33C-2000-413	Silver	50.80	-	30.48	-	1	B30-R6000
∞	B33C-3000-413	Silver	76.20	-	30.48	-	1	B30-R6000
∞	B33C-4000-413	Silver	101.60	-	30.48	-	1	B30-R6000
<b>B-428: Metallised Polyester</b>								
●	B33-616-428	Light Grey	22.86	19.05	-	22.05	3000	B30-R4300
●	B33-5-428	Light Grey	25.40	12.70	-	15.24	5000	B30-R4300
●	B33-37-428	Light Grey	38.10	12.70	-	15.24	4000	B30-R4300
●	B33-6-428	Light Grey	38.10	19.05	-	22.23	3000	B30-R4300
▲	B33-53-428	Light Grey	50.80	12.70	-	15.24	2500	B30-R4300
▲	B33-17-428	Light Grey	50.80	25.40	-	28.58	1500	B30-R4300
▲	B33-7-428	Light Grey	69.85	31.75	-	34.93	1000	B30-R4300
▲	B33-19-428	Light Grey	76.20	50.80	-	53.98	500	B30-R4300
▲	B33-18-428	Light Grey	76.20	25.40	-	28.58	1500	B30-R4300
▲	B33-55-428	Light Grey	101.60	50.80	-	53.98	500	B30-R4300
▲	B33-161-428	Light Grey	101.60	101.60	-	104.78	300	B30-R4300
∞	B30C-2000-428	Light Grey	50.80	-	30.48	-	1	B30-R4300
∞	B30C-4000-428	Light Grey	101.60	-	39.62	-	1	B30-R4300
<b>B-428/B-966B: Metallised Polyester with Polyester Overlaminat</b>								
☾	B33-22-428	Light Grey	31.75	19.05	-	28.58	1700	B30-R4300
◇	B33-23-428	Light Grey	50.80	25.40	-	34.93	700	B30-R4300
◇	B33-24-428	Light Grey	69.85	44.45	-	53.98	450	B30-R4300
<b>B-434A: Metallised Polyester</b>								
●	B33-5-434	Silver	25.40	12.70	-	15.24	5000	B30-R6000
▲	B33-136-434	Silver	38.10	19.05	-	22.23	1500	B30-R6000
●	B33-37-434	Silver	38.10	12.70	-	15.24	5000	B30-R6000
●	B33-6-434	Silver	38.10	19.05	-	22.23	3300	B30-R6000
▲	B33-17-434	Silver	50.80	25.40	-	28.58	1500	B30-R6000
▲	B33-53-434	Silver	50.80	12.70	-	15.24	2500	B30-R6000
▲	B33-7-434	Silver	69.85	31.75	-	34.93	1000	B30-R6000
▲	B33-18-434	Silver	76.20	25.40	-	28.58	1500	B30-R6000
▲	B33-19-434	Silver	76.20	50.80	-	53.98	500	B30-R6000
▲	B33-55-434	Silver	101.60	50.80	-	53.98	750	B30-R6000
▲	B33-161-434	Silver	101.60	101.60	-	104.78	350	B30-R6000
∞	B30C-2000-434	Silver	50.80	-	30.48	-	1	B30-R6000
∞	B30C-3000-434	Silver	76.20	-	30.48	-	1	B30-R6000
∞	B30C-4000-434	Silver	101.60	-	39.62	-	1	B30-R6000
<b>B-435A: Metallised Polyester</b>								
●	B33-5-435	Silver	25.40	12.70	-	15.24	7000	B30-R6000
●	B33-37-435	Silver	38.10	12.70	-	15.24	5000	B30-R6000
●	B33-6-435	Silver	38.10	19.05	-	22.23	3300	B30-R6000
▲	B33-53-435	Silver	50.80	12.70	-	15.24	2500	B30-R6000
●	B33-17-435	Silver	50.80	25.40	-	28.58	1500	B30-R6000
▲	B33-7-435	Silver	69.85	31.75	-	34.93	1000	B30-R6000
▲	B33-18-435	Silver	76.20	25.40	-	28.58	1500	B30-R6000

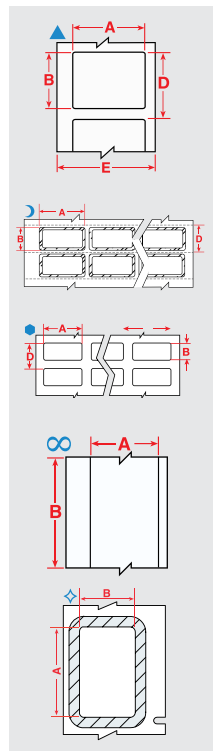

>>


# PRODUCT AND GENERAL PURPOSE IDENTIFICATION

## Metallised polyester labels (Continued)

For product labelling, asset tracking and general industrial identification



Diagram	Order Reference	Colour	Label Width A (mm)	Label Height B (mm)	Label Length B (m)	Vertical Repeat D (mm)	Labels per Roll	Printer Ribbon Series
▲	B33-19-435	Silver	76.20	50.80	-	53.98	500	B30-R6000
▲	B33-55-435	Silver	101.60	50.80	-	53.98	750	B30-R6000
◆	B33-161-435	Silver	101.60	101.60	-	104.78	350	B30-R6000
∞	B33C-2000-435	Silver	50.80	-	30.48	-	1	B30-R6000
∞	B33C-3000-435	Silver	76.20	-	30.48	-	1	B30-R6000
<b>B-438: Tamper-evident Metallised Polyester</b>								
◆	B33-5-438	Silver	25.40	12.70	-	15.24	7000	B30-R4300
◆	B33-37-438	Silver	38.10	12.70	-	15.24	5000	B30-R4300
◆	B33-6-438	Silver	38.10	19.05	-	22.23	3300	B30-R4300
▲	B30-17-438	Silver	50.80	25.40	-	28.58	1225	B30-R4300
▲	B33-53-438	Silver	50.80	12.70	-	15.24	2500	B30-R4300
▲	B33-7-438	Silver	69.85	31.75	-	34.93	1000	B30-R4300
▲	B30-18-438	Silver	76.20	25.40	-	31.75	1225	B30-R4300
▲	B30-222-438	Silver	76.20	50.80	-	57.15	650	B30-R4300
▲	B33-55-438	Silver	101.60	50.80	-	53.98	750	B30-R4300
▲	B33-76-438	Silver	101.60	76.20	-	79.38	500	B30-R4300
∞	B30C-3000-438	Silver	76.20	-	30.48	-	1	B30-R4300
<b>B-480A: Metallic, Non-metal Polyester</b>								
∞	B30C-4000-480	Light Grey	101.60	-	35.05	-	1	B30-R6000
<b>B-486B: Metallised Polyester</b>								
▲	B33-59-486	Light Grey	25.40	12.70	-	15.24	2500	B30-R4300
▲	B33-53-486	Light Grey	50.80	12.70	-	15.24	2500	B30-R4300
▲	B33-17-486	Light Grey	50.80	25.40	-	28.58	1300	B30-R4300
▲	B33-7-486	Light Grey	69.85	31.75	-	34.93	1000	B30-R4300
▲	B33-19-486	Light Grey	76.20	50.80	-	53.98	500	B30-R4300
▲	B33-18-486	Light Grey	76.20	25.40	-	28.58	1300	B30-R4300
▲	B33-161-486	Light Grey	101.60	101.60	-	104.78	250	B30-R4300
∞	B30C-4000-486	Light Grey	101.60	-	35.05	-	1	B30-R4300
<b>B-565: Metallised Polyester</b>								
∞	B30C-1125-565-SL	Silver	28.58	-	30.48	-	1	B30-R10000
∞	B30C-2250-565-SL	Silver	57.15	-	30.48	-	1	B30-R10000
∞	B30C-4000-565-SL	Silver	101.60	-	30.48	-	1	B30-R10000
<b>B-7563: Metallised Polyester</b>								
◆	B33-600-7563	Silver	38.10	19.05	-	22.05	2500	B30-R6000
◆	B30-135-7563	Silver	38.10	19.05	-	22.22	3154	B30-R6000
▲	B30-17-7563	Silver	50.80	25.40	-	28.58	1226	B30-R6000
▲	B30-7-7563	Silver	69.85	31.75	-	34.93	1003	B30-R6000
▲	B30-222-7563	Silver	76.20	50.80	-	57.15	649	B30-R6000



## B-424 Paper labels

Economical choice for light duty general identification

- White finish and matt topcoat
- Excellent contrast and smear resistance for barcode printing




Diagram	Order Reference	Colour	Label Width A (mm)	Label Height B (mm)	Label Length B (m)	Vertical Repeat D (mm)	Labels per Roll	Printer Ribbon Series
<b>B-424: Paper</b>								
▲	B33-53-424	White	50.80	12.70	-	15.24	2500	B30-R4300
▲	B33-17-424	White	50.80	25.40	-	28.58	1500	B30-R4300
▲	B33-7-424	White	69.85	31.75	-	34.93	1000	B30-R4300
▲	B33-20-424	White	76.20	127.00	-	130.18	250	B30-R4300
▲	B33-19-424	White	76.20	50.80	-	53.98	500	B30-R4300
▲	B33-18-424	White	76.20	25.40	-	28.58	1500	B30-R4300
▲	B33-55-424	White	101.60	50.80	-	53.98	750	B30-R4300
▲	B33-25-424	White	101.60	152.40	-	155.58	350	B30-R4300
∞	B30C-4000-424	White	101.60	-	45.72	-	1	B30-R4300


# PRODUCT AND GENERAL PURPOSE IDENTIFICATION

## B-425 Polypropylene labels

General labelling material for indoor use

- Outstanding chemical and solvent resistance and print performance
- Not recommended for prolonged outdoor use (use B-595 indoor/outdoor vinyl for 8-10 year outdoor use)

Diagram	Order Reference	Colour	Label Width A (mm)	Label Height B (mm)	Vertical Repeat D (mm)	Labels per Roll	Printer Ribbon Series
B-425A: Polypropylene							
◆	B33-5-425	White	25.40	12.70	15.24	5000	B30-R4300
▲	B33-17-425	White	50.80	25.40	28.58	1500	B30-R4300
▲	B33-18-425	White	76.20	25.40	28.58	1500	B30-R4300
▲	B33-19-425	White	76.20	50.80	53.98	500	B30-R4300




## B-439 General identification vinyl labels

High Adhesion

- Designed for use in ambient conditions with limited solvent exposure
- Indoor/outdoor vinyl film has an acrylic pressure sensitive adhesive
- Service temperature of -70 to 40° C
- Available in many different colours as a custom option

Diagram	Order Reference	Colour	Label Width A (mm)	Label Height B (mm)	Vertical Repeat D (mm)	Labels per Roll	Printer Ribbon Series
B-439: Vinyl							
◆	B33-5-439	White	25.40	12.70	15.24	7000	B30-R6000
◆	B33-37-439	White	38.10	12.70	15.24	5000	B30-R6000
▲	B33-17-439	White	50.80	25.40	28.58	1000	B30-R6000
▲	B33-53-439	White	50.80	12.70	15.24	2500	B30-R6000
▲	B33-18-439	White	76.20	25.40	28.58	1000	B30-R6000
▲	B33-19-439	White	76.20	50.80	53.98	700	B30-R6000
▲	B33-55-439	White	101.60	50.80	53.98	700	B30-R6000
▲	B33-76-439	White	101.60	76.20	79.38	500	B30-R6000




## B-595 Outdoor grade vinyl labels

For 8-10 year outdoor use

- Semi-gloss finish
- Good chemical, moisture, UV and weather resistance
- Highly pliable material conforms to rough and curved surfaces and equipment
- Average outdoor durability of the label is 8-10 years depending on the placement

Diagram	Order Reference	Colour	Label Width A (mm)	Label Height B (mm)	Vertical Repeat D (mm)	Labels per Roll	Printer Ribbon Series
B-595: Vinyl							
▲	B30-242-595-BLNKWT	White	28.58	72.39	82.55	300	B30-R10000
▲	B30-219-595-BLNKWT	White	57.15	97.79	107.95	250	B30-R10000
▲	B30-241-595-BLNKYL	Yellow	57.15	76.20	82.55	300	B30-R10000
▲	B30-241-595-BLNKWT	White	76.20	57.15	82.55	300	B30-R10000
▲	B30-25-595-BLNKYL	Yellow	101.60	152.40	158.75	175	B30-R10000
▲	B30-25-595-BLNKWT	White	152.40	101.60	158.75	175	B30-R10000



▶ Average expected outdoor life of product will depend on user definition of failure, climatic conditions, mounting techniques and material colour. The up to 8 to 10 year outdoor durability applies to the vinyl label stock only; ribbon durability will vary. A polyester overlamine is recommended for harsh environments - long term exposure to wind and rain.

# ELECTRONICS IDENTIFICATION



## B-8423 Polyester labels

For circuit board and component identification

- SMT - Top/Bottom; Through Hole - Bottom; Through Hole - Top




Diagram	Order Reference	Colour	Label Width A (mm)	Label Height B (mm)	Vertical Repeat D (mm)	Labels per Roll	Printer Ribbon Series
B-8423: Polyester							
⬢	B33-12-8423	White	12.70	11.10	14.13	2500	B30-R6000
⬢	B33-101-8423	White	19.05	6.35	9.40	2500	B30-R6000
⬢	B33-G2-8423YL	Yellow	20.00	7.95	15.00	5000	B30-R6000
⬢	B33-13-8423	White	31.75	6.35	9.35	2500	B30-R6000
⬢	B33-104-8423	White	38.10	6.35	9.33	2500	B30-R6000



## B-719, B-767 and B-768 Static dissipative polyimide labels

For printed circuit board and electronic component identification

- Static dissipative adhesive and release liner with surface resistivity values
- Complies with EIA-541 Packaging Material Standards for ESD sensitive items
- Withstands the various processes, fluxes and cleaning solvents encountered in the manufacture of PC Boards
- For use on top or bottom-sided component identification or board identification





Diagram	Order Reference	Colour	Label Width A (mm)	Label Height B (mm)	Vertical Repeat D (mm)	Labels per Roll	Printer Ribbon Series
B-719: Polyimide							
⬢	B33-70-719	White	6.35	6.35	8.89	20000	B30-R6000
⬢	B33-340-719	White	9.53	9.53	12.07	10000	B30-R6000
⬢	B33-12-719	White	12.70	11.10	13.64	10000	B30-R6000
⬢	B33-341-719	White	16.51	5.08	8.26	10000	B30-R6000
▲	B33-46-719	White	19.05	6.35	8.89	5000	B30-R6000
⬢	B33-1-719	White	19.05	6.35	8.89	10000	B30-R6000
⬢	B33-51-719	White	25.40	6.35	8.89	10000	B30-R6000
▲	B33-103-719	White	25.40	6.35	8.89	4000	B30-R6000
⬢	B33-5-719	White	25.40	12.70	15.24	7000	B30-R6000
▲	B33-43-719	White	31.75	6.35	8.89	5000	B30-R6000
⬢	B33-13-719	White	31.75	6.35	9.53	7000	B30-R6000
⬢	B33-4-719	White	38.10	6.35	8.89	8000	B30-R6000
B-767: Static Dissipative Polyimide							
⬢	B33-70-767	White	6.35	6.35	8.89	20000	B30-R6300
⬢	B33-340-767	White	9.53	9.53	12.07	10000	B30-R6300
⬢	B33-12-767	White	12.70	11.10	13.64	10000	B30-R6300
⬢	B33-341-767	White	16.51	5.08	8.26	10000	B30-R6300
⬢	B33-1-767	White	19.05	6.35	8.89	10000	B30-R6300
▲	B33-46-767	White	19.05	6.35	8.89	5000	B30-R6300
⬢	B33-2-767	White	22.86	6.35	8.89	10000	B30-R6300
⬢	B33-51-767	White	25.40	6.35	8.89	10000	B30-R6300
▲	B33-103-767	White	25.40	6.35	8.89	5000	B30-R6300
⬢	B33-13-767	White	31.75	6.35	9.53	7000	B30-R6300
▲	B33-43-767	White	31.75	6.35	8.89	5000	B30-R6300
▲	B33-45-767	White	38.10	6.35	8.89	5000	B30-R6300
⬢	B33-4-767	White	38.10	6.35	8.89	8000	B30-R6300
B-768: Static Dissipative Polyimide							
⬢	B33-11-768	White	6.35	6.35	9.53	15000	B30-R6300
⬢	B33-340-768	White	9.53	9.53	12.07	10000	B30-R6300
⬢	B33-12-768	White	12.70	11.10	13.64	10000	B30-R6300

>>

## B-719, B-767 and B-768 Static dissipative polyimide labels (Continued)

For printed circuit board and electronic component identification

Diagram	Order Reference	Colour	Label Width A (mm)	Label Height B (mm)	Vertical Repeat D (mm)	Labels per Roll	Printer Ribbon Series
◆	B33-341-768	White	16.51	5.08	8.26	10000	B30-R6300
◆	B33-1-768	White	19.05	6.35	8.89	5000	B30-R6300
▲	B33-46-768	White	19.05	6.35	8.89	5000	B30-R6300
◆	B33-2-768	White	22.86	6.35	8.89	10000	B30-R6300
▲	B33-49-768	White	22.86	6.35	8.89	5000	B30-R6300
◆	B33-51-768	White	25.40	6.35	8.89	10000	B30-R6300
▲	B33-103-768	White	25.40	6.35	8.89	4000	B30-R6300
◆	B33-3-768	White	25.40	9.53	12.07	10000	B30-R6300
◆	B33-5-768	White	25.40	12.70	15.24	10000	B30-R6300
◆	B33-13-768	White	31.75	6.35	9.53	7000	B30-R6300
◆	B33-4-768	White	38.10	6.35	8.89	8000	B30-R6300
▲	B33-45-768	White	38.10	6.35	8.89	5000	B30-R6300
▲	B33-72-768	White	44.45	6.35	8.89	5000	B30-R6300
▲	B33-15-768	White	50.80	6.35	9.53	3200	B30-R6300




## B-724, B-777 and B-797 Standard polyimide labels

For circuit board labels and high-temperature general identification applications

- Withstands the various processes, fluxes and cleaning solvents encountered in the manufacture of printed circuit boards
- For use on top bottom-side component identification or board identification
- 2 temperature levels to meet your needs



Diagram	Order Reference	Colour	Label Width A (mm)	Label Height B (mm)	Label Length B (m)	Vertical Repeat D (mm)	Labels per Roll	Printer Ribbon Series
<b>B-483A: Polyester</b>								
▲	M7-16-483	White	25.40	9.53	-	12.70	500	M7-R6000
<b>B-724: Polyimide</b>								
◆	B33-340-724	Amber	9.53	9.53	-	12.07	10000	B30-R4300
▲	B33-344-724	Amber	12.70	5.08	-	8.26	3700	B30-R4300
◆	B33-12-724	Amber	12.70	11.10	-	13.64	10000	B30-R4300
◆	B33-341-724	Amber	16.51	5.08	-	8.26	10000	B30-R4300
▲	B33-342-724	Amber	16.51	5.08	-	8.26	3700	B30-R4300
◆	B33-1-724	Amber	19.05	6.35	-	8.89	5000	B30-R4300
▲	B33-46-724	Amber	19.05	6.35	-	8.89	5000	B30-R4300
◆	B33-2-724	Amber	22.86	6.35	-	8.89	5000	B30-R4300
◆	B33-51-724	Amber	25.40	6.35	-	8.89	10000	B30-R4300
▲	B33-103-724	Amber	25.40	6.35	-	8.89	4000	B30-R4300
◆	B33-5-724	Amber	25.40	12.70	-	15.24	7000	B30-R4300
◆	B33-13-724	Amber	31.75	6.35	-	9.53	7000	B30-R4300
◆	B33-4-724	Amber	38.10	6.35	-	8.89	5000	B30-R4300
∞	B30C-4000-724	Amber	101.60	-	39.62	-	1	B30-R4300
<b>B-728: Polyimide</b>								
◆	B33-70-728	White	6.35	6.35	-	8.89	20000	B30-R6000
◆	B33-340-728	White	9.53	9.53	-	12.07	10000	B30-R6000
◆	B33-12-728	White	12.70	11.10	-	13.64	10000	B30-R6000
◆	B33-341-728	White	16.51	5.08	-	8.26	10000	B30-R6000
◆	B33-1-728	White	19.05	6.35	-	8.89	10000	B30-R6000
◆	B33-2-728	White	22.86	6.35	-	8.89	10000	B30-R6000
◆	B33-5-728	White	25.40	12.70	-	15.24	7000	B30-R6000

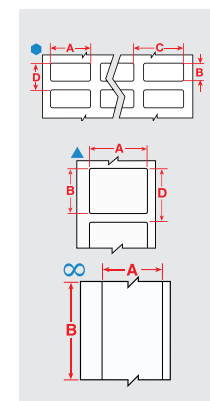

>>

# ELECTRONICS IDENTIFICATION



## B-724, B-777 and B-797 Standard polyimide labels (Continued)

For circuit board labels and high-temperature general identification applications

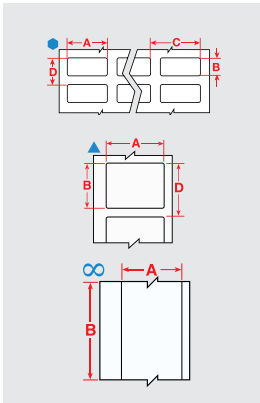


Diagram	Order Reference	Colour	Label Width A (mm)	Label Height B (mm)	Label Length B (m)	Vertical Repeat D (mm)	Labels per Roll	Printer Ribbon Series
●	B33-51-728	White	25.40	6.35	-	8.89	10000	B30-R6000
▲	B33-103-728	White	25.40	6.35	-	8.89	4000	B30-R6000
●	B33-13-728	White	31.75	6.35	-	9.53	7000	B30-R6000
▲	B33-43-728	White	31.75	6.35	-	8.89	4000	B30-R6000
●	B33-4-728	White	38.10	6.35	-	8.89	8000	B30-R6000
<b>B-729: Polyimide</b>								
●	B33-70-729	White	6.35	6.35	-	8.89	20000	B30-R6000
●	B33-340-729	White	9.53	9.53	-	12.07	10000	B30-R6000
●	B33-12-729	White	12.70	11.10	-	13.64	10000	B30-R6000
●	B33-341-729	White	16.51	5.08	-	8.26	10000	B30-R6000
●	B33-1-729	White	19.05	6.35	-	8.89	10000	B30-R6000
●	B33-2-729	White	22.86	6.35	-	8.89	10000	B30-R6000
●	B33-5-729	White	25.40	12.70	-	15.24	7000	B30-R6000
●	B33-51-729	White	25.40	6.35	-	8.89	10000	B30-R6000
▲	B33-103-729	White	25.40	6.35	-	8.89	4000	B30-R6000
●	B33-13-729	White	31.75	6.35	-	9.53	7000	B30-R6000
▲	B33-43-729	White	31.75	6.35	-	8.89	4000	B30-R6000
●	B33-4-729	White	38.10	6.35	-	8.89	8000	B30-R6000
<b>B-777: Polyimide</b>								
●	B33-340-777	White	9.53	9.53	-	12.07	10000	B30-R6300
●	B33-341-777	White	16.51	5.08	-	8.26	10000	B30-R6300
●	B33-1-777	White	19.05	6.35	-	8.89	10000	B30-R6300
●	B33-2-777	White	22.86	6.35	-	8.89	10000	B30-R6300
●	B33-51-777	White	25.40	6.35	-	8.89	10000	B30-R6300
▲	B33-103-777	White	25.40	6.35	-	8.89	4000	B30-R6300
●	B33-13-777	White	31.75	6.35	-	9.53	7000	B30-R6300
▲	B33-43-777	White	31.75	6.35	-	8.89	4000	B30-R6300
●	B33-4-777	White	38.10	6.35	-	8.89	8000	B30-R6300
<b>B-797: Polyimide</b>								
●	B33-70-797	White	6.35	6.35	-	8.89	20000	B30-R6300
●	B33-11-797	White	6.35	6.35	-	9.53	5000	B30-R6300
●	B33-71-797	White	8.00	8.00	-	11.43	20000	B30-R6300
●	B33-340-797	White	9.53	9.53	-	12.07	10000	B30-R6300
●	B33-12-797	White	12.70	11.10	-	13.64	10000	B30-R6300
●	B33-341-797	White	16.51	5.08	-	8.26	10000	B30-R6300
▲	B33-342-797	White	16.51	5.08	-	8.26	3700	B30-R6300
●	B33-1-797	White	19.05	6.35	-	8.89	5000	B30-R6300
▲	B33-49-797	White	22.86	6.35	-	8.89	5000	B30-R6300
●	B33-51-797	White	25.40	6.35	-	8.89	10000	B30-R6300
●	B33-3-797	White	25.40	9.53	-	12.07	10000	B30-R6300
●	B33-5-797	White	25.40	12.70	-	15.24	7000	B30-R6300
▲	B33-103-797	White	25.40	6.35	-	8.89	5000	B30-R6300
▲	B33-58-797	White	25.40	9.53	-	12.07	4000	B30-R6300
▲	B33-59-797	White	25.40	12.70	-	15.24	2500	B30-R6300
●	B33-13-797	White	31.75	6.35	-	9.53	5000	B30-R6300
▲	B33-43-797	White	31.75	6.35	-	8.89	5000	B30-R6300
▲	B33-44-797	White	34.93	6.35	-	8.89	5000	B30-R6300
▲	B33-45-797	White	38.10	6.35	-	8.89	5000	B30-R6300
●	B33-4-797	White	38.10	6.35	-	8.89	10000	B30-R6300
▲	B33-72-797	White	44.45	6.35	-	8.89	5000	B30-R6300
▲	B33-15-797	White	50.80	6.35	-	9.53	3200	B30-R6300
∞	B30C-4000-797	White	101.60	-	39.62	-	1	B30-R6300


## B-593 Raised profile labels - Push button style

Lower cost than engraved legend plates

- High gloss, polyester label with thick raised profile and ultra-aggressive adhesive (total thickness = 0.65 mm)
- High performance, low cost substitute to engraved plates
- 10 year outdoor durability rating
- On-demand labelling: labels print out in less than 4 seconds
- 5 push button sizes (including keyed with 22.50 and 30.50 mm hole diam and non-keyed with 22.50 mm hole diam)



Diagram	Order Reference	Colour	Label Width A (mm)	Label Height B (mm)	Vertical Repeat D (mm)	Labels per Roll	Printer Ribbon Series
B-593: Polyester							
	B30EP-167-593-BK	Black	30.48	38.10	44.45	200	B30-R4400-WT
	B30EP-167-593-GN	Green	30.48	38.10	44.45	200	B30-R4400-WT
	B30EP-167-593-RD	Red	30.48	38.10	44.45	200	B30-R4400-WT
	B30EP-167-593-WT	White	30.48	38.10	44.45	200	B30-R6000
	B30EP-167-593-YL	Yellow	30.48	38.10	44.45	200	B30-R6000
	B30EP-167U-593-BK	Black	30.48	38.10	44.45	200	B30-R4400-WT
	B30EP-167U-593-GN	Green	30.48	38.10	44.45	200	B30-R4400-WT
	B30EP-167U-593-RD	Red	30.48	38.10 <td 44.45	200	B30-R4400-WT	
	B30EP-167U-593-WT	White	30.48	38.10	44.45	200	B30-R6000
	B30EP-167U-593-YL	Yellow	30.48	38.10	44.45	200	B30-R6000
	B30EP-168-593-BK	Black	30.48	48.26	53.98	180	B30-R4400-WT
	B30EP-168-593-GN	Green	30.48	48.26	53.98	180	B30-R4400-WT
	B30EP-168-593-RD	Red	30.48	48.26	53.98	180	B30-R4400-WT
	B30EP-168-593-WT	White	30.48	48.26	53.98	180	B30-R6000
	B30EP-168-593-YL	Yellow	30.48	48.26	53.98	180	B30-R6000
	B30EP-169-593-BK	Black	45.72	45.72	50.80	190	B30-R4400-WT
	B30EP-169-593-GN	Green	45.72	45.72	50.80	190	B30-R4400-WT
	B30EP-169-593-RD	Red	45.72	45.72	50.80	190	B30-R4400-WT
	B30EP-169-593-WT	White	45.72	45.72	50.80	190	B30-R6000
	B30EP-169-593-YL	Yellow	45.72	45.72	50.80	190	B30-R6000
	B30EP-170-593-BK	Black	60.96	60.96	66.68	145	B30-R4400-WT
	B30EP-170-593-RD	Red	60.96	60.96	66.68	145	B30-R4400-WT
	B30EP-170-593-WT	White	60.96	60.96	66.68	145	B30-R6000
	B30EP-170-593-YL	Yellow	60.96	60.96	66.68	145	B30-R6000

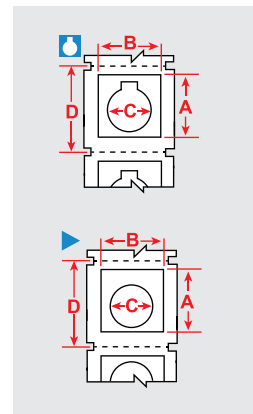


## B-593 Raised profile labels

Lower cost than engraved legend plates

- High gloss, polyester label with thick raised profile and ultra-aggressive adhesive (0.65 mm)
- Ideal for inside-panel backer board labels and front-of-enclosure labelling
- On-demand labelling: labels print out in less than 4 seconds
- No need to abbreviate your text to avoid per character engraving charges
- 10-year outdoor durability rating
- 6 colours, 7 rectangular sizes




Diagram	Order Reference	Colour	Label Width A (mm)	Label Height B (mm)	Vertical Repeat D (mm)	Labels per Roll	Printer Ribbon Series
B-593: Polyester							
	B30EP-171-593-BK	Black	26.92	12.45	19.05	500	B30-R4400-WT
	B30EP-171-593-GN	Green	26.92	12.45	19.05	500	B30-R4400-WT



>>


# ELECTRONICS IDENTIFICATION



## B-593 Raised profile labels (Continued)

Lower cost than engraved legend plates

Diagram	Order Reference	Colour	Label Width A (mm)	Label Height B (mm)	Vertical Repeat D (mm)	Labels per Roll	Printer Ribbon Series
▲	B30EP-171-593-RD	Red	26.92	12.45	19.05	500	B30-R4400-WT
▲	B30EP-171-593-SL	Silver	26.92	12.45	19.05	500	B30-R6000
▲	B30EP-171-593-WT	White	26.92	12.45	19.05	500	B30-R6000
▲	B30EP-171-593-YL	Yellow	26.92	12.45	19.05	500	B30-R6000
▲	B30EP-172-593-BK	Black	44.96	15.00	21.59	450	B30-R4400-WT
▲	B30EP-172-593-GN	Green	44.96	15.00	21.59	450	B30-R4400-WT
▲	B30EP-172-593-RD	Red	44.96	15.00	21.59	450	B30-R4400-WT
▲	B30EP-172-593-SL	Silver	44.96	15.00	21.59	450	B30-R6000
▲	B30EP-172-593-WT	White	44.96	15.00	21.59	450	B30-R6000
▲	B30EP-172-593-YL	Yellow	44.96	15.00	21.59	450	B30-R6000
▲	B30EP-173-593-BK	Black	50.80	25.40	31.75	300	B30-R4400-WT
▲	B30EP-173-593-GN	Green	50.80	25.40	31.75	300	B30-R4400-WT
▲	B30EP-173-593-RD	Red	50.80	25.40	31.75	300	B30-R4400-WT
▲	B30EP-173-593-SL	Silver	50.80	25.40	31.75	300	B30-R6000
▲	B30EP-173-593-WT	White	50.80	25.40	31.75	300	B30-R6000
▲	B30EP-173-593-YL	Yellow	50.80	25.40	31.75	300	B30-R6000
▲	B30EP-174-593-BK	Black	101.60	25.40	28.58	300	B30-R4400-WT
▲	B30EP-174-593-GN	Green	101.60	25.40	28.58	300	B30-R4400-WT
▲	B30EP-174-593-RD	Red	101.60	25.40	28.58	300	B30-R4400-WT
▲	B30EP-174-593-SL	Silver	101.60	25.40	28.58	300	B30-R6000
▲	B30EP-174-593-WT	White	101.60	25.40	28.58	300	B30-R6000
▲	B30EP-174-593-YL	Yellow	101.60	25.40	28.58	300	B30-R6000
▲	B30EP-175-593-BK	Black	76.20	19.05	25.40	375	B30-R4400-WT
▲	B30EP-175-593-GN	Green	76.20	19.05	25.40	375	B30-R4400-WT
▲	B30EP-175-593-WT	White	76.20	19.05	25.40	375	B30-R6000
▲	B30EP-175-593-YL	Yellow	76.20	19.05	25.40	375	B30-R6000
▲	B30EP-176-593-BK	Black	76.20	25.40	31.75	300	B30-R4400-WT
▲	B30EP-176-593-GN	Green	76.20	25.40	31.75	300	B30-R4400-WT
▲	B30EP-176-593-WT	White	76.20	25.40	31.75	300	B30-R6000
▲	B30EP-176-593-YL	Yellow	76.20	25.40	31.75	300	B30-R6000
▲	B30EP-177-593-BK	Black	76.20	63.50	69.85	125	B30-R4400-WT
▲	B30EP-177-593-GN	Green	76.20	63.50	69.85	125	B30-R4400-WT
▲	B30EP-177-593-WT	White	76.20	63.50	69.85	125	B30-R6000
▲	B30EP-177-593-YL	Yellow	76.20	63.50	69.85	125	B30-R6000

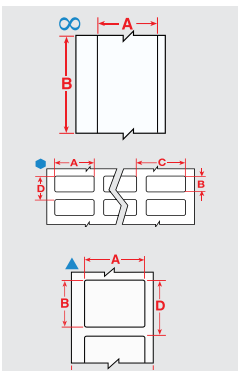

## Inside-panel component labels

For automation & electrical panels and enclosures


- Various sizes in several durable material types
- Ideal for marking backer board, DIN rail, relays, PLCs, switches, solenoids, drive motors and other components
- All recommended materials are flexible and have high-tack adhesives for adhesion to wide variety of surfaces and components

Diagram	Order Reference	Colour	Label Width A (mm)	Label Height B (mm)	Label Length B (m)	Vertical Repeat D (mm)	Labels per Roll	Printer Ribbon Series
B-422: Polyester								
∞	B33C-375-422	White	9.53	-	25.91 m	-	1	B30-R6000
B-483A: Polyester								
●	B33-149-483	White	12.70	12.70	-	15.24	5000	B30-R6000
●	B33-5-483	White	25.40	12.70	-	15.24	5000	B30-R6000
▲	B33-17-483	White	50.80	25.40	-	28.58	1500	B30-R6000
▲	B33-7-483	White	69.85	31.75	-	34.93	1000	B30-R6000
▲	B33-19-483	White	76.20	50.80	-	53.98	500	B30-R6000

## Inside-panel component labels (Continued)

For automation & electrical panels and enclosures

Diagram	Order Reference	Colour	Label Width A (mm)	Label Height B (mm)	Label Length B (m)	Vertical Repeat D (mm)	Labels per Roll	Printer Ribbon Series
▲	B33-18-483	White	76.20	25.40	28.58	1500	B30-R6000	
▲	B33-55-483	White	101.60	50.80	53.98	750	B30-R6000	
<b>B-484A: Polyester</b>								
▲	B33-125-484	White	22.86	12.70	15.24	1500	B30-R6000	
●	B33-5-484	White	25.40	12.70	15.24	5000	B30-R6000	
▲	B33-136-484	White	38.10	19.05	22.23	1500	B30-R6000	
▲	B33-17-484	White	50.80	25.40	28.58	1500	B30-R6000	
▲	B33-18-484	White	76.20	25.40	28.58	1500	B30-R6000	
▲	B33-19-484	White	76.20	50.80	53.98	500	B30-R6000	
▲	B33-55-484	White	101.60	50.80	53.98	750	B30-R6000	
▲	B33-161-484	White	101.60	101.60	104.78	350	B30-R6000	
<b>B-498: Vinyl Cloth</b>								
●	B33-90-498	White	6.35	36.50	39.70	2500	B30-R6200	
●	B33-87-498	White	12.70	36.50	39.70	2500	B30-R6200	
●	B33-68-498	White	12.70	19.05	21.59	5000	B30-R6200	
●	B33-1-498	White	19.05	6.35	8.89	5000	B30-R6200	
▲	B33-254-498	White	19.05	19.05	21.59	1000	B30-R6200	
●	B33-95-498	White	20.32	36.50	39.70	2300	B30-R6200	
●	B33-88-498	White	25.40	19.05	22.23	2500	B30-R6200	
●	B33-5-498	White	25.40	12.70	15.24	5000	B30-R6200	
●	B33-89-498	White	25.40	36.50	39.70	2300	B30-R6200	
●	B33-325-498	White	25.40	63.50	66.68	700	B30-R6200	
●	B33-326-498	White	25.40	101.60	104.78	450	B30-R6200	
●	B33-327-498	White	38.10	101.60	104.78	450	B30-R6200	
●	B33-328-498	White	38.10	152.40	155.58	300	B30-R6200	
<b>B-499: Nylon Cloth</b>								
●	B33-68-499	White	12.70	19.05	21.59	1500	B30-R4300	
●	B33-165-499	White	20.32	36.50	39.70	2500	B30-R4300	
▲	B33-125-499	White	22.86	12.70	15.24	1500	B30-R4300	
●	B33-152-499	White	25.40	9.53	12.07	1500	B30-R4300	
▲	B33-136-499	White	38.10	19.05	22.23	1500	B30-R4300	
▲	B33-151-499	White	50.80	6.35	8.89	1500	B30-R4300	
/	B33-143-499	White	-	-	12.70	1500	B30-R4300	
/	B33-144-499	White	-	-	15.88	1500	B30-R4300	
/	B33-602-499	White	-	-	16.50	3000	B30-R6000	
/	B33-603-499	White	-	-	15.70	3000	B30-R6000	
/	B33-602-499YL	Yellow	-	-	16.50	3000	B30-R6000	
/	B33-603-499YL	Yellow	-	-	15.70	3000	B30-R6000	
<b>B-593: Polyester</b>								
▲	B30EP-171-593-BK	Black	26.92	12.45	19.05	500	B30-R4400-WT	
▲	B30EP-171-593-SL	Silver	26.92	12.45	19.05	500	B30-R6000	
▲	B30EP-171-593-WT	White	26.92	12.45	19.05	500	B30-R6000	
<b>B-595: Vinyl</b>								
∞	B30C-500-595-WT	White	12.70	-	30.48 m	-	1	B30-R10000
∞	B30C-500-595-YL	Yellow	12.70	-	30.48 m	-	1	B30-R10000

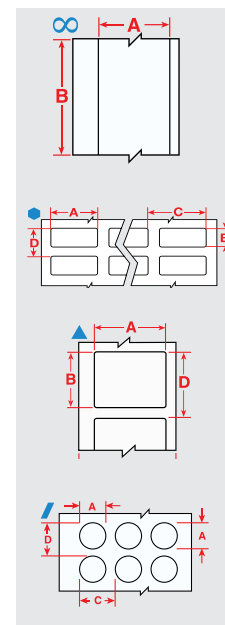

## B-498 Adhesive terminal block markers

Holds strong but can be removed cleanly and re-applied

- Specially designed narrow-width continuous label for alignment on terminal blocks and patch panels
- Highly unique adhesive and cloth construction gives excellent holding power and still allows for clean removal and re-application






Diagram	Order Reference	Colour	Label Width A (mm)	Label Length B (m)	Labels per Roll	Printer Ribbon Series
<b>B-498: Vinyl Cloth</b>						
⊙	B33C-312-498	White	7.92	25.91 m	1	B30-R6200
⊙	B33C-375-498	White	9.53	25.91 m	1	B30-R6200



# WIRE AND CABLE IDENTIFICATION - DATACOM/ELECTRICAL

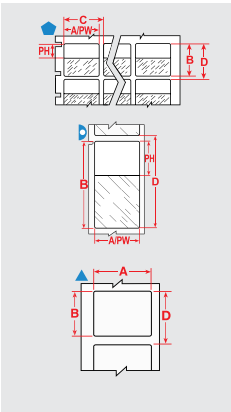


## Self-laminating wire & cable markers

Brady's most popular wire marker

- Features white printable area with clear "tail" that wraps around marker to protect text
- Superior resistance to abrasion, handling, solvents, water, oil and dirt
- B-427 uses a permanent acrylic adhesive designed specifically for tightly curved surfaces
- B-417 offers an extra-strong permanent adhesive acrylic adhesive ideal for small-gauge wires

Diagram	Order Reference	Colour	Label Width A (mm)	Label Height B (mm)	Printable Area Height PH (mm)	Wire Diameter Range (mm)	Vertical Repeat D (mm)	Labels per Roll	Printer Ribbon Series
<b>B-417: Self-laminating Vinyl</b>									
◆	B33-80-417	White	12.70	19.05	9.53	2.54 mm - 3.05 mm	24.13	2500	B30-R4300
◆	B33-114-417	White	12.70	31.75	12.70	3.05 mm - 6.10 mm	34.93	4000	B30-R4300
◆	B33-8-417	White	12.70	36.50	12.70	3.81 mm - 8.38 mm	41.28	5000	B30-R4300
◆	B33-56-417	White	19.05	23.80	9.53	2.29 mm - 4.57 mm	28.58	5000	B30-R4300
◆	B33-73-417	White	19.05	44.45	12.70	5.59 mm - 11.43 mm	47.63	3500	B30-R4300
◆	B33-116-417	White	25.40	25.40	9.53	2.54 mm - 5.08 mm	28.58	2500	B30-R4300
◆	B33-117-417	White	25.40	31.75	12.70	3.05 mm - 6.10 mm	34.93	2000	B30-R4300
◆	B33-9-417	White	25.40	36.50	12.70	3.81 mm - 7.62 mm	41.28	2500	B30-R4300
◆	B33-75-417	White	25.40	57.15	19.05	6.60 mm - 12.45 mm	60.33	1400	B30-R4300
◆	B33-10-417	White	25.40	95.25	25.40	11.18 mm - 22.35 mm	101.60	1200	B30-R4300
◆	B33-81-417	White	25.40	152.40	38.10	18.29 mm - 36.32 mm	157.15	500	B30-R4300
▷	B33-119-417	White	38.10	38.10	12.70	3.81 mm - 8.38 mm	41.28	1000	B30-R4300
▷	B33-27-417	White	50.80	95.25	25.40	11.43 mm - 16.15 mm	101.60	400	B30-R4300
▷	B33-26-417	White	63.50	57.15	19.05	6.10 mm - 12.19 mm	61.93	500	B30-R4300
<b>B-427: Self-laminating Vinyl</b>									
◆	B33-8-427	White	12.70	36.50	12.70	3.81 mm - 7.62 mm	41.30	5000	B30-R4300
◆	B33-80-427	White	12.70	19.05	9.53	2.54 mm - 3.05 mm	24.13	2500	B30-R4300
◆	B33-113-427	White	12.70	25.40	9.53	2.54 mm - 5.08 mm	28.58	2500	B30-R4300
◆	B33-114-427	White	12.70	31.75	12.70	3.81 mm - 6.10 mm	34.93	4000	B30-R4300
◆	B33-73-427	White	19.05	44.45	12.70	5.08 mm - 10.16 mm	47.60	3500	B30-R4300
◆	B33-56-427	White	19.05	23.80	9.53	2.29 mm - 4.57 mm	28.58	5000	B30-R4300
◆	B33-74-427	White	20.32	36.50	12.70	3.81 mm - 7.62 mm	41.30	4000	B30-R4300
◆	B33-115-427	White	25.40	19.05	9.53	2.54 mm - 3.05 mm	21.59	2500	B30-R4300
▷	B33-131-427	White	25.40	66.68	25.40	6.60 mm - 13.21 mm	28.58	1500	B30-R4300
◆	B33-9-427	White	25.40	36.50	12.70	3.81 mm - 7.62 mm	41.30	2500	B30-R4300
◆	B33-81-427	White	25.40	152.40	38.10	18.29 mm - 36.32 mm	157.10	500	B30-R4300
◆	B33-75-427	White	25.40	57.15	19.05	6.10 mm - 12.19 mm	60.30	1400	B30-R4300
◆	B33-10-427	White	25.40	95.25	25.40	11.18 mm - 22.35 mm	101.60	1200	B30-R4300
◆	B33-116-427	White	25.40	25.40	9.53	2.54 mm - 5.08 mm	28.58	2500	B30-R4300
◆	B33-117-427	White	25.40	31.75	12.70	3.05 mm - 6.10 mm	34.93	2000	B30-R4300
◆	B33-211-427	White	25.40	25.40	9.65	2.70 mm - 5.10 mm	32.13	3000	B30-R4300
◆	B33-311-427	White	25.40	31.75	12.70	3.40 mm - 6.10 mm	37.72	3000	B30-R4300
◆	B33-511-427	White	25.40	63.50	19.05	6.70 mm - 14.20 mm	70.64	1500	B30-R4300
▷	B33-272-427	White	38.10	57.15	19.05	6.10 mm - 12.19 mm	63.50	700	B30-R4300
▷	B33-119-427	White	38.10	38.10	12.70	4.06 mm - 8.13 mm	44.45	1000	B30-R4300
▲	B33-135-427AW	White	38.10	19.05	19.05		22.23	1500	B30-R4300
▷	B33-118-427	White	38.10	25.40	9.53	2.54 mm - 5.08 mm	28.58	1250	B30-R4300
◆	B33-517-427	White	38.10	63.50	19.05	6.70 mm - 14.20 mm	69.85	1000	B30-R4300
▷	B33-273-427	White	44.45	57.15	19.05	6.10 mm - 12.19 mm	63.50	500	B30-R4300
▷	B33-121-427	White	44.45	38.10	12.70	4.06 mm - 8.13 mm	44.45	1000	B30-R4300
▷	B33-120-427	White	44.45	25.40	9.53	2.69 mm - 5.11 mm	28.58	1250	B30-R4300
▷	B33-82-427	White	50.80	152.40	38.10	18.29 mm - 36.32 mm	157.15	200	B30-R4300
▲	B33-137-427AW	White	50.80	25.40	25.40		28.58	1500	B30-R4300
▷	B33-27-427	White	50.80	95.25	25.40	11.18 mm - 22.35 mm	101.60	400	B30-R4300
▲	B33-640-427AW	White	55.88	38.10	-		45.08	1500	B30-R4300
▷	B33-26-427	White	63.50	57.15	19.05	6.10 mm - 12.19 mm	61.90	500	B30-R4300
▲	B33-648-427AW	White	66.68	25.40	-		32.38	1500	B30-R4300



# WIRE AND CABLE IDENTIFICATION - DATACOM/ELECTRICAL


## B-427 rotating self-laminating labels

Legible from any angle: identify cables faster

- The B-427 self-laminating Rotating Label version can increase the speed of cable identification because its print can be read from any angle.
- The label can be rotated around a cable thanks to a non-adhesive printable zone and a translucent, self-adhesive laminate that is wrapped around a cable.



Diagram	Order Reference	Colour	Label Width A (mm)	Label Height B (mm)	Printable Area PH (mm)	Wire Diameter Range (mm)	Vertical Repeat D (mm)	Labels per Roll	Printer Ribbon Series
B-427: Self-laminating Vinyl									
	B33R0-292-427	White	12.70	44.45	17.78	2.69 mm - 5.66 mm	65.41	1500	R4300
	B33R0-293-427	White	12.70	69.85	27.94	3.99 mm - 8.89 mm	100.97	900	R4300
	B33R0-294-427	White	25.40	44.45	17.78	2.69 mm - 5.66 mm	65.41	1000	R4300
	B33R0-295-427	White	25.40	69.85	27.94	3.99 mm - 8.89 mm	100.97	700	R4300
	B33R0-296-427	White	25.40	79.38	31.75	4.39 mm - 10.11 mm	114.30	600	R4300
	B33R0-297-427	White	25.40	30.48	12.70	2.01 mm - 4.04 mm	46.36	600	R4300
	B33R0-299-427	White	50.80	79.38	31.75	4.39 mm - 10.11 mm	114.30	250	R4300




## B-483 QuickFlag tapered wire and cable flag labels

One-sided labels

- Quickly flag wires and cables with the B-483 QuickFlag™ label material, featuring a tapered design to prevent mismatched edges and make flag installation much faster.



Diagram	Order Reference	Colour	Label Width A (mm)	Label Height B (mm)	Printable Area Height PH (mm)	Printable Area Width PW (mm)	Labels per Roll
B-483A: Polyester							
	B33-360-483	White	25.40	50.80	25.40	25.40	1500
	B33-361-483	White	48.26	50.80	25.40	48.26	1500




## B-498 Repositionable vinyl cloth wire & cable markers

Holds strong but can be removed cleanly and re-applied

- A vinyl cloth label for marking wires, cables and inside-panel components
- Highly unique adhesive and cloth construction gives excellent holding power and still allows for clean removal and re-application
- Ideal choice for marking both ends of a wire that you may need to cut shorted before final termination



Diagram	Order Reference	Colour	Label Width A (mm)	Label Height B (mm)	Vertical Repeat D (mm)	Labels per Roll	Printer Ribbon Series
B-498: Vinyl Cloth							
	B33-1-498	White	19.05	6.35	8.89	5000	B30-R6200
	B33-254-498	White	19.05	19.05	21.59	1000	B30-R6200
	B33-325-498	White	25.40	63.50	66.68	700	B30-R6200
	B33-326-498	White	25.40	101.60	104.78	450	B30-R6200
	B33-327-498	White	38.10	101.60	104.78	450	B30-R6200
	B33-5-498	White	25.40	12.70	15.24	5000	B30-R6200
	B33-68-498	White	12.70	19.05	21.59	5000	B30-R6200
	B33-87-498	White	12.70	36.50	39.70	2500	B30-R6200
	B33-88-498	White	25.40	19.05	22.23	2500	B30-R6200
	B33-89-498	White	25.40	36.50	39.70	2300	B30-R6200
	B33-90-498	White	6.35	36.50	39.70	2500	B30-R6200
	B33-91-498	White	19.05	23.80	27.00	2500	B30-R6200
	B33-95-498	White	20.32	36.50	39.70	2300	B30-R6200



# WIRE AND CABLE IDENTIFICATION - DATACOM/ELECTRICAL



## B-499 Wire & cable markers

This nylon cloth material has superb adhesive power, making it a flexible all surfaces solution




Diagram	Order Reference	Colour	Label Width A (mm)	Label Height B (mm)	Vertical Repeat D (mm)	Labels per Roll	Printer Ribbon Series
B-499: Nylon Cloth							
▲	B33-125-499	White	22.86	12.70	15.24	1500	B30-R4300
●	B33-1-499	White	19.05	6.35	8.89	10000	B30-R6000
▲	B33-151-499	White	50.80	6.35	8.89	1500	B30-R4300
●	B33-152-499	White	25.40	9.53	12.07	1500	B30-R4300
▲	B33-254-499	White	19.05	19.05	21.59	1000	B30-R6000
●	B33-325-499	White	25.40	63.50	66.68	700	B30-R6000
●	B33-326-499	White	25.40	101.60	104.78	450	B30-R6000
●	B33-327-499	White	38.10	101.60	104.78	450	B30-R6000
●	B33-328-499	White	38.10	152.40	155.58	300	B30-R6000
●	B33-5-499	White	25.40	12.70	15.24	5000	B30-R6000
●	B33-611-499	White	12.70	25.40	28.40	3000	B30-R6000
▲	B33-620-499	White	12.70	25.40	28.40	1000	B30-R6000
●	B33-621-499	White	25.40	36.50	39.50	3000	B30-R6000
●	B33-625-499	White	25.40	66.68	69.68	1500	B30-R6000
▲	B33-659-499	White	25.40	12.45	15.40	1000	B30-R6000
●	B33-87-499	White	12.70	36.50	39.67	2500	B30-R6000
●	B33-88-499	White	25.40	19.05	22.23	2500	B30-R6000
●	B33-89-499	White	25.40	36.50	39.67	2300	B30-R6000
●	B33-90-499	White	6.35	36.50	39.67	2500	B30-R6000
●	B33-91-499	White	19.05	23.80	26.97	2500	B30-R6000



## B-472 Polyimide high temp adhesive wire & cable labels

Topcoated Polyimide label for wire & cable marking where high temperature and self-extinguishing features are required

- Heavy duty performance with excellent resistance to water, oil and other fluids




Diagram	Order Reference	Colour	Label Width A (mm)	Label Height B (mm)	Vertical Repeat D (mm)	Labels per Roll	Printer Ribbon Series
B-472: Polyimide							
●	B33-11-472	White	6.35	6.35	9.53	15000	B30-R4300
●	B33-1-472	White	19.05	6.35	8.89	5000	B30-R4300
●	B33-2-472	White	22.86	6.35	8.89	5000	B30-R4300
●	B33-29-472	White	31.75	9.53	12.07	5000	B30-R4300
●	B33-5-472	White	25.40	12.70	15.24	5000	B30-R4300
●	B33-5-472-YL	Yellow	25.40	12.70	15.24	5000	B30-R4300
∞	B33C-1000-472	White	25.40	-	-	1	B30-R4300
∞	B33C-1000-472YL	Yellow	25.40	-	-	1	B30-R4300
∞	B33C-1500-472	White	38.10	-	-	1	B30-R4300
∞	B33C-1500-472YL	Yellow	38.10	-	-	1	B30-R4300
∞	B33C-2000-472	White	50.80	-	-	1	B30-R4300
∞	B33C-2000-472YL	Yellow	50.80	-	-	1	B30-R4300
∞	B33C-3000-472	White	76.20	-	-	1	B30-R4300
∞	B33C-3000-472YL	Yellow	76.20	-	-	1	B30-R4300

# WIRE AND CABLE IDENTIFICATION - DATACOM/ELECTRICAL


## B-425 Fibre optic labels

Ideal for marking fibre optic cables

- Allows you to handle and view labels without touching the wires



Diagram	Order Reference	Colour	Label Width A (mm)	Label Height B (mm)	Max. Wire Diameter (mm)	Vertical Repeat D (mm)	Labels per Roll	Printer Ribbon Series
B-425A: Polypropylene								
	B33FP-01-425	White	30.00	20.00	5.40	26.03	1000	B30-R4300
	B33FT-01-425	White	30.00	20.00	5.40	46.03	1000	B30-R4300




## B-437 Tedlar adhesive wire & cable labels

Topcoated Polyvinylfluoride label for wire & cable marking where high temperature and self-extinguishing features are required

- Heavy duty performance with excellent resistance to water, oil and other fluids
- Meets MIL-M-87958 Standard



Diagram	Order Reference	Colour	Label Width A (mm)	Label Height B (mm)	Label Length B (m)	Wire Diameter Range (mm)	Vertical Repeat D (mm)	Labels per Roll	Printer Ribbon Series
B-437: Polyvinylfluoride									
	B33-11-437	White	6.35	6.35		0.76 mm - 2.03 mm	9.53	15000	B30-R4300
	B33-1-437	White	19.05	6.35		0.76 mm - 2.03 mm	8.89	5000	B30-R4300
	B33-29-437	White	31.75	9.53		1.27 mm - 3.05 mm	12.07	5000	B30-R4300
	B33-29-437YL	Yellow	31.75	9.53		1.27 mm - 3.05 mm	12.07	5000	B30-R4300
	B33-5-437	White	25.40	12.70		1.52 mm - 4.06 mm	15.19	5000	B30-R4300
	B33-5-437YL	Yellow	25.40	12.70		1.52 mm - 4.06 mm	15.19	5000	B30-R4300
	B33C-1000-437	White	25.40	-	25.91 m		-	1	B30-R4300
	B33C-1000-437YL	Yellow	25.40	-	25.91 m		-	1	B30-R4300
	B33C-1500-437	White	38.10	-	25.91 m		-	1	B30-R4300
	B33C-2000-437	White	50.80	-	25.91 m		-	1	B30-R4300
	B33C-2000-437YL	Yellow	50.80	-	25.91 m		-	1	B30-R4300
	B33C-3000-437	White	76.20	-	25.91 m		-	1	B30-R4300
	B30C-4000-437	White	101.60	-	45.72 m		-	1	B30-R4300



## B-7599 Polyethylene tag

Rapido wire marking sleeves





Diagram	Order Reference	Colour	Label Width A (mm)	Label Height B (mm)	Vertical Repeat D (mm)	Labels per Roll	Printer Ribbon Series
B-7599: Polyethylene							
	B33R-01-7599-YL	Yellow	23.00	5.20	8.39	2500	B30-R4300, B30-R6200
	B33R-02-7599-YL	Yellow	23.00	5.20	8.39	2500	B30-R4300, B30-R6200
	B33R-03-7599-YL	Yellow	25.00	5.70	8.89	2500	B30-R4300, B30-R6200



## B-7597 Tear resistant tags

This tag can be used for a variety of applications including identification of multi-conductor cables, inventory and equipment

Diagram	Order Reference	Colour	Label Width A (mm)	Label Height B (mm)	Vertical Repeat D (mm)	Labels per Roll	Printer Ribbon Series
B-7597: Polyethylene							
	B33-7597W-2050	White	50.80	12.70	16.72	2000	B30-R4300



# WIRE AND CABLE IDENTIFICATION - DATACOM/ELECTRICAL



## B-7598 Polyester cable tag

Durable outdoor cable identification




Diagram	Order Reference	Colour	Label Width A (mm)	Label Height B (mm)	Vertical Repeat D (mm)	Labels per Roll	Printer Ribbon Series
B-7598: Polyester							
	B33-60x10-7598-BK	Black	60.00	10.00	15.08	1000	B30-R4400-WT
	B33-60x10-7598-BL	Blue	60.00	10.00	15.08	1000	B30-R6000
	B33-60x10-7598-GN	Green	60.00	10.00	15.08	1000	B30-R6000
	B33-60x10-7598-RD	Red	60.00	10.00	15.08	1000	B30-R6000
	B33-60x10-7598-SV	Silver	60.00	10.00	15.08	1000	B30-R6000
	B33-60x10-7598-WT	White	60.00	10.00	15.08	1000	B30-R6000
	B33-60x10-7598-YL	Yellow	60.00	10.00	15.08	1000	B30-R6000
	B33-75x10-7598-BK	Black	75.00	10.00	15.08	1000	B30-R4400-WT
	B33-75x10-7598-BL	Blue	75.00	10.00	15.08	1000	B30-R6000
	B33-75x10-7598-GN	Green	75.00	10.00	15.08	1000	B30-R6000
	B33-75x10-7598-RD	Red	75.00	10.00	15.08	1000	B30-R6000
	B33-75x10-7598-SV	Silver	75.00	10.00	15.08	1000	B30-R6000
	B33-75x10-7598-WT	White	75.00	10.00	15.08	1000	B30-R6000
	B33-75x10-7598-YL	Yellow	75.00	10.00	15.08	1000	B30-R6000
	B33-75x15-7598-BK	Black	75.00	15.00	20.02	1000	B30-R4400-WT
	B33-75x15-7598-BL	Blue	75.00	15.00	20.02	1000	B30-R6000
	B33-75x15-7598-GN	Green	75.00	15.00	20.02	1000	B30-R6000
	B33-75x15-7598-RD	Red	75.00	15.00	20.02	1000	B30-R6000
	B33-75x15-7598-WT	White	75.00	15.00	20.02	1000	B30-R6000
	B33-75x15-7598-YL	Yellow	75.00	15.00	20.02	1000	B30-R6000
	B33-75x25-7598-BK	Black	75.00	25.00	30.16	500	B30-R4400-WT
	B33-75x25-7598-GN	Green	75.00	25.00	30.16	500	B30-R6000
	B33-75x25-7598-RD	Red	75.00	25.00	30.16	500	B30-R6000
	B33-75x25-7598-WT	White	75.00	25.00	30.16	500	B30-R6000
	B33-75x25-7598-YL	Yellow	75.00	25.00	30.16	500	B30-R6000



## B-7643 Halogen-free cable tag

Easily print cable tags wherever you are




Diagram	Order Reference	Colour	Label Width A (mm)	Label Height B (mm)	Vertical Repeat D (mm)	Labels per Roll	Printer Ribbon Series
B-7643: Thermoplastic Polyether Polyurethane							
	B33-6010-7643-WT	White	60.00	10.00	-	500	B30-R6000
	B33-6010-7643-YL	Yellow	60.00	10.00	-	500	B30-R6000
	B33-60x10-7643-BK	Black	60.00	10.00	15.08	750	B30-R4400-WT
	B33-60x10-7643-BL	Blue	60.00	10.00	15.08	750	B30-R6000
	B33-60x10-7643-GN	Green	60.00	10.00	15.08	750	B30-R6000
	B33-60x10-7643-OR	Orange	60.00	10.00	15.08	750	B30-R6000
	B33-60x10-7643-RD	Red	60.00	10.00	15.08	750	B30-R6000
	B33-60x10-7643-WT	White	60.00	10.00	15.08	750	B30-R6000
	B33-60x10-7643-YL	Yellow	60.00	10.00	15.08	750	B30-R6000
	B33-7510-7643-WT	White	75.00	10.00	-	500	B30-R6000
	B33-7510-7643-YL	Yellow	75.00	10.00	-	500	B30-R6000
	B33-7515-7643-WT	White	75.00	15.00	-	500	B30-R6000
	B33-7515-7643-YL	Yellow	75.00	15.00	-	500	B30-R6000


>>

# WIRE AND CABLE IDENTIFICATION - DATACOM/ELECTRICAL

## B-7643 Halogen-free cable tag (Continued)

Easily print cable tags wherever you are


Diagram	Order Reference	Colour	Label Width A (mm)	Label Height B (mm)	Vertical Repeat D (mm)	Labels per Roll	Printer Ribbon Series
	B33-7525-7643-WT	White	75.00	25.00	–	250	B30-R6000
	B33-7525-7643-YL	Yellow	75.00	25.00	–	250	B30-R6000
	B33-75x10-7643-BK	Black	75.00	10.00	15.08	750	B30-R4400-WT
	B33-75x10-7643-BL	Blue	75.00	10.00	15.08	750	B30-R6000
	B33-75x10-7643-GN	Green	75.00	10.00	15.08	750	B30-R6000
	B33-75x10-7643-OR	Orange	75.00	10.00	15.08	750	B30-R6000
	B33-75x10-7643-RD	Red	75.00	10.00	15.08	750	B30-R6000
	B33-75x10-7643-WT	White	75.00	10.00	15.08	750	B30-R6000
	B33-75x10-7643-YL	Yellow	75.00	10.00	15.08	750	B30-R6000
	B33-75x15-7643-BK	Black	75.00	15.00	20.02	500	B30-R4400-WT
	B33-75x15-7643-BL	Blue	75.00	15.00	20.02	500	B30-R6000
	B33-75x15-7643-GN	Green	75.00	15.00	20.02	500	B30-R6000
	B33-75x15-7643-OR	Orange	75.00	15.00	20.02	500	B30-R6000
	B33-75x15-7643-RD	Red	75.00	15.00	20.02	500	B30-R6000
	B33-75x15-7643-WT	White	75.00	15.00	20.02	500	B30-R6000
	B33-75x15-7643-YL	Yellow	75.00	15.00	20.02	500	B30-R6000
	B33-75x25-7643-BK	Black	75.00	25.00	30.16	250	B30-R4400-WT
	B33-75x25-7643-BL	Blue	75.00	25.00	30.16	250	B30-R6000
	B33-75x25-7643-GN	Green	75.00	25.00	30.16	250	B30-R6000
	B33-75x25-7643-OR	Orange	75.00	25.00	30.16	250	B30-R6000
	B33-75x25-7643-RD	Red	75.00	25.00	30.16	250	B30-R6000
	B33-75x25-7643-WT	White	75.00	25.00	30.16	250	B30-R6000
	B33-75x25-7643-YL	Yellow	75.00	25.00	30.16	250	B30-R6000



## B-348 Mass transit cable tag

Fully compliant mass transit tag

Diagram	Order Reference	Colour	Label Width A (mm)	Label Height B (mm)	Vertical Repeat D (mm)	Labels per Roll	Printer Ribbon Series
B-348: Polyolefin							
	B33-6010-348-WT	White	60.00	10.00	15.08	750	B30-R6000
	B33-6010-348-YL	Yellow	60.00	10.00	15.08	750	B30-R6000
	B33-7510-348-WT	White	75.00	10.00	15.08	750	B30-R6000
	B33-7510-348-YL	Yellow	75.00	10.00	15.08	750	B30-R6000
	B33-7515-348-WT	White	75.00	15.00	20.02	500	B30-R6000
	B33-7515-348-YL	Yellow	75.00	15.00	20.02	500	B30-R6000
	B33-7525-348-WT	White	75.00	25.00	30.16	250	B30-R6000
	B33-7525-348-YL	Yellow	75.00	25.00	30.16	250	B30-R6000



# WIRE AND CABLE IDENTIFICATION - DATACOM/ELECTRICAL

## How to select a wire marker

There are four main questions to ask yourself when you're starting the process of marking wires. These questions will help you select a wire marker that best suits your needs.

### 1. Are you marking the wire after termination?

Sleeve markers can only be used before termination because they must be slipped over the open end of the wire. These non-adhesive markers provide flexibility as they can be moved prior to being heat-shrunk. Once shrunk, these markers fit snugly around wires for permanent identification which will stand up to harsh environments.

### 2. What size of wire are you marking?


The diameter of the wire determines the size of the sleeve or the height of the label to be used.

### 3. Will you print your own markers or purchase preprinted ones?

Pre-printed markers are available in a large variety of stock legends, and custom legends are available for any large jobs. These markers come in a variety of packaging and formats for ease of use and ease of transport. They are ideal for any application. Printable markers are meant to be printed with variable legends as needed. Various methods for this include: portable wire marking printers or computer software linked to thermal transfer, dot matrix or laser-printers. An extensive array of sizes are available for every application. These printable markers offer the flexibility of printing legends on demand. They are also ideal for applications that require long legends.

### 4. In what type of environment will these wire markers be placed?

It is extremely important to select a wire marker material that will last for your application. Too many companies go to the trouble of marking only to have to do it all again because they did not select the correct material. Be sure to ask yourself these questions before you select your wire marker.

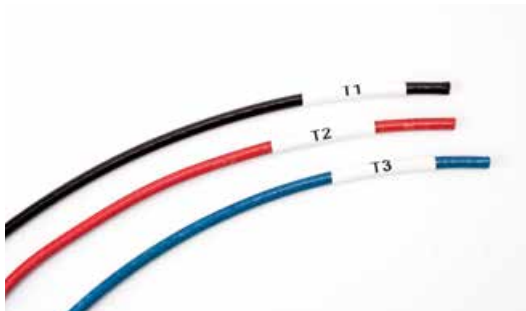

## How to select a marker size

Brady offers a variety of marker sizes for your wire marking needs. Please view the chart listed below to assist you in choosing the minimum recommended flattened sleeve height for the wire or cable that you are identifying.

Order Reference	Label Height B (mm)	Max. Wire Diameter (mm)	Min. Wire Diameter (mm)
<b>B-342 Heat-shrink Polyolefin Sleeve</b>			
094	4.62	2.03	0.58
125	5.97	2.79	1.17
187	8.51	3.81	1.57
250	11.15	5.46	2.39
375	16.38	8.13	3.18
500	21.62	11.43	4.75
750	31.75	17.78	6.35
1000	42.16	24.13	9.53
1500	61.80	36.83	12.70
<b>B-345 High Temperature Heat-shrink Polyvinylidene Fluoride Sleeve</b>			
094	4.62	2.03	0.80
125	5.97	2.79	1.57
187	8.51	3.81	2.39
250	11.15	5.46	3.18
375	16.38	8.13	4.75
500	21.62	11.43	6.35
750	31.75	17.78	9.53
1000	42.16	24.13	11.40
1500	61.80	36.83	19.05
<b>B-7641 Heat-shrink Polyolefin Sleeve</b>			
094	4.62	2.03	1.19
125	5.97	2.79	1.57
187	8.51	3.81	2.39
250	11.15	5.46	3.18
375	16.38	8.13	4.78
500	21.62	11.43	6.35
750	31.75	17.78	9.53
1000	42.16	24.13	12.70
1500	61.80	36.83	19.05
2000	80.39	49.53	25.40
<b>B-7642 Heat-shrink Polyolefin Sleeve</b>			
094	4.62	2.03	1.19
125	5.97	2.79	1.57
187	8.51	3.81	2.39
250	11.15	5.46	3.18
375	16.38	8.13	4.78
500	21.62	11.43	6.35
750	31.75	17.78	9.53
1000	42.16	24.13	12.70
1500	61.80	36.83	19.05
2000	80.39	49.53	25.40

# WIRE AND CABLE IDENTIFICATION - DATACOM/ELECTRICAL


## B-345 PermaSleeve HT high temperature PVDF wire marking sleeves

High temperature, low outgassing. 2:1 Shrink Ratio

- A 2:1 shrink ratio wire marker sleeve specifically designed for high temperature and low vacuum outgassing applications
- Made from irradiated high-temp Polyvinylidene Fluoride (PVDF) heat shrink tubing
- Fade-resistant and flame-retardant



Diagram	Order Reference	Colour	Label Width A (mm)	Label Height B (mm)	Wire Diameter Range (mm)	Vertical Repeat D (mm)	Labels per Roll	Printer Ribbon Series
B-345: High Temperature Heat-shrink Polyvinylidene Fluoride								
V	B33D-94-2-345	White	50.80	4.62	0.80 mm - 2.03 mm	12.70	1000	B30-R6000
V	B33D-125-2-345	White	50.80	5.97	1.57 mm - 2.79 mm	12.70	1000	B30-R6000
V	B33D-187-2-345	White	50.80	8.51	2.39 mm - 3.81 mm	15.88	750	B30-R6000
V	B33D-250-2-345	White	50.80	11.15	3.18 mm - 5.46 mm	19.05	500	B30-R6000
V	B33D-375-2-345	White	50.80	16.38	4.75 mm - 8.13 mm	25.40	500	B30-R6000
V	B33D-500-2-345	White	50.80	21.62	6.35 mm - 11.43 mm	31.75	350	B30-R6000
V	B33D-750-2-345	White	50.80	31.75	9.53 mm - 17.78 mm	41.28	250	B30-R6000



### How to read your PermaSleeve order reference

**Example order reference:** **B33D - 187 - 2 - BK - 4**  
 Product      Diameter      Width      Colour      Pieces

Order reference components PermaSleeve wire marking sleeves:

Product type	
B33 = Single-sided Printing	B33D = Double-sided Printing

Sleeve diameter
094 = 3/32" size fits wire diameter 0.58mm - 2.03mm
125 = 1/8" size fits wire diameter 1.17mm - 2.79mm
187 = 3/16" size fits wire diameter 1.57mm - 3.81mm
250 = 1/4" size fits wire diameter 2.39mm - 5.46mm
375 = 3/8" size fits wire diameter 3.18mm - 8.13mm
500 = 1/2" size fits wire diameter 4.75mm - 11.43mm
750 = 3/4" size fits wire diameter 6.35mm - 17.78mm
1000 = 1" size fits wire diameter 9.53mm - 24.13mm
1500 = 1 1/2" size fits wire diameter 12.7mm - 36.83mm

Sleeve width
2 = 50.80mm

Sleeve Colour
BK = Black      WT = White      YL = Yellow

**Optional: Pieces Per Sleeve**  
 While 1 marker per sleeve is standard, the sleeve can be split into multiple pieces.  
 Example: B33-1500-2-342-2 This \*2 means that this 50.80mm sleeve is slit into two 25.40mm pieces

# WIRE AND CABLE IDENTIFICATION - DATACOM/ELECTRICAL

## B-342 PermaSleeve PS polyolefin wire marking sleeves

Standard military/industrial grade. 3:1 Shrink ratio

- A 3:1 heat shrinkable wire marker sleeve that fits snugly around wires
- Can be used for identification or wire protection
- Fade-resistant and flame-retardant






Diagram	Order Reference	Colour	Label Width A (mm)	Label Height B (mm)	Wire Diameter Range (mm)	Vertical Repeat D (mm)	Labels per Roll	Printer Ribbon Series
B-342: Heat-shrink Polyolefin								
V	B33-94-2-342-2	White	25.40	4.62	0.58 mm - 2.03 mm	12.70	2000	B30-R4300
V	B33-94-2-342YL-2	Yellow	25.40	4.62	0.58 mm - 2.03 mm	12.70	2000	B30-R4300
V	B33D-94-2-342BK	Black	50.80	4.62	0.58 mm - 2.03 mm	12.70	1000	B30-R4500-SV
V	B33-94-2-342	White	50.80	4.62	0.58 mm - 2.03 mm	12.70	1000	B30-R4300
V	B33D-94-2-342	White	50.80	4.62	0.58 mm - 2.03 mm	12.70	1000	B30-R4300
V	B33-94-2-342YL	Yellow	50.80	4.62	0.58 mm - 2.03 mm	12.70	1000	B30-R4300
V	B33D-94-2-342YL	Yellow	50.80	4.62	0.58 mm - 2.03 mm	12.70	1000	B30-R4300
V	B33-125-2-342-2	White	25.40	5.97	1.17 mm - 2.79 mm	12.70	2000	B30-R4300
V	B33-125-2-342YL-2	Yellow	25.40	5.97	1.17 mm - 2.79 mm	12.70	2000	B30-R4300
V	B33D-125-2-342BK	Black	50.80	5.97	1.17 mm - 2.79 mm	12.70	1000	B30-R6700
V	B33D-125-2-342	White	50.80	5.97	1.17 mm - 2.79 mm	12.70	1000	B30-R4300
V	B33-125-2-342	White	50.80	5.97	1.17 mm - 2.79 mm	12.70	1000	B30-R4300
V	B33D-125-2-342YL	Yellow	50.80	5.97	1.17 mm - 2.79 mm	12.70	1000	B30-R4300
V	B33-125-2-342YL	Yellow	50.80	5.97	1.17 mm - 2.79 mm	12.70	1000	B30-R4300
V	B33-187-2-342-2	White	25.40	8.51	1.57 mm - 3.81 mm	15.88	1500	B30-R4300
V	B33D-187-2-342BK	Black	50.80	8.51	1.57 mm - 3.81 mm	15.88	750	B30-R6700
V	B33D-187-2-342	White	50.80	8.51	1.57 mm - 3.81 mm	15.88	750	B30-R4300
V	B33-187-2-342	White	50.80	8.51	1.57 mm - 3.81 mm	15.88	750	B30-R4300
V	B33D-187-2-342YL	Yellow	50.80	8.51	1.57 mm - 3.81 mm	15.88	750	B30-R4300
V	B33-187-2-342YL	Yellow	50.80	8.51	1.57 mm - 3.81 mm	15.88	750	B30-R4300
V	B33-250-2-342-2	White	25.40	11.15	2.39 mm - 5.46 mm	19.05	1000	B30-R4300
V	B33D-250-2-342	White	50.80	11.15	2.39 mm - 5.46 mm	19.05	500	B30-R4300
V	B33-250-2-342	White	50.80	11.15	2.39 mm - 5.46 mm	19.05	500	B30-R4300
V	B33-250-2-342YL	Yellow	50.80	11.15	2.39 mm - 5.46 mm	19.05	500	B30-R4300
V	B33D-250-2-342YL	Yellow	50.80	11.15	2.39 mm - 5.46 mm	19.05	500	B30-R4300
V	B33-375-2-342-2	White	25.40	16.38	3.18 mm - 8.13 mm	25.40	1000	B30-R4300
V	B33D-375-2-342	White	50.80	16.38	3.18 mm - 8.13 mm	25.40	500	B30-R4300
V	B33-375-2-342	White	50.80	16.38	3.18 mm - 8.13 mm	25.40	500	B30-R4300
V	B33-375-2-342YL	Yellow	50.80	16.38	3.18 mm - 8.13 mm	25.40	500	B30-R4300
V	B33D-375-2-342YL	Yellow	50.80	16.38	3.18 mm - 8.13 mm	25.40	500	B30-R4300
V	B33-500-2-342-2	White	25.40	21.62	4.75 mm - 11.43 mm	31.75	700	B30-R4300
V	B33-500-2-342YL-2	Yellow	25.40	21.62	4.75 mm - 11.43 mm	31.75	700	B30-R4300
V	B33D-500-2-342	White	50.80	21.62	4.75 mm - 11.43 mm	31.75	350	B30-R4300
V	B33-500-2-342	White	50.80	21.62	4.75 mm - 11.43 mm	31.75	350	B30-R4300
V	B33-500-2-342YL	Yellow	50.80	21.62	4.75 mm - 11.43 mm	31.75	350	B30-R4300
V	B33D-500-2-342YL	Yellow	50.80	21.62	4.75 mm - 11.43 mm	31.75	350	B30-R4300
V	B33D-750-2-342BK	Black	50.80	31.75	6.35 mm - 17.78 mm	41.28	250	B30-R6700
V	B33D-750-2-342	White	50.80	31.75	6.35 mm - 17.78 mm	41.28	250	B30-R4300
V	B33-750-2-342	White	50.80	31.75	6.35 mm - 17.78 mm	41.28	250	B30-R4300
V	B33D-750-2-342YL	Yellow	50.80	31.75	6.35 mm - 17.78 mm	41.28	250	B30-R4300
V	B33-750-2-342YL	Yellow	50.80	31.75	6.35 mm - 17.78 mm	41.28	250	B30-R4300
V	B33-1000-2-342	White	50.80	42.16	8.46 mm - 24.13 mm	50.80	250	B30-R4300
V	B33D-1000-2-342YL	Yellow	50.80	42.16	8.46 mm - 24.13 mm	50.80	250	B30-R4300
V	B33-1000-2-342YL	Yellow	50.80	42.16	8.46 mm - 24.13 mm	50.80	250	B30-R4300
V	B33-1500-2-342YL-2	Yellow	25.40	61.80	12.70 mm - 36.83 mm	76.20	300	B30-R4300
V	B33D-1500-2-342BK	Black	50.80	61.80	12.70 mm - 36.83 mm	76.20	150	B30-R6700

# WIRE AND CABLE IDENTIFICATION - DATACOM/ELECTRICAL

## B-342 PermaSleeve PS polyolefin wire marking sleeves (Continued)

Standard military/industrial grade. 3:1 Shrink ratio

Diagram	Order Reference	Colour	Label Width A (mm)	Label Height B (mm)	Wire Diameter Range (mm)	Vertical Repeat D (mm)	Labels per Roll	Printer Ribbon Series
V	B33D-1500-2-342	White	50.80	61.80	12.70 mm - 36.83 mm	76.20	150	B30-R4300
V	B33-1500-2-342	White	50.80	61.80	12.70 mm - 36.83 mm	76.20	150	B30-R4300
V	B33D-1500-2-342YL	Yellow	50.80	61.80	12.70 mm - 36.83 mm	76.20	150	B30-R4300
V	B33-1500-2-342YL	Yellow	50.80	61.80	12.70 mm - 36.83 mm	76.20	150	B30-R4300




## B-7641 PermaSleeve low smoke zero halogen wire marking sleeves

Permanent heat shrink wire identification

- A 2:1 double-sided printable heat-shrink Polyolefin wire marker sleeve designed for wire identification and insulation purposes
- Contains no added halogens, offers excellent flame retardant characteristics combined with minimal smoke emission



Diagram	Order Reference	Colour	Label Width A (mm)	Label Height B (mm)	Wire Diameter Range (mm)	Vertical Repeat D (mm)	Labels per Roll	Printer Ribbon Series
B-7641: Heat-shrink Polyolefin								
V	B33D-94-2-7641	White	50.80	4.62	1.19 mm - 2.03 mm	12.70	500	B30-R6600
V	B33D-125-2-7641	White	50.80	5.97	1.57 mm - 2.79 mm	12.70	500	B30-R6600
V	B33D-125-2-7641Y	Yellow	50.80	5.97	1.57 mm - 2.79 mm	12.70	500	B30-R6600
V	B33D-187-2-7641	White	50.80	8.51	2.39 mm - 3.81 mm	15.88	450	B30-R6600
V	B33D-187-2-7641Y	Yellow	50.80	8.51	2.39 mm - 3.81 mm	15.88	450	B30-R6600
V	B33D-250-2-7641	White	50.80	11.15	3.18 mm - 5.46 mm	19.05	400	B30-R6600
V	B33D-250-2-7641Y	Yellow	50.80	11.15	3.18 mm - 5.46 mm	19.05	400	B30-R6600
V	B33D-375-2-7641	White	50.80	16.38	4.78 mm - 8.13 mm	25.40	250	B30-R6600
V	B33D-375-2-7641Y	Yellow	50.80	16.38	4.78 mm - 8.13 mm	25.40	250	B30-R6600
V	B33D-500-2-7641	White	50.80	21.62	6.35 mm - 11.43 mm	31.75	225	B30-R6600
V	B33D-500-2-7641Y	Yellow	50.80	21.62	6.35 mm - 11.43 mm	31.75	225	B30-R6600
V	B33D-750-2-7641Y	Yellow	50.80	31.75	9.53 mm - 17.78 mm	41.28	150	B30-R6600
V	B33D-1000-2-7641Y	Yellow	50.80	42.16	12.70 mm - 24.13 mm	50.80	150	B30-R6600
V	B33D-1500-2-7641	White	50.80	61.80	19.05 mm - 36.83 mm	76.20	50	B30-R6600
V	B33D-1500-2-7641Y	Yellow	50.80	61.80	19.05 mm - 36.83 mm	76.20	50	B30-R6600



### ▶ 2-pass double-side sleeve printing with no wasted sleeves using i5300 printer and Brady Workstation

- Use double-sided sleeve module in Brady workstation
- Change text content, size and even rotation for each side!
- [See a demo](#) at [Bradyeurope.com](http://Bradyeurope.com)



# WIRE AND CABLE IDENTIFICATION - DATACOM/ELECTRICAL



## B-7642 PermaSleeve HX polyolefin wire marking sleeves

Military/Industrial grade. 2:1 Shrink ratio

- A 2:1 heat shrinkable wire marker sleeve that fits snugly around wires
- Flame-retardant and high-temp rated but not as high temp as B-345 “HT” Sleeves




Diagram	Order Reference	Colour	Label Width A (mm)	Label Height B (mm)	Wire Diameter Range (mm)	Vertical Repeat D (mm)	Labels per Roll	Printer Ribbon Series
B-7642: Heat-shrink Polyolefin								
V	B33-94-2-7642	White	50.80	4.62	1.19 mm - 2.03 mm	12.70	500	B30-R4300
V	B33D-94-2-7642	White	50.80	4.62	1.19 mm - 2.03 mm	12.70	500	B30-R4300
V	B33-125-2-7642	White	50.80	5.97	1.57 mm - 2.79 mm	12.70	500	B30-R4300
V	B33D-125-2-7642	White	50.80	5.97	1.57 mm - 2.79 mm	12.70	500	B30-R4300
V	B33-187-2-7642	White	50.80	8.51	2.39 mm - 3.81 mm	15.88	450	B30-R4300
V	B33-250-2-7642	White	50.80	11.15	3.18 mm - 5.46 mm	19.05	400	B30-R4300
V	B33-375-2-7642	White	50.80	16.38	4.78 mm - 8.13 mm	25.40	250	B30-R4300
V	B33-1000-2-7642	White	50.80	42.16	12.70 mm - 24.13 mm	50.80	150	B30-R4300
V	B33D-1000-2-7642	White	50.80	42.16	12.70 mm - 24.13 mm	50.80	150	B30-R4300
V	B33-1500-2-7642	White	50.80	61.80	19.05 mm - 36.83 mm	76.20	50	B30-R4300
V	B33D-1500-2-7642	White	50.80	61.80	19.05 mm - 36.83 mm	76.20	50	B30-R4300

## QuickSleeve Handheld Sleeve Applicator

The QuickSleeve Handheld Sleeve Applicator is an intuitive multi-tool designed to help you quickly apply sleeves on to wires in three simple steps, just pick, slip and apply. This tool includes:

- Four specially designed slanted tubes sized for sleeve sizes 0.094, 0.125, 0.187 and 0.250 inches
- Built-in LED flashlight for use in low-lit conditions
- Terminal block sized screwdriver”



Pick

Slip

Apply



## B-7697 Rigid DuraSleeve wire marking inserts

Diagram	Order Reference	Colour	Label Width A (mm)	Label Height B (mm)	Vertical Repeat D (mm)	Labels per Roll	Printer Ribbon Series
B-7697: Polyester							
≡	B33-10x4.4-7697-WT	White	10.00	4.40	11.46	2500	R4300 R6200
≡	B33-12x4.4-7697-WT	White	12.00	4.40	11.46	2500	R4300 R6200
≡	B33-16x4.4-7697-WT	White	16.00	4.40	11.46	2500	R4300 R6200
≡	B33-23x4.4-7697-WT	White	23.00	4.40	11.46	2500	R4300 R6200
≡	B33-30x4.4-7697-WT	White	30.63	4.40	11.46	2500	R4300 R6200



DuraSleeve tag carriers are produced in transparent PVC. The special shape of the carrier allows it to adapt to cables of various diameters. There are several sizes of carriers which cater for cables with external diameters from 1.30 mm up to 15 mm.

- Temperature range: -40 °C to 60 °C
- Material: PVC

Please contact your local Brady representative to identify and select the most appropriate carrier for your individual application.

# FACILITY AND SAFETY IDENTIFICATION


## Pre-printed Pre-cut blank sign headers

For creating Arc Flash and safety warning labels in seconds

- Allows the printer to create multi-colour signs fast - in a single print pass
- B-595 Indoor/Outdoor grade material conforms to rough, irregular and “difficult to adhere to” surfaces
- B-483 uses an aggressive adhesive specifically designed for powder coated surfaces



Diagram	Order Reference		Label Width A (mm)	Label Height B (mm)	Vertical Repeat D (mm)	Labels per Roll	Printer Ribbon Series
<b>B-483A: Polyester</b>							
⊗	B33-184-483-ANSIWA		76.20	76.20	82.55	500	B30-R6000
⊗	B33-184-483-ANSIDA		76.20	76.20	82.55	500	B30-R6000
⊗	B33-161-483-ANSIDA		101.60	101.60	107.95	370	B30-R6000
⊗	B33-161-483-ANSIWA		101.60	101.60	107.95	370	B30-R6000
<b>B-595: Vinyl</b>							
▲	B30-242-595-BLNKWT		28.58	72.39	82.55	300	B30-R10000
▲	B30-219-595-BLNKWT		57.15	97.79	107.95	250	B30-R10000
▲	B30-241-595-BLNKYL		57.15	76.20	82.55	300	B30-R10000
⊗	B30-241-595-ANSIDA		76.20	57.15	82.55	300	B30-R10000
⊗	B30-241-595-ANSICA		76.20	57.15	82.55	300	B30-R10000
⊗	B30-241-595-ANSIWA		76.20	57.15	82.55	300	B30-R10000
⊗	B30-241-595-ANSINO		76.20	57.15	82.55	300	B30-R10000
⊗	B30-241-595-OSHACA		76.20	57.15	82.55	300	B30-R10000
▲	B30-241-595-BLNKWT		76.20	57.15	82.55	300	B30-R10000
▲	B30-25-595-BLNKYL		101.60	152.40	158.75	175	B30-R10000
⊗	B30-25-595-ANSIDA		152.40	101.60	158.75	175	B30-R10000
⊗	B30-25-595-ANSICA		152.40	101.60	158.75	175	B30-R10000
⊗	B30-25-595-ANSIWA		152.40	101.60	158.75	175	B30-R10000
⊗	B30-25-595-ANSINO		152.40	101.60	158.75	175	B30-R10000
⊗	B30-25-595-OSHADA		152.40	101.60	158.75	175	B30-R10000
⊗	B30-25-595-OSHACA		152.40	101.60	158.75	175	B30-R10000
▲	B30-25-595-BLNKWT		152.40	101.60	158.75	175	B30-R10000

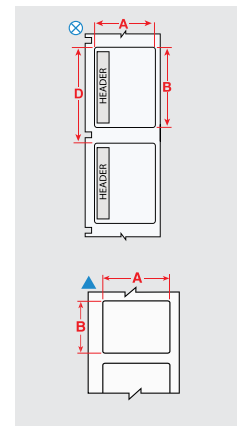

## FACILITY AND SAFETY IDENTIFICATION



### B-551 Non-adhesive pre-printed & pre-cut safety tags

Pre-printed and pre-cut to save you time

- Non-adhesive semi-rigid polyester card stock
  - Tags are pre-cut with hole and chamfered corners
  - Perforated between tags
  - Snap-in plastic grommets available for extra strength around mounting hole.
- Order reference: 020596




Diagram	Order Reference		Label Width A (mm)	Label Height B (mm)	Vertical Repeat D (mm)	Labels per Roll	Printer Ribbon Series
B-851: Polyester							
	B30-255-851-ANSIDA		82.55	146.05	158.75	100	B30-R10000
	B30-255-851-OSHADA		82.55	146.05	158.75	100	B30-R10000
	B30-255-851-ANSICA		82.55	146.05	158.75	100	B30-R10000



### B-595 High performance indoor/outdoor vinyl

For general facility and safety identification: our best industrial vinyl yet

- Durable, low-shrink vinyl with our most aggressive adhesive
- Conforms to irregular, curved, rough and highly textured surfaces (painted cinder blocks, uneven wood, textured plastics, paper-jacketed pipes, powder-coated surfaces)
- Adheres to "difficult low-surface energy items (PVC piping, blow-moulded equipment cases, ABS plastics, recycled plastics)




Diagram	Order Reference	Colour	Label Width A (mm)	Label Length B (m)	Labels per Roll	Printer Ribbon Series
B-595: Vinyl						
	B30C-500-595-BK	Black	12.70	30.48	1	B30-R10000-WT
	B30C-500-595-BL	Blue	12.70	30.48	1	B30-R10000-WT
	B30C-500-595-BR	Brown	12.70	30.48	1	B30-R10000-WT
	B30C-500-595-GD	Gold	12.70	30.48	1	B30-R10000
	B30C-500-595-GN	Green	12.70	30.48	1	B30-R10000-WT
	B30C-500-595-GY	Grey	12.70	30.48	1	B30-R10000
	B30C-500-595-OR	Orange	12.70	30.48	1	B30-R10000
	B30C-500-595-PL	Purple	12.70	30.48	1	B30-R10000-WT
	B30C-500-595-RD	Red	12.70	30.48	1	B30-R10000-WT
	B30C-500-595-CL	Transparent	12.70	30.48	1	B30-R10000
	B30C-500-595-WT	White	12.70	30.48	1	B30-R10000
	B30C-500-595-YL	Yellow	12.70	30.48	1	B30-R10000
	B30C-1125-595-BK	Black	28.58	30.48	1	B30-R10000-WT
	B30C-1125-595-BL	Blue	28.58	30.48	1	B30-R10000-WT
	B30C-1125-595-BR	Brown	28.58	30.48	1	B30-R10000-WT
	B30C-1125-595-GD	Gold	28.58	30.48	1	B30-R10000
	B30C-1125-595-GN	Green	28.58	30.48	1	B30-R10000-WT
	B30C-1125-595-GY	Grey	28.58	30.48	1	B30-R10000
	B30C-1125-595-OC	Ochre	28.58	30.48	1	B30-R10000
	B30C-1125-595-OR	Orange	28.58	30.48	1	B30-R10000
	B30C-1125-595-PL	Purple	28.58	30.48	1	B30-R10000-WT
	B30C-1125-595-RD	Red	28.58	30.48	1	B30-R10000-WT
	B30C-1125-595-CL	Transparent	28.58	30.48	1	B30-R10000
	B30C-1125-595-WT	White	28.58	30.48	1	B30-R10000
	B30C-1125-595-YL	Yellow	28.58	30.48	1	B30-R10000
	B30C-2250-595-BK	Black	57.15	30.48	1	B30-R10000-WT
	B30C-2250-595-BL	Blue	57.15	30.48	1	B30-R10000-WT
	B30C-2250-595-BR	Brown	57.15	30.48	1	B30-R10000-WT
	B30C-2250-595-GD	Gold	57.15	30.48	1	B30-R10000
	B30C-2250-595-GN	Green	57.15	30.48	1	B30-R10000-WT
	B30C-2250-595-GY	Grey	57.15	30.48	1	B30-R10000
	B30C-2250-595-OC	Ochre	57.15	30.48	1	B30-R10000


>>

## FACILITY AND SAFETY IDENTIFICATION

### B-595 High performance indoor/outdoor vinyl (Continued)

For general facility and safety identification: our best industrial vinyl yet

Diagram	Order Reference	Colour	Label Width A (mm)	Label Length B (m)	Labels per Roll	Printer Ribbon Series
∞	B30C-2250-595-OR	Orange	57.15	30.48	1	B30-R10000
∞	B30C-2250-595-PL	Purple	57.15	30.48	1	B30-R10000-WT
∞	B30C-2250-595-RD	Red	57.15	30.48	1	B30-R10000-WT
∞	B30C-2250-595-CL	Transparent	57.15	30.48	1	B30-R10000
∞	B30C-2250-595-WT	White	57.15	30.48	1	B30-R10000
∞	B30C-2250-595-YL	Yellow	57.15	30.48	1	B30-R10000
∞	B30C-3000-595-WT	White	76.20	30.48	1	B30-R10000
∞	B30C-3000-595-YL	Yellow	76.20	30.48	1	B30-R10000
∞	B30C-4000-595-BK	Black	101.60	30.48	1	B30-R10000-WT
∞	B30C-4000-595-BL	Blue	101.60	30.48	1	B30-R10000-WT
∞	B30C-4000-595-BR	Brown	101.60	30.48	1	B30-R10000-WT
∞	B30C-4000-595-GD	Gold	101.60	30.48	1	B30-R10000
∞	B30C-4000-595-GN	Green	101.60	30.48	1	B30-R10000-WT
∞	B30C-4000-595-GY	Grey	101.60	30.48	1	B30-R10000
∞	B30C-4000-595-OC	Ochre	101.60	30.48	1	B30-R10000
∞	B30C-4000-595-OR	Orange	101.60	30.48	1	B30-R10000
∞	B30C-4000-595-PL	Purple	101.60	30.48	1	B30-R10000-WT
∞	B30C-4000-595-RD	Red	101.60	30.48	1	B30-R10000-WT
∞	B30C-4000-595-CL	Transparent	101.60	30.48	1	B30-R10000
∞	B30C-4000-595-WT	White	101.60	30.48	1	B30-R10000
∞	B30C-4000-595-YL	Yellow	101.60	30.48	1	B30-R10000




### B-569 High performance polyester

For labelling stainless steel and smooth surfaces

- Low-halide content for labelling stainless steel pipes and surfaces
- Applies best to very smooth surfaces and ideal for mounting to rigid panels

Diagram	Order Reference	Colour	Label Width A (mm)	Label Length B (m)	Labels per Roll	Printer Ribbon Series
B-569: Polyester						
∞	B30C-500-569-BK	Black	12.70	30.48	1	B30-R10000-WT
∞	B30C-500-569-BL	Blue	12.70	30.48	1	B30-R10000-WT
∞	B30C-500-569-BR	Brown	12.70	30.48	1	B30-R10000-WT
∞	B30C-500-569-GN	Green	12.70	30.48	1	B30-R10000-WT
∞	B30C-500-569-GY	Grey	12.70	30.48	1	B30-R10000
∞	B30C-500-569-LB	Light Blue	12.70	30.48	1	B30-R10000
∞	B30C-500-569-OR	Orange	12.70	30.48	1	B30-R10000
∞	B30C-500-569-PK	Pink	12.70	30.48	1	B30-R10000
∞	B30C-500-569-PL	Purple	12.70	30.48	1	B30-R10000-WT
∞	B30C-500-569-RD	Red	12.70	30.48	1	B30-R10000-WT
∞	B30C-500-569-SB	Sky Blue	12.70	30.48	1	B30-R10000
∞	B30C-500-569-TN	Tan	12.70	30.48	1	B30-R10000
∞	B30C-500-569-CL	Transparent	12.70	30.48	1	B30-R10000
∞	B30C-500-569-WT	White	12.70	30.48	1	B30-R10000
∞	B30C-500-569-YL	Yellow	12.70	30.48	1	B30-R10000
∞	B30C-1125-569-BK	Black	28.58	30.48	1	B30-R10000-WT
∞	B30C-1125-569-BL	Blue	28.58	30.48	1	B30-R10000-WT
∞	B30C-1125-569-BR	Brown	28.58	30.48	1	B30-R10000-WT
∞	B30C-1125-569-GN	Green	28.58	30.48	1	B30-R10000-WT
∞	B30C-1125-569-GY	Grey	28.58	30.48	1	B30-R10000
∞	B30C-1125-569-LB	Light Blue	28.58	30.48	1	B30-R10000
∞	B30C-1125-569-OC	Ochre	28.58	30.48	1	B30-R60000C, B30-R10000
∞	B30C-1125-569-OR	Orange	28.58	30.48	1	B30-R10000
∞	B30C-1125-569-PK	Pink	28.58	30.48	1	B30-R10000
∞	B30C-1125-569-PL	Purple	28.58	30.48	1	B30-R10000-WT
∞	B30C-1125-569-RD	Red	28.58	30.48	1	B30-R10000-WT
∞	B30C-1125-569-SB	Sky Blue	28.58	30.48	1	B30-R10000



>>

# FACILITY AND SAFETY IDENTIFICATION

## B-569 High performance polyester (Continued)

For labelling stainless steel and smooth surfaces




Diagram	Order Reference	Colour	Label Width A (mm)	Label Length B (m)	Labels per Roll	Printer Ribbon Series
∞	B30C-1125-569-SB	Sky Blue	28.58	30.48	1	B30-R10000
∞	B30C-1125-569-TN	Tan	28.58	30.48	1	B30-R10000
∞	B30C-1125-569-CL	Transparent	28.58	30.48	1	B30-R10000
∞	B30C-1125-569-WT	White	28.58	30.48	1	B30-R10000
∞	B30C-1125-569-YL	Yellow	28.58	30.48	1	B30-R10000
∞	B30C-2250-569-BK	Black	57.15	30.48	1	B30-R10000-WT
∞	B30C-2250-569-BL	Blue	57.15	30.48	1	B30-R10000-WT
∞	B30C-2250-569-BR	Brown	57.15	30.48	1	B30-R10000-WT
∞	B30C-2250-569-GN	Green	57.15	30.48	1	B30-R10000-WT
∞	B30C-2250-569-GY	Grey	57.15	30.48	1	B30-R10000
∞	B30C-2250-569-LB	Light Blue	57.15	30.48	1	B30-R10000
∞	B30C-2250-569-OC	Ochre	57.15	30.48	1	B30-R60000C, B30-R10000
∞	B30C-2250-569-OR	Orange	57.15	30.48	1	B30-R10000
∞	B30C-2250-569-PK	Pink	57.15	30.48	1	B30-R10000
∞	B30C-2250-569-PL	Purple	57.15	30.48	1	B30-R10000-WT
∞	B30C-2250-569-RD	Red	57.15	30.48	1	B30-R10000-WT
∞	B30C-2250-569-SB	Sky Blue	57.15	30.48	1	B30-R10000
∞	B30C-2250-569-TN	Tan	57.15	30.48	1	B30-R10000
∞	B30C-2250-569-CL	Transparent	57.15	30.48	1	B30-R10000
∞	B30C-2250-569-WT	White	57.15	30.48	1	B30-R10000
∞	B30C-2250-569-YL	Yellow	57.15	30.48	1	B30-R10000
∞	B30C-3000-569-WT	White	76.20	30.48	1	B30-R10000
∞	B30C-4000-569-BK	Black	101.60	30.48	1	B30-R10000-WT
∞	B30C-4000-569-BL	Blue	101.60	30.48	1	B30-R10000-WT
∞	B30C-4000-569-BR	Brown	101.60	30.48	1	B30-R10000-WT
∞	B30C-4000-569-GN	Green	101.60	30.48	1	B30-R10000-WT
∞	B30C-4000-569-GY	Grey	101.60	30.48	1	B30-R10000
∞	B30C-4000-569-LB	Light Blue	101.60	30.48	1	B30-R10000
∞	B30C-4000-569-OC	Ochre	101.60	30.48	1	B30-R60000C, B30-R10000
∞	B30C-4000-569-OR	Orange	101.60	30.48	1	B30-R10000
∞	B30C-4000-569-PK	Pink	101.60	30.48	1	B30-R10000
∞	B30C-4000-569-PL	Purple	101.60	30.48	1	B30-R10000-WT
∞	B30C-4000-569-RD	Red	101.60	30.48	1	B30-R10000-WT
∞	B30C-4000-569-SB	Sky Blue	101.60	30.48	1	B30-R10000
∞	B30C-4000-569-TN	Tan	101.60	30.48	1	B30-R10000
∞	B30C-4000-569-CL	Transparent	101.60	30.48	1	B30-R10000
∞	B30C-4000-569-WT	White	101.60	30.48	1	B30-R10000
∞	B30C-4000-569-YL	Yellow	101.60	30.48	1	B30-R10000

## B-595 Pre-printed right-to-know chemical labels

For quickly creating NFPA and colour bar labels

- Allows the printer to produce 5 colour chemical labels in a single print pass
- Indoor/Outdoor grade material withstands exposure to moisture, chemicals and handling




Diagram	Order Reference		Label Width A (mm)	Label Height B (mm)	Labels per Row	Labels per Roll	Printer Ribbon Series
▲	B30-244-595-CB		57.15	57.15	1	365	B30-R10000
▲	B30-244-595-NFPA		57.15	57.15	1	365	B30-R10000
▲	B30-244-595-HMIG		57.15	57.15	1	365	B30-R10000



## B-595 Pre-printed right-to-know chemical labels (Continued)

For quickly creating NFPA and colour bar labels

Diagram	Order Reference		Label Width A (mm)	Label Height B (mm)	Labels per Row	Labels per Roll	Printer Ribbon Series
▲	B30-246-595-HMIG		76.20	28.58	1	300	B30-R10000
▲	B30-246-595-NFR		76.20	28.58	1	300	B30-R10000
▲	B30-245-595-CB		101.60	57.15	1	240	B30-R10000
▲	B30-245-595-NFPA		101.60	57.15	1	240	B30-R10000
▲	B30-263-595-NFPA		158.75	101.60	1	170	B30-R10000




## B-7569 Pre-printed CLP/GHS chemical labels

Print 2 colour CLP/GHS labels in one fast print pass

- Blank labels with pre-printed red diamonds allow printer to produce 2 colour CLP/GHS labels in one print pass
- 3 sizes of labels, each with 6 diamond layouts that match templates in Workstation software
- Indoor/outdoor vinyl material withstands exposure to moisture, chemicals and handling

Diagram	Order Reference		Label Width A (mm)	Label Height B (mm)	Labels per Row	Labels per Roll	Printer Ribbon Series
▲	B30-260-7569-CLP1		84.99	55.00	1	340	R10000
▲	B30-260-7569-CLP2		84.99	55.00	1	340	R10000
▲	B30-260-7569-CLP3A		84.99	55.00	1	340	R10000
▲	B30-260-7569-CLP3B		84.99	55.00	1	340	R10000
▲	B30-260-7569-CLP4A		84.99	55.00	1	340	R10000
▲	B30-260-7569-CLP4B		84.99	55.00	1	340	R10000
▲	B30-261-7569-CLP1		110.00	75.00	1	270	R10000
▲	B30-261-7569-CLP2		110.00	75.00	1	270	R10000
▲	B30-261-7569-CLP3A		110.00	75.00	1	270	R10000
▲	B30-261-7569-CLP3B		110.00	75.00	1	270	R10000
▲	B30-261-7569-CLP4A		110.00	75.00	1	270	R10000
▲	B30-261-7569-CLP4B		110.00	75.00	1	270	R10000
▲	B30-262-7569-CLP1		154.99	104.98	1	200	R10000
▲	B30-262-7569-CLP2		154.99	104.98	1	200	R10000
▲	B30-262-7569-CLP3A		154.99	104.98	1	200	R10000
▲	B30-262-7569-CLP3B		154.99	104.98	1	200	R10000
▲	B30-262-7569-CLP4A		154.99	104.98	1	200	R10000
▲	B30-262-7569-CLP4B		154.99	104.98	1	200	R10000
▲	B30-18-7569-CLP4C		76.20	25.40	1	1000	R10000



# FACILITY AND SAFETY IDENTIFICATION



## B-595 Inspection date labels

Print inspection and date labels when and how you need them

- Easy peel off for fast application
- Use the inspection label templates from Brady Workstation
- Available in different colours and sizes




Diagram	Order Reference	Colour	Diameter C (mm)	Vertical Repeat D (mm)	Labels per Roll	Printer Ribbon Series
⊗	B30-D25-595-BL	Blue	25.00	28.575 mm	1000	B30-R10000-WT
⊗	B30-D25-595-BR	Brown	25.00	28.575 mm	1000	B30-R10000-WT
⊗	B30-D25-595-GN	Green	25.00	28.575 mm	1000	B30-R10000-WT
⊗	B30-D25-595-GY	Grey	25.00	28.575 mm	1000	B30-R10000
⊗	B30-D25-595-OC	Ochre	25.00	28.575 mm	1000	B30-R10000
⊗	B30-D25-595-OR	Orange	25.00	28.575 mm	1000	B30-R10000
⊗	B30-D25-595-PL	Purple	25.00	28.575 mm	1000	B30-R10000-WT
⊗	B30-D25-595-WT	White	25.00	28.575 mm	1000	B30-R10000
⊗	B30-D35-595-BL	Blue	35.00	38.10 mm	750	B30-R10000-WT
⊗	B30-D35-595-BR	Brown	35.00	38.10 mm	750	B30-R10000-WT
⊗	B30-D35-595-GN	Green	35.00	38.10 mm	750	B30-R10000-WT
⊗	B30-D35-595-GY	Grey	35.00	38.10 mm	750	B30-R10000
⊗	B30-D35-595-OC	Ochre	35.00	38.10 mm	750	B30-R10000
⊗	B30-D35-595-OR	Orange	35.00	38.10 mm	750	B30-R10000
⊗	B30-D35-595-PL	Purple	35.00	38.10 mm	750	B30-R10000-WT
⊗	B30-D35-595-WT	White	35.00	38.10 mm	750	B30-R10000



## B-854 and B-855 ToughWash washdown resistant labels

Withstands pressures of high heat, harsh chemicals and numerous washdown cycles

- Ideal for use in the Food & Beverage industry
- Legible and long-lasting for even the toughest washdown cycles
- B-854 offers metal detectable layer to detect foreign debris in food stream

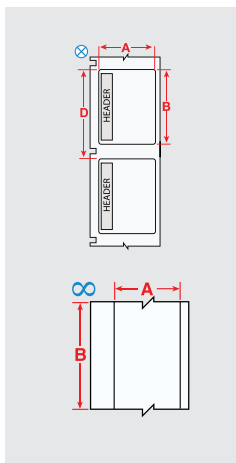


Diagram	Order Reference		Label Width A (mm)	Label Height B (mm)	Label Length B (m)	Vertical Repeat D (mm)	Labels per Roll	Printer Ribbon Series
<b>B-854: Metal Detectable Polyester</b>								
⊗	B30-25-854-WARN		101.60	152.40	-	158.75	100	B30-R6000
⊗	B30-25-854-DANG		101.60	152.40	-	158.75	100	B30-R6000
⊗	B30-25-854-CAUT		101.60	152.40	-	158.75	100	B30-R6000
∞	B30C-4000-854-WT		101.60	-	15.24	-	1	B30-R6000
∞	B30C-4000-854-YL		101.60	-	15.24	-	1	B30-R6000
<b>B-855: Polyester</b>								
⊗	B30-25-855-WARN		101.60	152.40	-	158.75	100	B30-R6000
⊗	B30-25-855-CAUT		101.60	152.40	-	158.75	100	B30-R6000
∞	B30C-1125-855-YL		28.58	-	15.24	-	1	B30-R6000




>>

## FACILITY AND SAFETY IDENTIFICATION

### B-854 and B-855 ToughWash washdown resistant labels (Continued)

Withstands pressures of high heat, harsh chemicals and numerous washdown cycles

Diagram	Order Reference	Label Width A (mm)	Label Height B (mm)	Label Length B (m)	Vertical Repeat D (mm)	Labels per Roll	Printer Ribbon Series
	B30C-1125-855-WT	28.58	-	15.24	-	1	B30-R6000
	B30C-2250-855-YL	57.15	-	15.24	-	1	B30-R6000
	B30C-2250-855-WT	57.15	-	15.24	-	1	B30-R6000
	B30C-4000-855-YL	101.60	-	15.24	-	1	B30-R6000
	B30C-4000-855-WT	101.60	-	15.24	-	1	B30-R6000

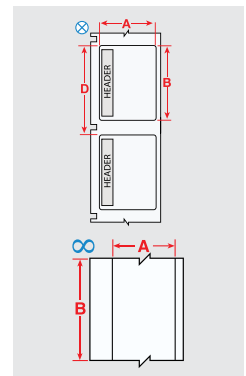


### B-595 and B-7569 Pre-cut Blank labels

For general purpose, peel-off-and-apply identification

- Ideal for a wide range of labelling applications
- Includes two sizes that are pre-cut and pre-sized to fit heavy-duty rigid tags
- Indoor/Outdoor grade material

Diagram	Order Reference	Colour	Label Width A (mm)	Label Height B (mm)	Vertical Repeat D (mm)	Labels per Roll	Printer Ribbon Series
<b>B-595: Vinyl</b>							
	B30-242-595-BLNKWT	White	28.58	72.39	82.55	300	B30-R10000
	B30-219-595-BLNKWT	White	57.15	97.79	107.95	250	B30-R10000
	B30-241-595-BLNKYL	Yellow	57.15	76.20	82.55	300	B30-R10000
	B30-241-595-BLNKWT	White	76.20	57.15	82.55	300	B30-R10000
	B30-25-595-BLNKYL	Yellow	101.60	152.40	158.75	175	B30-R10000
	B30-25-595-BLNKWT	White	152.40	101.60	158.75	175	B30-R10000
<b>B-7569: Vinyl</b>							
	B30-242-7569-WT	White	28.58	72.00	82.55	300	B30-R10000
	B30-241-7569-WT	White	57.00	75.00	82.55	300	B30-R10000
	B30-219-7569-WT	White	57.00	98.00	107.95	250	B30-R10000
	B30-241-7569-YL	Yellow	57.00	75.00	82.55	300	B30-R10000
	B30-25-7569-WT	White	101.00	152.00	158.75	175	B30-R10000
	B30-25-7569-YL	Yellow	101.00	152.00	158.75	175	B30-R10000



### B-551 and B-851 Non-adhesive continuous tag stock

For safety, lockout and general purpose hanging tags

- Non-adhesive, polyester stock
- Hole punch available separately. Order reference: 020591
- Optional snap-in grommets available. Order Reference: 020596




Diagram	Order Reference	Colour	Label Width A (mm)	Label Height B (mm)	Label Length B (m)	Vertical Repeat D (mm)	Labels per Roll	Printer Ribbon Series
<b>B-551: Polyester</b>								
	B30C-2500-551-WT	White	63.50	-	15.24	-	1	B30-R10000
	B30C-3250-551-WT	White	82.55	-	15.24	-	1	B30-R10000
	B30C-4250-551-WT	White	107.19	-	15.24	-	1	B30-R10000
<b>B-851: Polyester</b>								
	B30-255-851-BL	Blue	82.55	146.05	-	158.75	100	B30-R10000
	B30-255-851-GN	Green	82.55	146.05	-	158.75	100	B30-R10000
	B30-255-851-OR	Orange	82.55	146.05	-	158.75	100	B30-R10000
	B30-255-851-RD	Red	82.55	146.05	-	158.75	100	B30-R10000
	B30-255-851-WT	White	82.55	146.05	-	158.75	100	B30-R10000
	B30-255-851-YL	Yellow	82.55	146.05	-	158.75	100	B30-R10000



## FACILITY AND SAFETY IDENTIFICATION



### B-584 Retro reflective tape

For Highly reflective identification that shines back brightly when struck by light

- Ideal for labelling outdoor utility poles and pedestals, jobsite equipment and roof-top equipment
- Recommended low light or inclement weather conditions




Diagram	Order Reference	Colour	Width A (mm)	Length B (m)	Recommended Ribbon
∞	B30C-1125-584-OR	Orange	28.58	15.24	B30-R10000
∞	B30C-1125-584-SL	Silver	28.58	15.24	B30-R10000
∞	B30C-1125-584-YL	Yellow	28.58	15.24	B30-R10000
∞	B30C-2250-584-OR	Orange	57.15	15.24	B30-R10000
∞	B30C-2250-584-SL	Silver	57.15	15.24	B30-R10000
∞	B30C-2250-584-YL	Yellow	57.15	15.24	B30-R10000
∞	B30C-4000-584-OR	Orange	101.60	15.24	B30-R10000
∞	B30C-4000-584-SL	Silver	101.60	15.24	B30-R10000
∞	B30C-4000-584-YL	Yellow	101.60	15.24	B30-R10000



### B-526 BradyGlo High-intensity photoluminescent tape

For glow-in-the dark identification - Up to 10 hours

- Designed for directional and evacuation marking
- Ideal for marking emergency utility shut-offs, fire extinguishers, alarm pulls and vital equipment controls




Diagram	Order Reference	Colour	Width A (mm)	Length B (m)	Recommended Ribbon
∞	B30C-1125-526	Photoluminescent Green	28.58	15.24	B30-R10000
∞	B30C-2250-526	Photoluminescent Green	57.15	15.24	B30-R10000
∞	B30C-4000-526	Photoluminescent Green	101.60	15.24	B30-R10000



### B-581 Repositionable vinyl

For 5S and lean applications

- Aggressive adhesive stays in place but removes cleanly without leaving adhesive residue
- Ideal for temporary, removable and repositionable labels, like 5S and lean inventory labels
- Service temp: -40 °C to 82 °C
- Application temp: 10 °C to 82 °C




Diagram	Order Reference	Colour	Width A (mm)	Length B (m)	Recommended Ribbon
∞	B30C-500-581-WT	White	12.70	30.48	B30-R10000
∞	B30C-500-581-YL	Yellow	12.70	30.48	B30-R10000
∞	B30C-1125-581-WT	White	28.58	30.48	B30-R10000
∞	B30C-1125-581-YL	Yellow	28.58	30.48	B30-R10000
∞	B30C-2250-581-WT	White	57.15	30.48	B30-R10000
∞	B30C-2250-581-YL	Yellow	57.15	30.48	B30-R10000
∞	B30C-4000-581-WT	White	101.60	30.48	B30-R10000
∞	B30C-4000-581-YL	Yellow	101.60	30.48	B30-R10000

## B-509 Printable magnetic supply

Easiest and quickest material for removing and repositioning

- Non-adhesive magnetic material that can be printed on directly
- Ideal for reusable and repositionable identification applications




Diagram	Order Reference	Colour	Width A (mm)	Length B (m)	Recommended Ribbon
∞	B30C-2500-509-WT	White	63.50	7.62	B30-R10000
∞	B30C-2500-509-YL	Yellow	63.50	7.62	B30-R10000
∞	B30C-4250-509-WT	White	107.95	7.62	B30-R10000
∞	B30C-4250-509-YL	Yellow	107.95	7.62	B30-R10000


## B-787 Polyvinyl fluoride tape

Ideal for applications where self-extinguishing properties are required

Polyvinyl fluoride (B-787) tape is ideal for label applications where self-extinguishing properties are required. Glossy white topcoated material with permanent acrylic adhesive. Meets the colour requirements of FED-STD-595C Colour 17875 White and complies with the requirements of Boeing BMS 10-26 Type I, Grade A



Diagram	Order Reference	Colour	Width A (mm)	Length B (m)	Recommended Ribbon
∞	B30C-4000-787	White	101.60	18.29	B30-R6000



## Toughstripe floor marking tape

Removable area marking tape

ToughStripe is the ideal floor marking tape in a lean environment where the regular application and replacement of floor marking is crucial.




Diagram	Order Reference	Colour	Width A (mm)	Length B (m)	Recommended Ribbon
∞	B30C-1125-483BL-KT	Blue	28.58	30.48	B30-R4400-WT
∞	B30C-1125-483GN-KT	Green	28.58	30.48	B30-R4400-WT
∞	B30C-1125-483RD-KT	Red	28.58	30.48	B30-R4400-WT
∞	B30C-1125-483WT-KT	White	28.58	30.48	B30-R6000
∞	B30C-1125-483YL-KT	Yellow	28.58	30.48	B30-R6000
∞	B30C-2250-483BK-KT	Black	57.15	30.48	B30-R4400-WT
∞	B30C-2250-483BL-KT	Blue	57.15	30.48	B30-R4400-WT
∞	B30C-2250-483GN-KT	Green	57.15	30.48	B30-R4400-WT
∞	B30C-2250-483OR-KT	Orange	57.15	30.48	B30-R6000
∞	B30C-2250-483RD-KT	Red	57.15	30.48	B30-R4400-WT
∞	B30C-2250-483WT-KT	White	57.15	30.48	B30-R6000
∞	B30C-2250-483YL-KT	Yellow	57.15	30.48	B30-R6000
∞	B30C-3000-483WT-KT	White	76.20	30.48	B30-R6000
∞	B30C-3000-483YL-KT	Yellow	76.20	30.48	B30-R6000
∞	B30C-4000-483BL-KT	Blue	101.60	30.48	B30-R4400-WT
∞	B30C-4000-483GN-KT	Green	101.60	30.48	B30-R4400-WT
∞	B30C-4000-483OR-KT	Orange	101.60	30.48	B30-R6000
∞	B30C-4000-483RD-KT	Red	101.60	30.48	B30-R4400-WT
∞	B30C-4000-483WT-KT	White	101.60	30.48	B30-R6000
∞	B30C-4000-483YL-KT	Yellow	101.60	30.48	B30-R6000

- Superior durability
- Easy application
- High visibility
- Die-Cut shapes
- Painless Removal



# FACILITY AND SAFETY IDENTIFICATION



## B-7569 Indoor/Outdoor vinyl

General purpose industrial vinyl for indoor/outdoor usage

- High gloss, durable and flexible identification material
- Adheres to difficult low surface energy materials
- Can handle up to 75°C, which meets industry maintenance temperatures
- Low-shrink vinyl




Diagram	Order Reference	Colour	Width A (mm)	Length B (m)	Recommended Ribbon
∞	B30C-500-7569-BK	Black	12.70	30.00	B30-R10000-WT
∞	B30C-500-7569-BL	Blue	12.70	30.00	B30-R10000-WT
∞	B30C-500-7569-GN	Green	12.70	30.00	B30-R10000-WT
∞	B30C-500-7569-OR	Orange	12.70	30.00	B30-R10000
∞	B30C-500-7569-RD	Red	12.70	30.00	B30-R10000-WT
∞	B30C-500-7569-WT	White	12.70	30.00	B30-R10000
∞	B30C-500-7569-YL	Yellow	12.70	30.00	B30-R10000
∞	B30C-1125-7569-BK	Black	29.00	30.00	B30-R10000-WT
∞	B30C-1125-7569-BL	Blue	29.00	30.00	B30-R10000-WT
∞	B30C-1125-7569-GN	Green	29.00	30.00	B30-R10000-WT
∞	B30C-1125-7569-OR	Orange	29.00	30.00	B30-R10000
∞	B30C-1125-7569-RD	Red	29.00	30.00	B30-R10000-WT
∞	B30C-1125-7569-WT	White	29.00	30.00	B30-R10000
∞	B30C-1125-7569-YL	Yellow	29.00	30.00	B30-R10000
∞	B30C-2250-7569-BK	Black	57.00	30.00	B30-R10000-WT
∞	B30C-2250-7569-BL	Blue	57.00	30.00	B30-R10000-WT
∞	B30C-2250-7569-GN	Green	57.00	30.00	B30-R10000-WT
∞	B30C-2250-7569-OR	Orange	57.00	30.00	B30-R10000
∞	B30C-2250-7569-RD	Red	57.00	30.00	B30-R10000-WT
∞	B30C-2250-7569-WT	White	57.00	30.00	B30-R10000
∞	B30C-2250-7569-YL	Yellow	57.00	30.00	B30-R10000
∞	B30C-3000-7569-WT	White	75.00	30.00	B30-R10000
∞	B30C-3000-7569-YL	Yellow	75.00	30.00	B30-R10000
∞	B30C-4000-7569-BK	Black	101.00	30.00	B30-R10000-WT
∞	B30C-4000-7569-BL	Blue	101.00	30.00	B30-R10000-WT
∞	B30C-4000-7569-GN	Green	101.00	30.00	B30-R10000-WT
∞	B30C-4000-7569-OR	Orange	101.00	30.00	B30-R10000
∞	B30C-4000-7569-RD	Red	101.00	30.00	B30-R10000-WT
∞	B30C-4000-7569-WT	White	101.00	30.00	B30-R10000
∞	B30C-4000-7569-YL	Yellow	101.00	30.00	B30-R10000



## B-549 Cold temperature application material

For identification in temperature as cold as -40°C

- Special adhesive permanently adheres to extremely cold surfaces
- Ideal for cold storage warehouses, fridges, freezers and short-term outdoor use in winter
- Service temp: -40 °C to 100 °C
- Application temp: -23 °C to 100 °C




Diagram	Order Reference	Colour	Width A (mm)	Length B (m)	Recommended Ribbon
∞	B30C-1125-549-WT	White	28.58	30.48	B30-R10000
∞	B30C-1125-549-YL	Yellow	28.58	30.48	B30-R10000
∞	B30C-2250-549-WT	White	57.15	30.48	B30-R10000
∞	B30C-2250-549-YL	Yellow	57.15	30.48	B30-R10000
∞	B30C-4000-549-WT	White	101.60	30.48	B30-R10000
∞	B30C-4000-549-YL	Yellow	101.60	30.48	B30-R10000

## B-461, B-490, B-492, B-498 & B-499 Vial & tube labels

Always have clear, legible specimen samples

- Labels are designed to withstand extreme laboratory environments
- Resistant to laboratory solvents like Xylene, ethanol, alcohol and DMSO
- Identification is always legible – and will not smear, fade or fall off
- B-490, can be applied to frozen surfaces including glass and polypropylene stored in liquid nitrogen. Material must slightly overlap itself
- B-492, can be applied to frozen surfaces including glass and polypropylene stored in liquid nitrogen




Diagram	Material	Special Properties	Label Width A (mm)	Label Height B (mm)	Diameter C (mm)	Printable Area Width PW (mm)	Printable Area Height PH (mm)	Order Reference	Printer Ribbon Series	Labels per Roll
<b>0.5 mL</b>										
●	B-499	<b>F A</b>	12.70	19.05	-	-	-	B33-68-499	B30-R4300	1500
●	B-498	<b>F R</b>	12.70	19.05	-	-	-	B33-68-498	B30-R6200	5000
●	B-490	<b>F H L</b>	12.70	19.05	-	-	-	B33-68-490	B30-R4300	2500
▲	B-499	<b>F A</b>	12.70	25.40	-	-	-	B33-620-499	B30-R6000	1000
●	B-499	<b>F A</b>	12.70	25.40	-	-	-	B33-611-499	B30-R6000	3000
▲	B-499	<b>F A</b>	22.86	12.70	-	-	-	B33-125-499	B30-R4300	1500
▲	B-490	<b>F H L</b>	22.86	12.70	-	-	-	B33-125-490	B30-R4300	1650
⊕	B-499	<b>F A</b>	22.86	12.70	12.70	-	-	B33-126-499	B30-R4300	1500
⊕	B-490	<b>F H L</b>	22.86	12.70	12.70	-	-	B33-126-490	B30-R4300	2500
●	B-499	<b>F A</b>	25.40	9.53	-	-	-	B33-152-499	B30-R4300	1500
●	B-492	<b>F H L</b>	25.40	9.53	-	-	-	B33-152-492	B30-R6400	2500
⊕	B-499	<b>F A</b>	25.40	9.53	9.53	-	-	B33-163-499	B30-R4300	1500
⊕	B-492	<b>F H L</b>	25.40	9.53	9.53	-	-	B33-163-492	B30-R6400	1500
◆	B-461	<b>F A H S L</b>	25.40	9.53	9.53	25.40	9.53	B33-606-461	B30-R4300	1000
▲	B-499	<b>F A</b>	25.40	12.45	-	-	-	B33-659-499	B30-R6000	1000
▲	B-492	<b>F H L</b>	25.40	12.70	-	-	-	B33-59-492	B30-R6400	2500
●	B-499	<b>F A</b>	25.40	12.70	-	-	-	B33-5-499	B30-R6000	5000
⊕	B-492	<b>F H L</b>	25.40	12.70	9.53	-	-	B33-181-492	B30-R6400	1500
⊕	B-492	<b>F H L</b>	25.40	12.70	11.18	-	-	B33-182-492	B30-R6400	1500
◆	B-461	<b>F A H S L</b>	55.88	12.70	-	19.05	12.70	B33-127-461	B30-R4300	1500
<b>1.5 mL</b>										
●	B-499	<b>F A</b>	19.05	6.35	-	-	-	B33-1-499	B30-R6000	10000
▲	B-499	<b>F A</b>	19.05	19.05	-	-	-	B33-254-499	B30-R6000	1000
●	B-499	<b>F A</b>	19.05	23.80	-	-	-	B33-91-499	B30-R6000	2500
●	B-499	<b>F A</b>	25.40	19.05	-	-	-	B33-88-499	B30-R6000	2500
▷	B-461	<b>F A H S L</b>	66.68	15.24	-	25.40	15.24	B33-153-461	B30-R4300	1500
<b>2.0 mL</b>										
●	B-499	<b>F A</b>	6.35	36.50	-	-	-	B33-90-499	B30-R6000	2500
◆	B-461	<b>F A H S L</b>	15.24	38.10	-	15.24	33.02	B33-628-461	B30-R4300	2500
◆	B-461	<b>F A H S L</b>	15.24	66.68	-	15.24	25.40	B33-612-461	B30-R4300	1500
▲	B-492	<b>F H L</b>	22.86	25.40	-	-	-	B33-180-492	B30-R6400	1500
▲	B-492	<b>F H L</b>	25.40	25.40	-	-	-	B33-179-492	B30-R6400	1900
▷	B-461	<b>F A H S L</b>	44.45	25.40	-	25.40	25.40	B33-183-461	B30-R4300	2000
<b>4.0 mL</b>										
●	B-499	<b>F A</b>	12.70	36.50	-	-	-	B33-87-499	B30-R6000	2500
▷	B-461	<b>F A H S L</b>	15.24	48.26	-	15.24	39.88	B33-638-461	B30-R4300	2000
●	B-499	<b>F A</b>	25.40	36.50	-	-	-	B33-621-499	B30-R6000	3000
●	B-499	<b>F A</b>	25.40	36.50	-	-	-	B33-89-499	B30-R6000	2300
▷	B-461	<b>F A H S L</b>	34.93	45.72	-	34.93	39.88	B33-632-461	B30-R4300	1500
▲	B-492	<b>F H L</b>	41.28	15.24	-	-	-	B33-155-492	B30-R6400	1500
▲	B-490	<b>F H L</b>	41.28	15.24	-	-	-	B33-155-490	B30-R4300	1500
◆	B-461	<b>F A H S L</b>	41.28	15.24	-	25.40	15.24	B33-133-461	B30-R4300	1500
⊕	B-492	<b>F H L</b>	41.28	15.24	9.53	-	-	B33-190-492	B30-R6400	1500
○	B-461	<b>F A H S L</b>	41.28	15.24	12.70	41.28	15.24	B33-608-461	B30-R4300	1000

>>

**F** Freezer environment **N** Liquid nitrogen environment **A** Autoclave environment **H** Hot water bath (100°C) **S** Self-laminating label **L** Low-profile (extremely thin) label **R** Removable

# LABORATORY IDENTIFICATION


## B-461, B-490, B-492, B-498 & B-499 Vial & tube labels (Continued)

Always have clear, legible specimen samples

Diagram	Material	Special Properties	Label Width A (mm)	Label Height B (mm)	Diameter C (mm)	Printable Area Width PW (mm)	Printable Area Height PH (mm)	Order Reference	Printer Ribbon Series	Labels per Roll
▲	B-490	<b>F</b> <b>H</b> <b>L</b>	50.80	6.35	-	-	-	B33-151-490	B30-R4300	2500
◆	B-461	<b>F</b> <b>A</b> <b>H</b> <b>S</b> <b>L</b>	66.68	25.40	-	25.40	25.40	B33-276-461	B30-R4300	1500
◇	B-461	<b>F</b> <b>A</b> <b>H</b> <b>S</b> <b>L</b>	88.90	38.10	-	31.75	38.10	B33-134-461	B30-R4300	1000
<b>8.0 mL</b>										
●	B-498	<b>F</b> <b>R</b>	19.05	23.80	-	-	-	B33-91-498	B30-R6200	2500
●	B-498	<b>F</b> <b>R</b>	25.40	19.05	-	-	-	B33-88-498	B30-R6200	2500
●	B-499	<b>F</b> <b>A</b>	25.40	66.68	-	-	-	B33-625-499	B30-R6000	1500
▲	B-492	<b>F</b> <b>H</b> <b>L</b>	48.26	25.40	-	-	-	B33-156-492	B30-R6400	1500
▲	B-490	<b>F</b> <b>H</b> <b>L</b>	48.26	25.40	-	-	-	B33-156-490	B30-R4300	1500
<b>15.0 mL</b>										
▲	B-490	<b>F</b> <b>H</b> <b>L</b>	55.88	38.10	-	-	-	B33-157-490	B30-R4300	1000
◆	B-461	<b>F</b> <b>A</b> <b>H</b> <b>S</b> <b>L</b>	133.35	25.40	-	38.10	25.40	B33-139-461	B30-R4300	650
<b>25.0 mL</b>										
●	B-498	<b>F</b> <b>R</b>	12.70	36.50	-	-	-	B33-87-498	B30-R6200	2500
●	B-499	<b>F</b> <b>A</b>	25.40	63.50	-	-	-	B33-325-499	B30-R6000	700
<b>50.0 mL</b>										
▲	B-498	<b>F</b> <b>R</b>	19.05	19.05	-	-	-	B33-254-498	B30-R6200	1000
●	B-498	<b>F</b> <b>R</b>	25.40	12.70	-	-	-	B33-5-498	B30-R6200	5000
●	B-498	<b>F</b> <b>R</b>	25.40	36.50	-	-	-	B33-89-498	B30-R6200	2300
●	B-498	<b>F</b> <b>R</b>	25.40	63.50	-	-	-	B33-325-498	B30-R6200	700
●	B-499	<b>F</b> <b>A</b>	25.40	101.60	-	-	-	B33-326-499	B30-R6000	450
●	B-498	<b>F</b> <b>R</b>	25.40	101.60	-	-	-	B33-326-498	B30-R6200	450
●	B-499	<b>F</b> <b>A</b>	38.10	101.60	-	-	-	B33-327-499	B30-R6000	450
●	B-498	<b>F</b> <b>R</b>	38.10	101.60	-	-	-	B33-327-498	B30-R6200	450
●	B-499	<b>F</b> <b>A</b>	38.10	152.40	-	-	-	B33-328-499	B30-R6000	300
●	B-498	<b>F</b> <b>R</b>	38.10	152.40	-	-	-	B33-328-498	B30-R6200	300



### B-461, B-490 & B-492 Centrifuge, eppendorf & PCR tube labels



Stays put in harsh conditions and resist common laboratory chemicals

- Thin construction that prevents jamming in centrifuges and racks
- Long and short tails styles provide window for viewing liquids level in tube
- B-490 can be applied to frozen surfaces including glass and polypropylene stored in liquid nitrogen. Material must slightly overlap itself
- B-492 can be applied to frozen surfaces including glass and polypropylene stored in liquid nitrogen




Diagram	Material	Special Properties	Label Width A (mm)	Label Height B (mm)	Printable Area Width PW (mm)	Printable Area Height PH (mm)	Order Reference	Printer Ribbon Series	Labels per Roll	
<b>0.5 mL</b>										
▷	B-461	<b>F</b> <b>N</b> <b>A</b> <b>H</b> <b>S</b> <b>L</b>	5.08	22.86	5.08	18.29	B33-614-461	B30-R4300	2000	
▷	B-461	<b>F</b> <b>N</b> <b>A</b> <b>H</b> <b>S</b> <b>L</b>	6.35	27.94	6.35	22.09	B33-627-461	B30-R4300	1000	
●	B-490	<b>F</b> <b>N</b> <b>H</b> <b>L</b>	12.70	19.05	-	-	B33-68-490	B30-R4300	2500	
●	B-492	<b>F</b> <b>N</b> <b>H</b> <b>L</b>	25.40	9.53	-	-	B33-152-492	B30-R6400	2500	
▷	B-461	<b>F</b> <b>N</b> <b>A</b> <b>H</b> <b>S</b> <b>L</b>	45.72	12.70	19.05	12.70	B33-122-461	B30-R4300	1500	
◆	B-461	<b>F</b> <b>N</b> <b>A</b> <b>H</b> <b>S</b> <b>L</b>	55.88	12.70	19.05	12.70	B33-127-461	B30-R4300	1500	
<b>1.5 mL</b>										
▲	B-490	<b>F</b> <b>N</b> <b>H</b> <b>L</b>	31.75	9.53	-	-	B33-154-490	B30-R4300	1500	
▷	B-461	<b>F</b> <b>N</b> <b>A</b> <b>H</b> <b>S</b> <b>L</b>	45.72	9.53	19.05	9.53	B33-123-461	B30-R4300	1500	
▷	B-461	<b>F</b> <b>N</b> <b>A</b> <b>H</b> <b>S</b> <b>L</b>	66.68	15.24	25.40	15.24	B33-153-461	B30-R4300	1500	
<b>4.0 mL</b>										
▲	B-492	<b>F</b> <b>N</b> <b>H</b> <b>L</b>	41.28	15.24	-	-	B33-155-492	B30-R6400	1500	
▲	B-490	<b>F</b> <b>N</b> <b>H</b> <b>L</b>	41.28	15.24	-	-	B33-155-490	B30-R4300	1500	

## B-461, B-490, B-492 & B-499 Conical / Large tube labels

Use these labels for labelling larger tube sizes, while still providing the needed temperature and chemical resistance properties

- B-490 can be applied to frozen surfaces including glass and polypropylene stored in liquid nitrogen. Material must slightly overlap itself
- B-492 can be applied to frozen surfaces including glass and polypropylene stored in liquid nitrogen

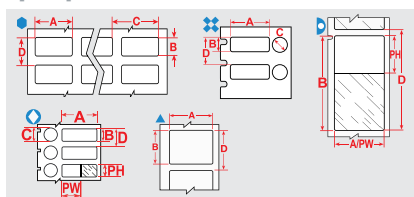


Diagram	Material	Special Properties	Label Width A (mm)	Label Height B (mm)	Diameter C (mm)	Printable Area Width PW (mm)	Printable Area Height PH (mm)	Order Reference	Printer Ribbon Series	Labels per Roll
<b>0.5 mL</b>										
●	B-499	F A	12.70	19.05	-	-	-	B33-68-499	B30-R4300	1500
▲	B-499	F A	12.70	25.40	-	-	-	B33-620-499	B30-R6000	1000
▲	B-499	F A	22.86	12.70	-	-	-	B33-125-499	B30-R4300	1500
⊕	B-499	F A	22.86	12.70	12.70	-	-	B33-126-499	B30-R4300	1500
●	B-499	F A	25.40	9.53	-	-	-	B33-152-499	B30-R4300	1500
●	B-492	F H L	25.40	9.53	-	-	-	B33-152-492	B30-R6400	2500
▲	B-492	F H L	25.40	12.70	-	-	-	B33-59-492	B30-R6400	2500
●	B-499	F A	25.40	12.70	-	-	-	B33-5-499	B30-R6000	5000
●	B-461	F A H S L	55.88	12.70	-	19.05	12.70	B33-127-461	B30-R4300	1500
<b>1.5 mL</b>										
▲	B-499	F A	19.05	19.05	-	-	-	B33-254-499	B30-R6000	1000
●	B-499	F A	19.05	23.80	-	-	-	B33-91-499	B30-R6000	2500
●	B-499	F A	25.40	19.05	-	-	-	B33-88-499	B30-R6000	2500
<b>2.0 mL</b>										
●	B-461	F A H S L	15.24	38.10	-	15.24	33.02	B33-628-461	B30-R4300	2500
●	B-461	F A H S L	15.24	66.68	-	15.24	25.40	B33-612-461	B30-R4300	1500
●	B-461	F A H S L	19.05	38.10	-	19.05	33.02	B33-629-461	B30-R4300	2500
▲	B-492	F H L	25.40	25.40	-	-	-	B33-179-492	B30-R6400	1900
<b>4.0 mL</b>										
●	B-499	F A	12.70	36.50	-	-	-	B33-87-499	B30-R6000	2500
●	B-461	F A H S L	15.24	48.26	-	15.24	39.88	B33-638-461	B30-R4300	2000
●	B-499	F A	20.32	36.50	-	-	-	B33-165-499	B30-R4300	2500
●	B-499	F A	25.40	36.50	-	-	-	B33-621-499	B30-R6000	3000
●	B-499	F A	25.40	36.50	-	-	-	B33-89-499	B30-R6000	2300
●	B-461	F A H S L	34.93	45.72	-	34.93	39.88	B33-632-461	B30-R4300	1500
▲	B-499	F A	38.10	19.05	-	-	-	B33-136-499	B30-R4300	1500
▲	B-492	F H L	41.28	15.24	-	-	-	B33-155-492	B30-R6400	1500
▲	B-490	F H L	41.28	15.24	-	-	-	B33-155-490	B30-R4300	1500
●	B-461	F A H S L	41.28	15.24	-	25.40	15.24	B33-133-461	B30-R4300	1500
⊕	B-492	F H L	41.28	15.24	9.53	-	-	B33-190-492	B30-R6400	1500
●	B-461	F A H S L	41.28	15.24	12.70	41.28	15.24	B33-608-461	B30-R4300	1000
▲	B-490	F H L	50.80	6.35	-	-	-	B33-151-490	B30-R4300	2500
●	B-461	F A H S L	66.68	25.40	-	25.40	25.40	B33-276-461	B30-R4300	1500
●	B-461	F A H S L	88.90	38.10	-	31.75	38.10	B33-134-461	B30-R4300	1000
<b>8.0 mL</b>										
●	B-499	F A	25.40	66.68	-	-	-	B33-625-499	B30-R6000	1500
▲	B-492	F H L	48.26	25.40	-	-	-	B33-156-492	B30-R6400	1500
▲	B-461	F A H L	48.26	25.40	-	48.26	-	B33-636-461AW	B30-R4300	2000
▲	B-499	F A	50.80	25.40	-	-	-	B33-137-499	B30-R4300	1100
<b>15.0 mL</b>										
●	B-461	F A H S L	133.35	25.40	-	38.10	25.40	B33-139-461	B30-R4300	650
<b>25.0 mL</b>										
●	B-499	F A	25.40	63.50	-	-	-	B33-325-499	B30-R6000	700
▲	B-461	F A H L	57.15	19.05	-	57.15	-	B33-642-461AW	B30-R4300	2000
▲	B-461	F A H L	88.90	38.10	-	88.90	-	B33-650-461AW	B30-R4300	2000
<b>50.0 mL</b>										
●	B-499	F A	25.40	101.60	-	-	-	B33-326-499	B30-R6000	450
●	B-499	F A	38.10	101.60	-	-	-	B33-327-499	B30-R6000	450
●	B-499	F A	38.10	152.40	-	-	-	B33-328-499	B30-R6000	300
▲	B-490	F H L	95.25	38.10	-	-	-	B33-158-490	B30-R4300	1000

\*AW = All white / no transparent area

# LABORATORY IDENTIFICATION



## B-461, B-490, B-492 & B-499 Vial top labels

Identify the tops of your tubes with these circular labels, or use the combined vial and vial top labels

- B-490 can be applied to frozen surfaces including glass and polypropylene stored in liquid nitrogen. Material must slightly overlap itself
- B-492 can be applied to frozen surfaces including glass and polypropylene stored in liquid nitrogen.

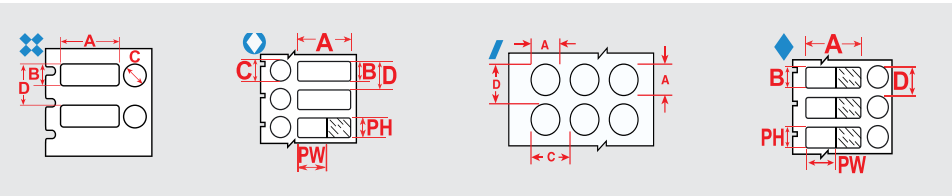


Diagram	Material	Special Properties	Label Width A (mm)	Label Height B (mm)	Diameter C (mm)	Printable Area Width PW (mm)	Printable Area Height PH (mm)	Order Reference	Printer Ribbon Series	Labels per Roll
<b>0.5 mL</b>										
❖	B-499	<b>F A</b>	22.86	12.70	12.70	-	-	B33-126-499	B30-R4300	1500
❖	B-490	<b>F H L</b>	22.86	12.70	12.70	-	-	B33-126-490	B30-R4300	2500
❖	B-499	<b>F A</b>	25.40	9.53	9.53	-	-	B33-163-499	B30-R4300	1500
❖	B-492	<b>F H L</b>	25.40	9.53	9.53	-	-	B33-163-492	B30-R6400	1500
◆	B-461	<b>F A H S L</b>	25.40	9.53	9.53	25.40	9.53	B33-606-461	B30-R4300	1000
❖	B-492	<b>F H L</b>	25.40	12.70	11.18	-	-	B33-182-492	B30-R6400	1500
<b>1.5 mL</b>										
/	B-499	<b>F A</b>	-	-	9.53	-	-	B33-602-499	B30-R6000	3000
/	B-499	<b>F A</b>	-	-	9.53	-	-	B33-602-499YL	B30-R6000	3000
/	B-461	<b>F A H L</b>	-	-	9.53	-	-	B33-602-461AW	B30-R4300	3000
/	B-499	<b>F A</b>	-	-	9.53	-	-	B33-143-499	B30-R4300	1500
/	B-492	<b>F H L</b>	-	-	9.53	-	-	B33-143-492	B30-R6400	1500
<b>2.0 mL</b>										
/	B-499	<b>F A</b>	-	-	12.70	-	-	B33-603-499	B30-R6000	3000
/	B-499	<b>F A</b>	-	-	12.70	-	-	B33-603-499YL	B30-R6000	3000
/	B-499	<b>F A</b>	-	-	12.70	-	-	B33-144-499	B30-R4300	1500
/	B-492	<b>F H L</b>	-	-	12.70	-	-	B33-144-492	B30-R6400	1500
/	B-490	<b>F H L</b>	-	-	12.70	-	-	B33-144-490	B30-R4300	2500
<b>4.0 mL</b>										
❖	B-492	<b>F H L</b>	41.28	15.24	9.53	-	-	B33-190-492	B30-R6400	1500
○	B-461	<b>F A H S L</b>	41.28	15.24	12.70	41.28	15.24	B33-608-461	B30-R4300	1000
<b>15.0 mL</b>										
/	B-461	<b>F A H L</b>	-	-	15.24	-	-	B33-604-461AW	B30-R4300	3000



## B-7425 Polypropylene labels

Track almost any sample in the lab

- Offers excellent all-purpose sample traceability
- Stays attached to vials, tubes, slides and well plates
- Remains legible when exposed to chemicals and extreme temperatures

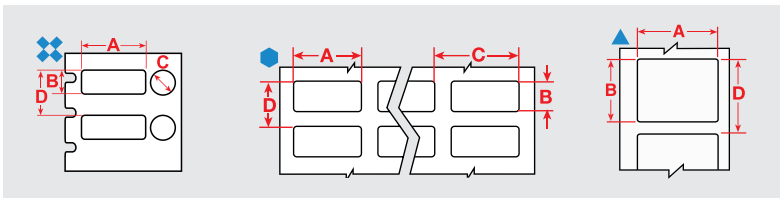


Diagram	Material	Special Properties	Label Width A (mm)	Label Height B (mm)	Diameter C (mm)	Order Reference	Printer Ribbon Series	Labels per Roll
-								
▲	B-7425	<b>F A H</b>	50.80	12.70	-	B33-53-7425	B30-R4300	2000
<b>0.5 mL</b>								
●	B-7425	<b>F A H</b>	25.40	9.53	-	B33-152-7425	B30-R4300	2000
⊘	B-7425	<b>F A H</b>	25.40	9.53	9.53	B33-249-7425	B30-R4300	1500
▲	B-7425	<b>F A H</b>	25.40	12.70	-	B33-59-7425	B30-R4300	2000
⊘	B-7425	<b>F A H</b>	25.40	12.70	11.18	B33-251-7425	B30-R4300	1500
<b>1.5 mL</b>								
●	B-7425	<b>F A H</b>	25.40	19.05	-	B33-88-7425	B30-R4300	2000
<b>2.0 mL</b>								
▲	B-7425	<b>F A H</b>	20.96	6.35	-	B33-257-7425	B30-R4300	1500
▲	B-7425	<b>F A H</b>	25.40	25.40	-	B33-179-7425	B30-R4300	1500
▲	B-7425	<b>F A H</b>	33.02	15.24	-	B33-256-7425	B30-R4300	1500
<b>4.0 mL</b>								
●	B-7425	<b>F A H</b>	38.10	12.70	-	B33-37-7425	B30-R4300	1500
▲	B-7425	<b>F A H</b>	38.10	19.05	-	B33-136-7425	B30-R4300	1500
▲	B-7425	<b>F A H</b>	38.10	25.40	-	B33-235-7425	B30-R4300	1250
▲	B-7425	<b>F A H</b>	38.10	44.45	-	B33-258-7425	B30-R4300	900
▲	B-7425	<b>F A H</b>	50.80	6.35	-	B33-151-7425	B30-R4300	2000
<b>8.0 mL</b>								
▲	B-7425	<b>F A H</b>	50.80	25.40	-	B33-137-7425	B30-R4300	1500

## B-7425-AC Sterilisation indicating labels

Label confirms successful sterilisation




Diagram	Material	Special Properties	Label Width A (mm)	Label Height B (mm)	Printable Area Width PW (mm)	Order Reference	Printer Ribbon Series	Labels per Roll
<b>4.0 mL</b>								
▲	B-7425		38.10	25.40	38.10	B33-235-7425-AC	B30-R4300	1250
<b>8.0 mL</b>								
▲	B-7425		50.80	25.40	50.80	B33-137-7425-AC	B30-R4300	1500

# LABORATORY IDENTIFICATION



## B-488 Well plate labels

Our well plate labels guarantee crystal clear text and barcoding for most laboratory environments

- Chemically-resistant polyester made to fit common well plate sizes


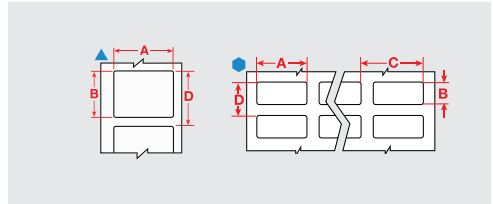



Diagram	Material	Special Properties	Label Width A (mm)	Label Height B (mm)	Order Reference	Printer Ribbon Series	Labels per Roll
●	B-488	<b>F</b> <b>A</b>	22.86	19.05	B33-616-488	M61-R4300	3000
●	B-488	<b>F</b> <b>A</b>	22.86	22.86	B33-617-488	M61-R4300	3000
▲	B-488	<b>F</b> <b>A</b>	48.26	6.35	B33-635-488	M61-R4300	2000



## B-498 Re-Identify Tissue Cassettes Labels

Tissue cassettes are often re-identified when labs collect samples from various biorepositories. Typically, each laboratory has its own unique way of identifying samples, which creates a need to re-identify samples in a common way. Brady B-498 post-process labels can be applied directly onto the cassettes, on pure paraffin wax and on top of another label or identifier.

Diagram	Material	Special Properties	Label Width A (mm)	Label Height B (mm)	Order Reference	Printer Ribbon Series	Labels per Roll
●	B-498	<b>F</b> <b>R</b>	19.05	6.35	B33-1-498	B30-R6200	5000
▲	B-498	<b>F</b> <b>R</b>	19.05	19.05	B33-254-498	B30-R6200	1000



## B-481 & B-488 Slide labels

Designed to provide crisp and clear sample identification throughout the sample generation, inspection and storage process

- Resistant to xylene, alcohol and DMSO

Diagram	Material	Special Properties	Label Width A (mm)	Label Height B (mm)	Order Reference	Printer Ribbon Series	Labels per Roll
▲	B-481	<b>F</b> <b>H</b>	22.86	9.53	B33-195-481	B30-R6400	3000
●	B-488	<b>F</b> <b>A</b>	22.86	19.05	B33-616-488	B30-R4300	3000
▲	B-481	<b>F</b> <b>H</b>	22.86	19.05	B33-194-481	B30-R6400	2000
●	B-488	<b>F</b> <b>A</b>	22.86	22.86	B33-617-488	B30-R4300	3000
●	B-481	<b>F</b> <b>H</b>	22.86	22.86	B33-141-481	B30-R6400	1500
▲	B-488	<b>F</b> <b>A</b>	48.26	6.35	B33-635-488	B30-R4300	2000



## B-427 Straw labelling

These self-laminating labels protect the printed information for lasting identification




Diagram	Material	Special Properties	Label Width A (mm)	Label Height B (mm)	Printable Area Width PW (mm)	Printable Area Height PH (mm)	Order Reference	Printer Ribbon Series	Labels per Roll
<b>0.3 mL Straw</b>									
●	B-427	<b>F N S</b>	25.40	25.40	25.40	9.53	B33-116-427	B30-R4300	2500
●	B-427	<b>F N S</b>	25.40	25.40	25.40	9.65	B33-211-427	B30-R4300	3000
●	B-427	<b>F N S</b>	25.40	31.75	25.40	12.70	B33-117-427	B30-R4300	2000
▷	B-427	<b>F N S</b>	44.45	38.10	44.45	12.70	B33-121-427	B30-R4300	1000
<b>0.5 mL</b>									
●	B-427	<b>F N S</b>	25.40	63.50	25.40	19.05	B33-511-427	B30-R4300	1500

## B-488 Bottles, flasks, dishes and general identification

Used to identify a variety of common laboratory glassware items and other consumables




Diagram	Material	Special Properties	Label Width A (mm)	Label Height B (mm)	Order Reference	Printer Ribbon Series	Labels per Roll
●	B-488	<b>F A</b>	22.86	19.05	B33-616-488	M61-R4300	3000
●	B-488	<b>F A</b>	22.86	22.86	B33-617-488	M61-R4300	3000
▲	B-488	<b>F A</b>	48.26	6.35	B33-635-488	M61-R4300	2000

## B-403 Water dissolvable label

The label dissolves within 30 seconds exposure to water




Diagram	Material	Special Properties	Label Width A (mm)	Label Length B (m)	Order Reference	Printer Ribbon Series	Labels per Roll
∞	B-403	<b>R</b>	28.58	30.48	B30C-1125-403-WT	M61-R4300	1
∞	B-403	<b>R</b>	57.15	30.48	B30C-2250-403-WT	M61-R4300	1
∞	B-403	<b>R</b>	76.20	30.48	B30C-3000-403-WT	M61-R4300	1
∞	B-403	<b>R</b>	101.60	30.48	B30C-4000-403-WT	M61-R4300	1

# LABEL CREATION

## for how you work best



Experience ultimate flexibility in label creation with the BradyPrinter i5300. Whether you are at a dedicated workstation or on the move, we provide the tools to get the job done efficiently. Choose between our comprehensive desktop software or our intuitive mobile app to design and print high-performance labels whenever and wherever you need them.

### Brady Workstation Labelling Software

Get everything you need to create the right label fast.

Whether you are designing complex sequences or simple facility signs, Brady Workstation streamlines the process from start to finish.



**Driverless & Automated:** Skip the driver installations. With auto-label setup and printer detection, you can start typing and printing immediately.



**Compliance & Safety:** Purpose-built apps allow you to design CLP-chemical labels, print lockout/tagout procedures, and create professional facility signs.



**Custom Design & Control:** Create custom templates, lock specific elements for consistency, and easily set up complex label sequences or data imports.



**Specialised ID:** From text-only cable wraps to high-volume asset identification, choose the specific suite that fits your facility's needs.

### Express Labels Mobile App

The BradyPrinter i5300 paired with Express Labels mobile app provides a seamless on-demand experience for maximum on-site efficiency.



**Intuitive Touch Interface:** Use familiar touchscreen gestures and 10+ industry-specific design guides to create professional labels in seconds—no PC required.



**Seamless Connectivity:** Connect up to five mobile devices to a single i5300 via Wi-Fi or Bluetooth, allowing your entire team to print high-performance labels from the field.



**Advanced Data Entry:** Minimise manual typing by using BradyVoice™ voice-to-text technology or the Image-to-Text feature to turn photos of text into editable label data.



**Integrated Workflows:** Easily import data from spreadsheets, access files via cloud storage (Google Drive, Dropbox), and create complex serialization sequences on the go.

Download the app for free



## BRADYPRINTER i5300 SPECIFICATIONS

PRINTER	
Description	BradyPrinter i5300 Industrial Label Printer
Includes	This i5300 Industrial Label Printer comes in a cardboard box. It ships with a Brady WorkStation Basic Design Suite, a Power Cable, a USB Cable, a Stylus, a cleaning kit, a QuickStart Guide, a Jump drive with How To Videos and 3rd Party Win Driver.
Applications	Wire and cable labelling, Circuit board labelling, Barcode labelling, Laboratory labelling, Electrical labelling, Data and telecommunications labelling, Component and equipment labelling, Pipe and valve marking, Facility identification, Asset tracking, General identification, Solar Panel labelling
Print Resolution (dpi)	300 / 600
Print Speed (mm/sec)	254.00
Stand-alone Printing (Detached from PC)	Peripheral
Internal Memory Capacity	512 MB RAM, 195 MB IFFS Flash
Colour Capability	Monocolour
Language Support	Bahasa (Indonesian), Bahasa Malay, Bulgarian, Chinese (Traditional & Simplified), Croatian, Czech, Danish, Dutch, English (US), Estonian, Finnish, French (Canada), German, Hungarian, Japanese, Korean, Norwegian (Bokmål), Polish, Portuguese, Romanian, Russian, Slovak, Spanish (Universal), Thai, Turkish, Vietnamese
Weight (kg)	15.0
Width x Height x Depth (mm)	284.48 x 279.40 x 401.32
Calibration	No
Operating Temperature	10°C - 40°C
Operating Humidity	10%-85% (RH non-condensing)
Storage Temperature	-20°C - 50°C
Storage Humidity	15%-90% (RH non-condensing)
Warranty	2 years
MEDIA	
Continuous vs Die-cut Labels	Continuous Die-cut
Compatible Media	B30-, B30C-, B30EP-, B33-, B33C-, B33D-, B33FP-, B33FT-, B33R-
Custom Labels	Yes
Number of Stock Parts	1200+ standard parts
Materials Supported	Direct Thermal Paper, FreezerBondz™ Polyester, Heat-shrink Polyolefin, High Temperature Heat-shrink Polyvinylidene Fluoride Sleeve, Magnetic Polyester, Metal-detectable Polyester, Metallic, Non-metal Polyester, Metallised Polyester, Metallised Polyester with Polyester Overlaminates, Nylon Cloth, Paper, Phosphorescent Polyester, Polyester, Polyester with Polyester Overlaminates, Polyimide, Polyolefin, Polypropylene, Polyvinylfluoride, Reflective Tape, Self-laminating Polyester, Self-laminating Vinyl, StainerBondz™ Polyester, Static Dissipative Polyester, Tamper-evident Metallised Polyester, Vinyl, Vinyl Cloth
Max. Label Width (mm)	107.95
Min. Label Width (mm)	6.35
Max. Liner Width (mm)	107.95
Min. Liner Width (mm)	18.03
Max. Print Width (mm)	101.98
Recommended Usage per Day	5000

POWER SUPPLY	
Power Supply	AC Adaptor
Power Supply Voltage	100 - 240 V @ 50 - 60 Hz
DISPLAY	
Display	Colour LCD Touchscreen
Display Resolution	1024 x 800 pixels
On Screen Indicators	Ribbon and label part number recognition, Supply Remaining, Data Reception, Ethernet Status, WiFi, Error Messaging
SOFTWARE & CONNECTIVITY	
Connectivity Options	Cabled, Ethernet, USB 2.0, USB Host, Bluetooth, Wi-Fi
Software Compatibility	Brady Workstation, Windows based driver for 3rd party software use
Programming Language	BPL (Brady Programming Language)
FONTS/GRAPHICS/SYMBOLOGIES	
Built-in Fonts	Arial, Courier New, Tahoma, Times New Roman, Trebuchet MS, Verdana, TrueType fonts storable to printer
Bar Code Type	Codabar, Code 128A, Code 128B, Code 128C, Code 39, Code 93, EAN-13, EAN-8, HIBC, Interleaved 2 of 5, JAN-8, JAN-8, MSI, Plessey, UPC-A, Aztec, Data Matrix, PDF417, QR code



\* General volume levels for directional model comparison purposes only. Assumes basic text on 1"x2" vinyl labels. Actual results vary depending on combination of material, burn and speed settings, label content, ambient temperature and length of print run.

\*\* User should test to the application. Print performance on small parts or parts smaller than a printer's minimum label dimension spec is dependent on multiple factors including print speed, quantity in print run, heat setting, and the size/layout of the printed elements. Windows® is a registered trademark of Microsoft Corporation.

▶ Learn more about the  
BradyPrinter i5300 on  
[www.bradyeurope.com/i5300](http://www.bradyeurope.com/i5300)





**Belgium & Luxembourg**  
+32 (0) 52 45 78 11  
benelux@bradycorp.com

**Czech Republic**  
+420 776 302 229  
czechrepublic@bradycorp.com

**Denmark**  
+45 66 14 44 00  
denmark@bradycorp.com

**France**  
+33 (0) 3 20 76 94 48  
france@bradycorp.com

**Germany, Austria & Switzerland**  
+49 (0) 6103 7598 660  
germany@bradycorp.com

**Hungary**  
+36 23 500 275  
hungary@bradycorp.com

**Italy**  
+39 02 26 00 00 22  
italy@bradycorp.com

**Netherlands**  
+31 (0)70 323 62 98  
benelux@bradycorp.com

**Norway**  
+47 70 13 40 00  
norway@bradycorp.com

**Poland**  
+48 22 104 6262  
poland@bradycorp.com

**Qatar, Saudi Arabia & UAE**  
+971 4881 2524  
me@bradycorp.com

**Slovakia**  
+421 902 939 406  
slovakia@bradycorp.com

**South Africa**  
+27 11 704 3295  
africa@bradycorp.com

**Spain & Portugal**  
+34 900 902 993  
spain@bradycorp.com  
portugal@bradycorp.com

**Sweden, Finland, Estonia, Latvia, Lithuania**  
+46 (0) 8 590 057 30  
sweden@bradycorp.com

**Turkey**  
+90 212 264 02 20  
turkey@bradycorp.com

**UK & Ireland**  
+44 (0) 1295 228 288  
uk@bradycorp.com

We make products that make the world a safer and smarter place. From the depths of the ocean to outer space, from the factory floor to the delivery room - **we're just about everywhere you look.**



To help minimise our impact on the environment, Brady limits its number of reprints.

Updated versions are always available for download on [bradyeurope.com/downloads](https://bradyeurope.com/downloads).



Search for: EUR-M-258-EN



Y5107321

Your distributor